



GOLDEN SOLAR

Make Solar Energy More Efficient!



JGYC-210-20BB Heterojunction Solar Cells

✓ Heterojunction Cell Technology

A heterojunction cell combines all the advantages of crystalline and thin-film solar technologies in a single hybrid structure.

✓ High Bifaciality

The bifaciality is about 90%, and the power output of HJT cells is about 3%-6% higher than that of bifacial PERC and TopCon cells.

✓ Excellent Weak Light Performance

Under the lower irradiation intensity, HJT cells have an average of 1-2% more power per watt than PERC bifacial cells.

✓ The Highest Efficiency


By using 210 mm N-type silicon wafer, the highest power of HJT cells can be up to 5.68W, and its efficiency can be up to 25.7%.

✓ Higher Efficiency at High Temperature

The lowest temperature coefficient can be up to -0.243%/K. Under high temperature environments, the output of HJT cells per W is about 0.6-3.9% higher than that of bifacial TOPCon cells.

✓ Anti-PID

Battery surface is TCO, so charge will not produce polarization phenomenon on the cells' surface TCO.

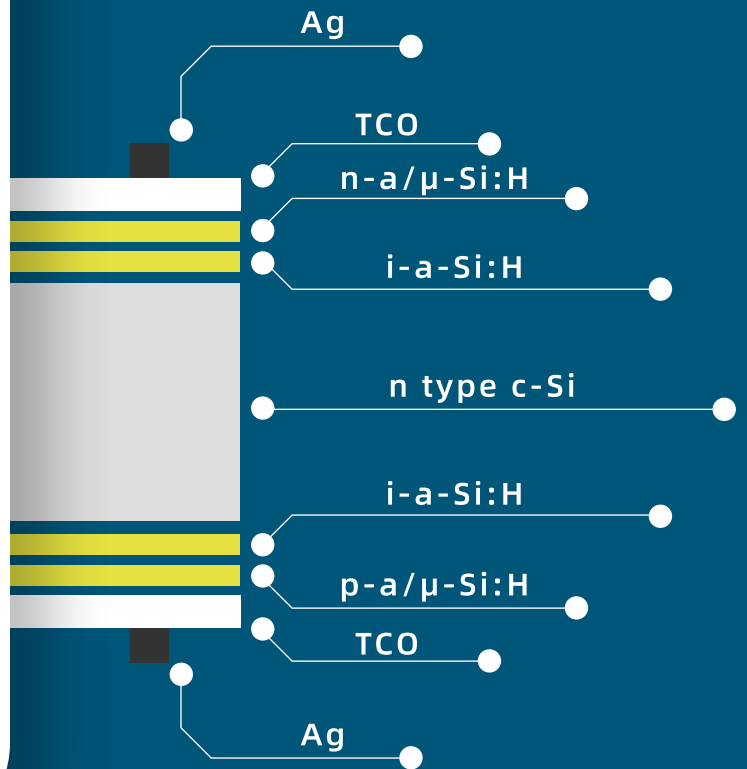


JGYC-210-20BB




GOLDEN SOLAR

The Cell's Front

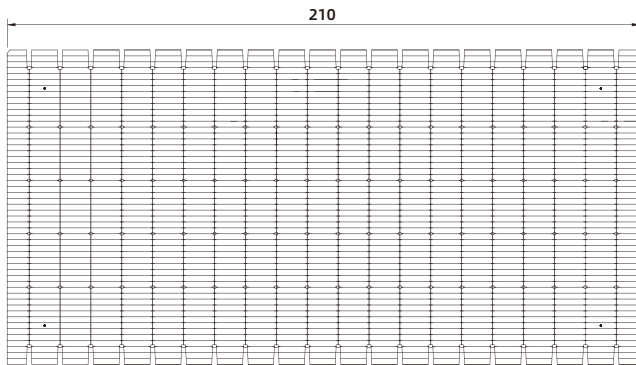

The Cell's Back

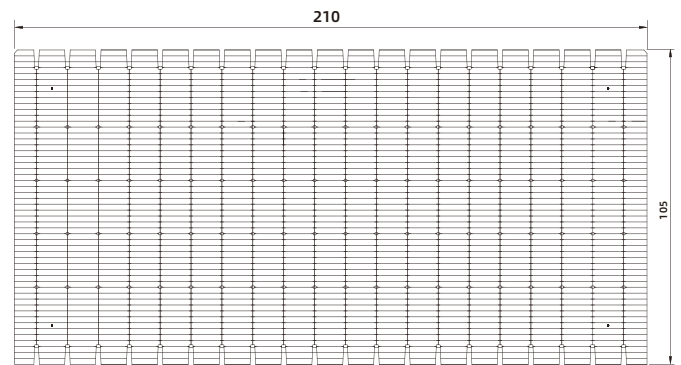

Electrical Performance Parameters

| Efficiency Range | Eff (%) | Pmpp (W) | Vmpp (V) | Impp (A) | Voc (V) | Isc (A) | FF (%) |
|------------------|---------|----------|----------|----------|---------|---------|--------|
| JG-210M-2570 | 25.7 | 5.68 | 0.681 | 8.320 | 0.7523 | 8.6998 | 86.83 |
| JG-210M-2560 | 25.6 | 5.65 | 0.680 | 8.309 | 0.7521 | 8.6810 | 86.62 |
| JG-210M-2550 | 25.5 | 5.63 | 0.679 | 8.293 | 0.7516 | 8.6687 | 86.47 |
| JG-210M-2540 | 25.4 | 5.61 | 0.678 | 8.271 | 0.7514 | 8.6512 | 86.33 |
| JG-210M-2530 | 25.3 | 5.59 | 0.677 | 8.260 | 0.7510 | 8.6469 | 86.07 |
| JG-210M-2520 | 25.2 | 5.57 | 0.675 | 8.243 | 0.7510 | 8.6358 | 85.86 |
| JG-210M-2510 | 25.1 | 5.55 | 0.674 | 8.233 | 0.7506 | 8.6311 | 85.61 |
| JG-210M-2500 | 25.0 | 5.52 | 0.671 | 8.230 | 0.7493 | 8.6442 | 85.26 |
| JG-210M-2490 | 24.9 | 5.50 | 0.669 | 8.229 | 0.7484 | 8.6528 | 84.96 |

The amplitude of Voc (Isc) decreasing with irradiation intensity based on STC (1000W/m², AM1.5, 25°C).

Irradiation Dependence Characteristics

| Irradiation (W/m ²) | Voc | Isc |
|---------------------------------|------|-----|
| 1000 | 1.0 | 1.0 |
| 900 | 0.99 | 0.9 |
| 800 | 0.99 | 0.8 |
| 600 | 0.98 | 0.6 |
| 400 | 0.96 | 0.4 |



Temperature Coefficient

| | |
|------|------------|
| Voc | -0.243 %/K |
| Isc | +0.032 %/K |
| Pmax | -0.243 %/K |



Mechanical data and Design

| | |
|-----------|--|
| Dimension | 210×105±0.25mm |
| Thickness | 110±11μm |
| Front (-) | 20*0.035mm main busbars(silver), 58 sub-busbars(silver or copper clad silver), blue transparent conductive film (TCO) |
| Back (+) | 20*0.035mm main busbars(silver), 100 sub-busbars(silver or copper clad silver), blue transparent conductive film (TCO) |

I-V Curves

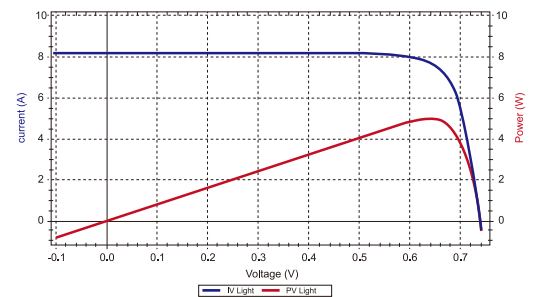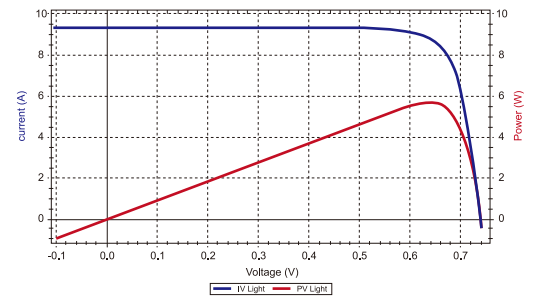

Spectral Response

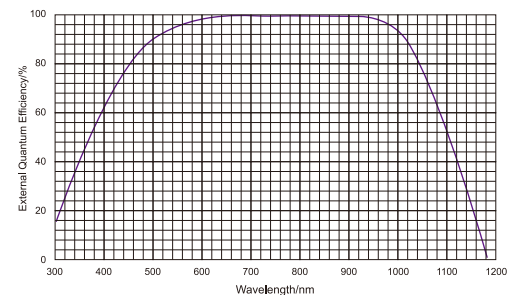

*The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the ongoing innovation and product enhancement. Golden Solar reserves the right to make necessary adjustments to the information described herein at any time without further notice.