

# Lumina II



## Super Power Output

SolarSpace advanced TOPCon cells combined with MBB and high-density encapsulation provides ultra-high power output



## High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



## Extra power generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1<sup>st</sup> year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



## Aesthetic Design

Aesthetic design brings highly consistent appearance for rooftops

**SolarSpace Technology Co., Ltd.** was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 50GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

\*Please refer to SolarSpace for details

## SS8-54HDT 410-430N


N-TOPCon Bifacial Dual Glass Module  
(Transparent Back Glass)

# 430W

Maximum  
Power Output

# 22.02%

Maximum  
Module Efficiency

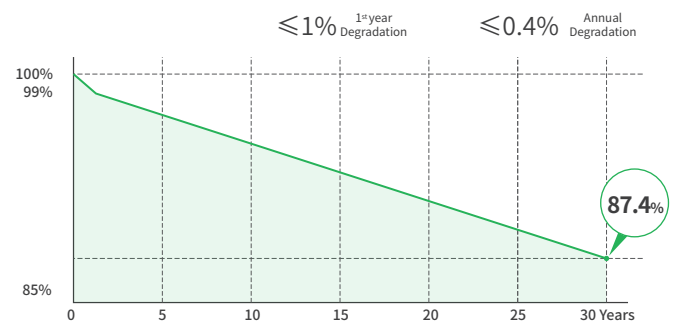

**15**Years Product Warranty **30**Years Linear Power Warranty

### Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt mist corrosion test • IEC62716: Ammonia corrosion test
- IEC60068: Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



# N-TOPCon Bifacial Dual Glass Module (Transparent Back Glass) **SS8-54HDT 410-430N**

## Electric Characteristics (STC)

Module Type	SS8-54HDT	SS8-54HDT	SS8-54HDT	SS8-54HDT	SS8-54HDT
	-410N	-415N	-420N	-425N	-430N
Maximum Power (Pmax) [W]	410	415	420	425	430
Open-Circuit Voltage (Voc)[V]	37.51	37.70	37.89	38.08	38.27
Maximum Power Voltage (Vmp) [V]	31.49	31.67	31.85	32.03	32.21
Short-Circuit Current (Isc)[A]	13.81	13.91	13.99	14.07	14.13
Maximum Power Current (Imp) [A]	13.03	13.11	13.19	13.28	13.36
Module Efficiency	21.00%	21.25%	21.51%	21.76%	22.02%


Irradiation 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

## Electric Characteristics (NMOT)

Module Type	SS8-54HDT	SS8-54HDT	SS8-54HDT	SS8-54HDT	SS8-54HDT
	-410N	-415N	-420N	-425N	-430N
Maximum Power (Pmax) [W]	311	315	319	323	327
Open-Circuit Voltage (Voc)[V]	36.06	36.24	36.42	36.60	36.78
Maximum Power Voltage (Vmp) [V]	29.63	29.81	29.99	30.17	30.34
Short-Circuit Current (Isc)[A]	11.26	11.33	11.40	11.47	11.54
Maximum Power Current (Imp) [A]	10.50	10.57	10.64	10.71	10.78

Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5

## Engineering Design

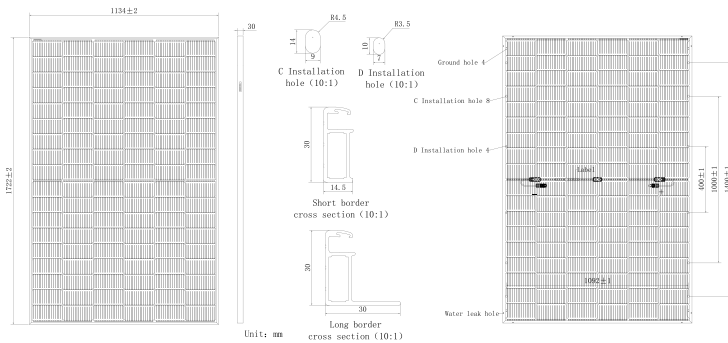

## Bifacial Output-Rearside Power Gain (420W)

Power Gain	5%	10%	15%	20%	25%
	Maximum Power (Pmax) [W]	441	462	483	504
Open-Circuit Voltage (Voc)[V]	38.10	38.10	38.10	38.20	38.20
Maximum Power Voltage (Vmp) [V]	31.94	31.94	31.94	31.95	31.95
Short-Circuit Current (Isc)[A]	14.51	15.06	15.60	16.16	16.71
Maximum Power Current (Imp) [A]	13.81	14.47	15.13	15.78	16.44

## Temperature coefficients


Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.260%/°C
Temperature coefficient of Pmax	-0.290%/°C
NMOT	45±2°C

## Mechanical Characteristics


Cell Type	N-TOPCon(M10)
Number of Cells	108(6x18)
Dimensions	1722X1134X30mm
Weight	24.0kg
Glass	Front glass, 2.0mm coated semi-tempered glass Back Glass, 2.0mm transparent semi-tempered glass
Frame	Black, Anodized Aluminum Alloy
Output Cables	4mm <sup>2</sup> (IEC), 12AWG(UL), 300mm (including connector) or 1200mm(including connector) Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	36 Pieces/Pallet, 936 pieces/40' container

## Characteristics

I-V/P-V Curve at Different Irradiation  
SS8-54HDT-420N

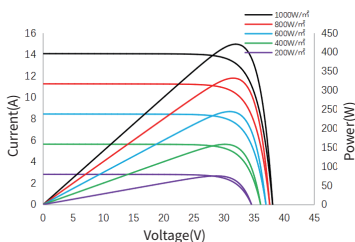

I-V Curve at Different Temperature  
SS8-54HDT-420N

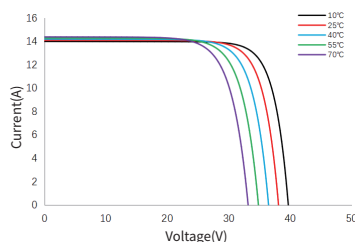

## Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80±5%



Solarspace Technology Co., Ltd.

Specifications included in this datasheet are subject to change without notice. Solarspace reserves the right of final interpretation.

www.solarspacepower.com contact@solarspacepower.com

Version No: EU 202403