

## Solar Slate Plate Data Sheet

Solar on slate made easy





Quick and simple solar installations using Solar Slate Plate. No cutting. No sealants. No leaks.



Manufactured using high quality materials, with the polycarbonate plate's working temperature of -40 °C to 130 °C.



With no need to cut any slates, health and safety risks are reduced.



Cost saving due to reduced installation times with no need to purchase replacement slates.



No excess pieces of slates to dispose of means for a clean installation.



No need to use mastics or sealants to provide weather proofing.




Choice of 2 universal roof hooks for different rail types, meaning the right tool will be available for the job at hand.




No need to carry bags of tools onto the scaffolding.




Includes full 10 year product guarantee.








Issue 24 March 2016 Patented Design (GB2511223)

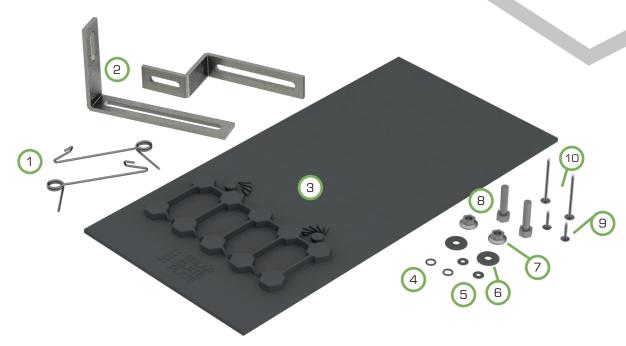


- Torsion Springs304 Stainless Steel
- 2 L / Z Roof Hook304 Stainless Steel
- 3 Solar Slate Plate
  UV-stabilised Polycarbonate
- 4 **O-Rings**Nitrile 70 IRHD
- 5 **Bonded Washers** Alu/EPDM

- 6 7 x 19 x 3 Washers EPDM
- 7 M8 Nyloc Flanged Nuts A2-70 Stainless Steel
- 8 M8 Bolts
  A2-70 Stainless Steel
- 9 25mm Flat-head Screws Zinc Coated Steel
- 10 **90mm M6 Screws** A2-70 Stainless Steel



Sizes Available				
Α	х	В		
24" / 600mm	х	12" / 300mm		
22" / 550mm	х	12" / 300mm		
20" / 500mm	х	12" / 300mm		
18" / 450mm	х	12" / 300mm		
16" / 400mm	х	12" / 300mm		
22" / 550mm	х	11" / 275mm		
20" / 500mm	х	11" / 275mm		
20" / 500mm	х	10" / 250mm		
18" / 450mm	х	10" / 250mm		
16" / 400mm	х	10" / 250mm		
20" / 500mm	х	9" / 225mm		
18" / 450mm	х	9" / 225mm		
16" / 400mm	х	9" / 225mm		



Sizes Available				
Α		x	В	
L Hook	110 mm	х	175 mm	
Z Hook	60 mm	х	185 mm	

