


## Solar Ocean

### 425–440 Watt TOPCon MONO-FACIAL MODULE

- IEC61215: 2021
- IEC61730: 2016
- TUV Rheinland Standard
- Lloyd'S Ariel Re
- Solar Performance Insurance
- ISO9001: 2015
- Quality Management System
- ISO14001:
- Environmental Management System
- CE: Europe Standard
- Inmetro Certificate
- Japan JP-AC

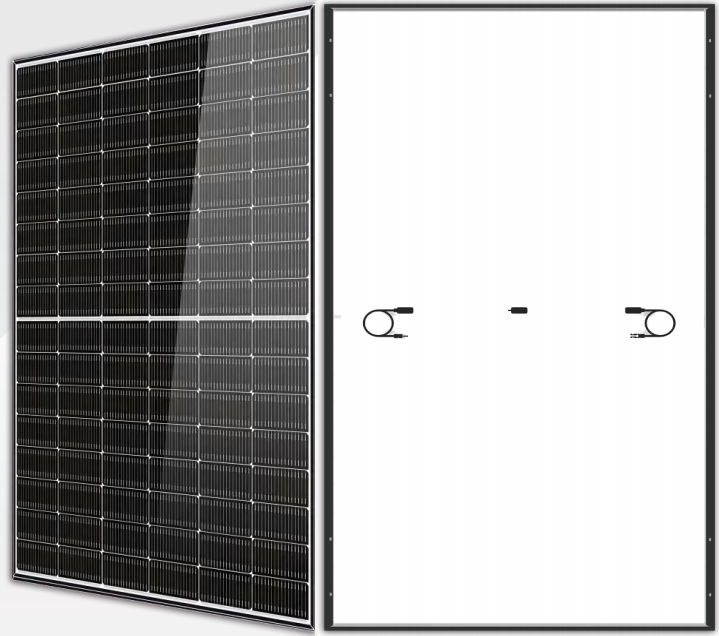

#### KEY FEATURES



**SMBB Cell**  
More uniform current collection capability, reducing the current heat loss of the internal cells.



**Low Light Features**  
Higher performance under low light environment.



**Higher Output Power**  
The output power of 96 half-cells Monocrystalline modules is up to 440W.




**LID Free**  
N-type solar cell has no LID naturally which can increase power generation.



**Harsh Environmental Adaptability**  
Strict salt spray and ammonia corrosion test by the third party.



**Load Capacity**  
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa.

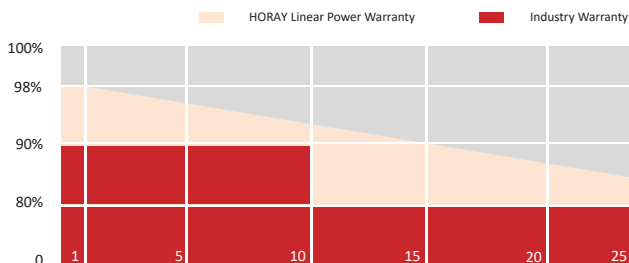


HEADQUARTER: HORAY SOLAR CO., LTD.

GLOBAL MARKETING AND SERVICE: HORAY SOLAR GMBH

✉ sales@horaysolar.com 🌐 www.horaysolar.com ☎ +86-510 83580688  
📍 NO.30-5, East Yanxin Road, Huishan District, Wuxi 214177 Jiangsu P.R China

✉ info@horaysolar.com 🌐 www.horaysolar.com  
📍 Robert-Bosch-Str. 29,Langen, Frankfurt am Main, Germany

## MECHANICAL DIAGRAMS

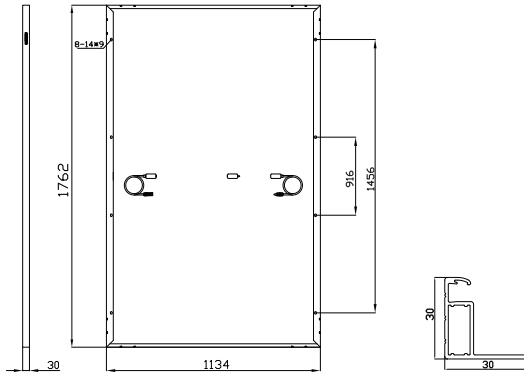

## SPECIFICATIONS

Weight	21kg
Dimension	1762mm*1134mm*30mm
Cell Dimension	182*105mm
Cell Amount	48*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm <sup>2</sup> ,+300,-300mm, Length can be customized
Connector	MC4 compatible
Application Level	Class A

## ELECTRICAL PARAMETERS AT STC

Module Type	HS425TC-MHC	HS430TC-MHC	HS435TC-MHC	HS440TC-MHC
Power	425W	430W	435W	440W
Open Circuit Voltage	34.37V	34.50V	34.60V	34.75V
Short Circuit Current	13.93A	13.96A	13.98A	14.01A
Maximum Power Voltage	31.68V	31.81V	31.86V	31.90V
Maximum Power Current	13.42A	13.53A	13.64A	13.78A
Module Efficiency	21.28%	21.54%	21.75%	22.00%

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL PARAMETERS AT NMOT

Power	324W	328W	331W	335W
Open Circuit Voltage	34.37V	34.50V	34.60V	34.75V
Short Circuit Current	10.61A	10.64A	10.65A	10.68A
Maximum Power Voltage	31.68V	31.81V	31.86V	31.90V
Maximum Power Current	10.23A	10.31A	10.39A	10.50A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.


## TEMPERATURE CHARACTERISTICS

NMOT	45±2°C	Temp Coefficient of ISC	+0.05%/°C
Temp Coefficient of VOC	-0.28%/°C	Temp Coefficient of Pmax	-0.34%/°C

## PACKING CONFIGURATION

Modules/Pallet	36 Pieces	Modules/40' Container	936 Pieces
Packaging Description	26 Pallets, Total=(36*36)x13=936 Pieces		

## IV CHARACTERISTICS

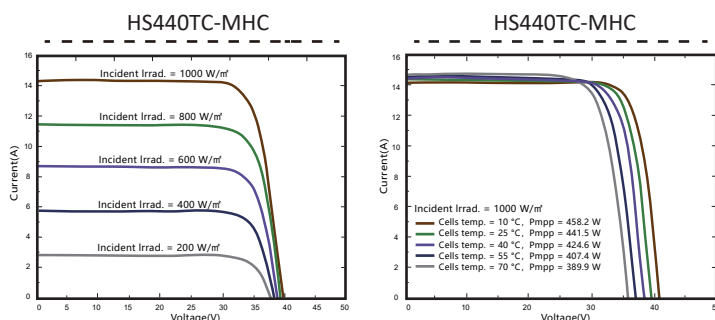

## MAXIMUM RATING

Power selection	0~+5W
Measuring uncertainty of Pm	0~±3%
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A

**15 YEARS** Quality Warranty

**25 YEARS** Power Warranty

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2024 Horay Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version number: MHC\_EN\_2024\_A