



mounting systems



Ramp System ProLine

Application	Ground-mount, flat-roof
Height of Building	Depends on wind loads on site
PV modules	Framed, frameless
Module layout	Rows up to approx. 12m per frame unit
Module orientation	Portrait, landscape
Pitch	15°
Supporting profiles	Extruded aluminium (ENAW 6063 T66)
Small parts	Stainless steel (V2A), Extruded aluminium (ENAW 6063 T66)
Color	Zinc, aluminium
Warranty	10 Years




Ground mount



Flat-roof



Framed Module



Frameless Module



Orientation portrait



Orientation landscape


Configuration

2x Portrait


3x Portrait

3x Landscape

4x Landscape

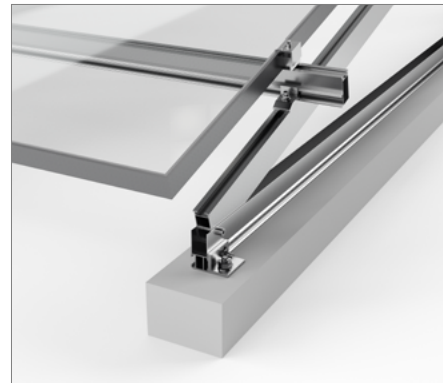

Adapter for dowels

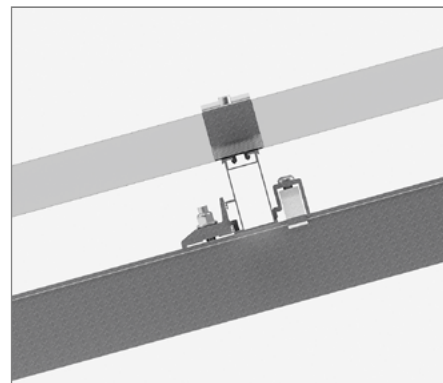

Side view (cross rail options)



For further information: www.mounting-systems.com
Subject to technical changes.
2023 © Mounting Systems GmbH