


0~+5W Positive power tolerance | 20,50% Maximum efficiency

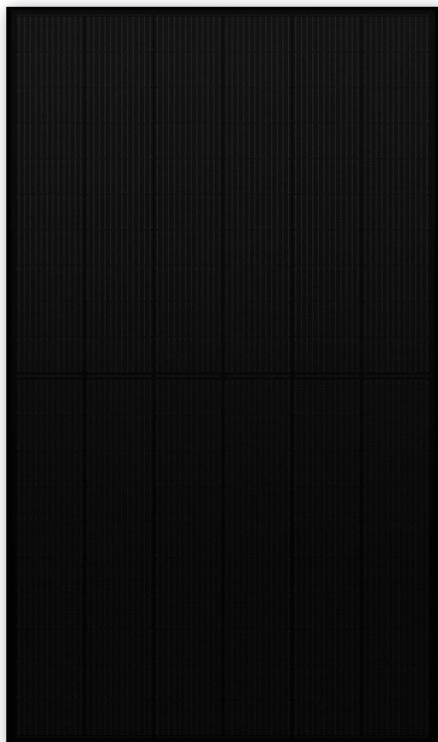

## JNL SOLAR, A HIGH-QUALITY MODULE THROUGH ITS HIGH PERFORMANCE CONSTRUCTION

Extensive experience in technology, constant innovation and sustainable optimisation form the basis for the performance of our high-quality modules. JNL Solar carries out all stages of construction at its production site, enabling us to guarantee our customers the highest quality in every step, from assembly to finishing.

Our modules are extremely versatile in their use. They offer suitable solutions for any installation and sustainable performance around the world..



Additional efficiency and easy maintenance thanks to the highly transparent self-cleaning glass.



Elegant design for perfect integration on the roof - a completely black photovoltaic module from cell to frame.



Long-term safety and top performance guaranteed. 25 year performance guarantee and 25 year product guarantee.



High reliability through rigorous quality control. More than 30 internal tests (UV, HF, and many others). Our tests go beyond certification requirements.



PID resistance and hotspot protection verified and rigorously produced.



Ideal for private or commercial installations. High power reduces installation costs.



High conversion efficiency through high quality modules and advanced cell technology.



Front panel with anti-reflective coating.




Our panels are tested and certified to withstand extreme environmental conditions: wind loads (2400 Pa) and snow loads (5400 Pa).



## MECHANICAL DATA




Dimensions	1755 mm x 1038mm x 35/30mm (with frame)
Weight	20,5 kg
Solar Cells Type	Monocrystal Silicon 166mm x 83mm
Glass	3,2mm
Frame	Anodized Aluminium Alloy
Junction Box	>IP67
Cables	4mm <sup>2</sup> , 1200mm
Connector	MC4 Compatible
Wind/Snow Load	≤ 2400 Pa / 5400 Pa

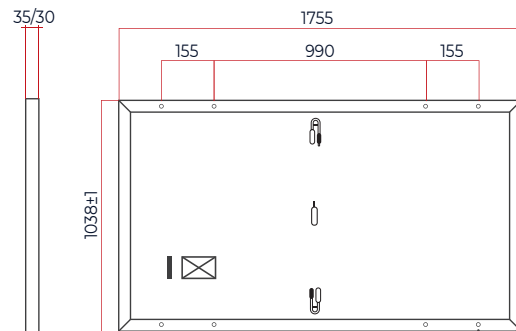

## ELECTRICAL DATA

POWERS CLASSES		360	365	370	375	380
Peak Power	$P_{max}$	360	365	370	375	380
Open Circuit Voltage	$V_{oc}$	40,90	41,10	41,30	41,50	41,70
Max. Power Voltage	$V_{mpp}$	33,90	34,10	34,30	34,50	34,70
Short Circuit Current	$I_{sc}$	11,23	11,32	11,41	11,49	11,58
Max. Power Current Imp	$I_{mp}$	10,62	10,71	10,79	10,87	10,96
Module Efficiency		19,60%	19,90%	20,20%	20,50%	20,70%
Power Tolerance		0~+5W				
Max. System Voltage		DC 1500V (TUV) / 1000V (UL)				
Max. Series Fuse Rating		20A				

STC : Irradiance 1000W/m<sup>2</sup>, 25°C, AM 1.5

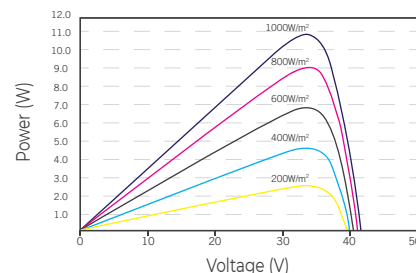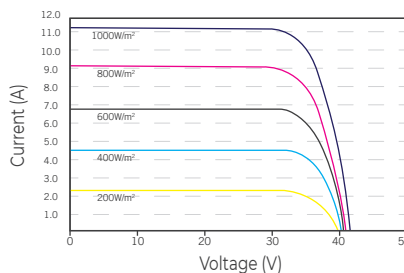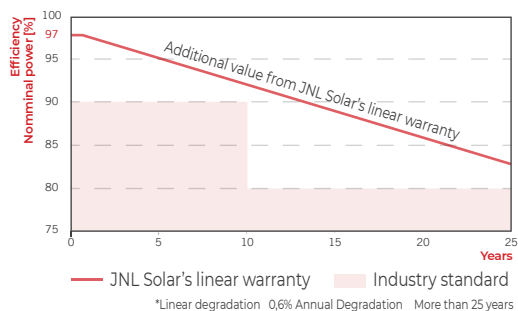


## TEMPERATURE RATINGS

Temperature Coefficient of Isc	0.05%/°C	Operational Temperature	-40±85°C
Temperature Coefficient of Voc	-0.30%/°C	NOCT (Nominal Operating Cell Temperature)	41±3°C
Temperature Coefficient of Pmax	-0.35%/°C		

## PACKAGING CONFIGURATION

Container	40 HQ
Quantity / pallet	30 pieces
Pallets / Container	26 pieces
Quantity / container	780 pieces

## AUTHORIZED DEALER



## CERTIFICATIONS



IEC 61215-1:2016 - IEC 61215-1-1:2016 - IEC 61215-2:2016 - IEC 61730-1:2016 - IEC 61730-2:2016 - EN 61215-1:2016 - EN 61215-1-1:2016 - EN 61215-2:2017 - EN IEC 61730-1:2018 - EN IEC 61730-1:2018/AC:2018-06 - EN IEC 61730-2:2018 - EN IEC 61730-2:2018/AC:2018-0

**CAUTION:** Read the instructions for safety installations before using the product JNLSolar (All rights reserved) © 2022. Specifications included in this data sheet are subject to change without notice.