



A.R.E GROUP

HORUS

325 / 340

**EXCELLENT HIGH EFFICIENCY
ROBUST DESIGN**

**HIGH IRRADIANCE PERFORMANCE
& INSULATION**

**IP67 JUNCTION BOX FOR LONG
TERM WEATHER ENDURANCE**



SGS
TÜV CE
S A A R



**A.R.E GROUP MODULE
6PA SERIES
325-340 W
POLYCRYSTALLINE
SOLAR MODULE**

**72 CELL
MULTICRYSTALLINE
MODULE**

**18.6 %
MAXIMUM
EFFICIENCY**

**OPTIMIZED FOR ALL
SUNLIGHT CONDITONS
± 3% POSITIVE POWER TOLERANCE**

**IDEAL FOR LARGE
SCALE INSTALLATIONS
MORE POWER PER M²**

**LINEAR PERFORMANCE
WARRANTY
12 YEARS PRODUCT
25 YEARS LINEAR POWER WARRANTY**

COMPANY:

Smart Village,
K26 Cairo-Alex Desert Rd.
Building of The Arab Academy,
82401 - First Floor.
Phone and fax: +2 0235370334 / 5
Mob: +2 01030881177
Email :sales@aregroupeg.com

FACTORY:



Industrial Zone of Qeft
The first stage is the cutting
of 13-17. Qeft Center
Qena Governorate.
Phone and Fax
+02 0963420160/1/2/3/4
Website: www.aregroupeg.com

HORUS 325/340




A.R.E GROUP

DIMENSIONS OF PV MODULE

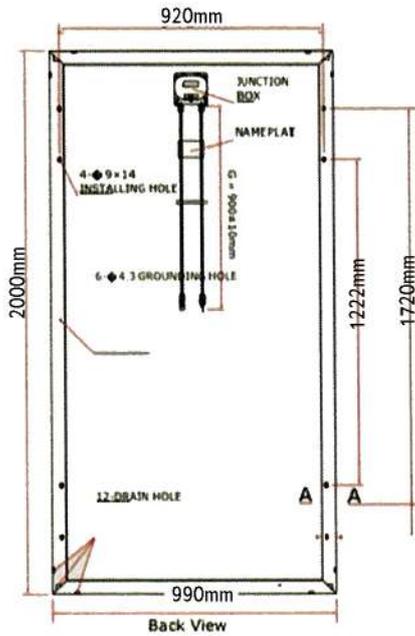


I-V CURVES OF PV MODULE

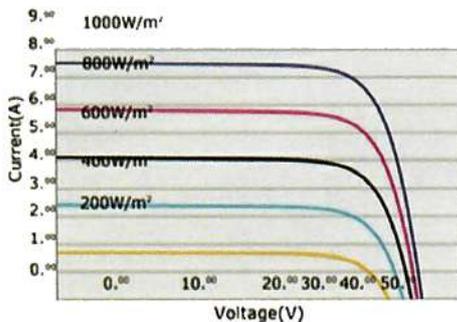

Dealer Information



Electrical Data @ STC	ARE-HORUS325	TEST	ARE-HORUS335	AREHORUS340
Pmp{W} /Tolerance ±5%	325	330	335	340
Voc{V} /Tolerance ±5%	45.8	45.9	46.1	46.2
Vmp{v}	37.5	37.6	37.8	37.9
Imax {Adc}	8.6	8.7	8.8	8.9
Isc{Adc}/Tolerance ±5%	9.02	9.12	9.22	9.32
Maximum system Voltage {V}	1000	1000	1000	1000
Maximum Over-Current	15	15	15	15
Protection Rating {A}				
Module Efficiency	18.4	18.5	18.5	18.6

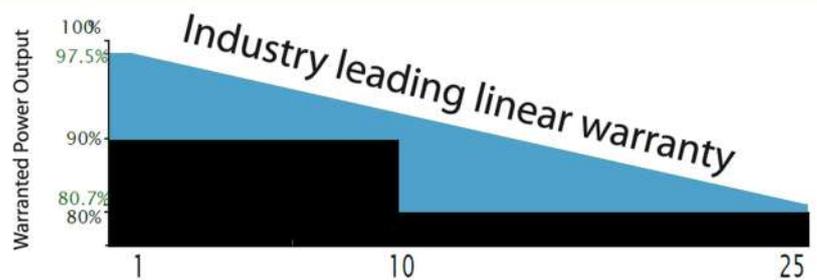

MECHANICAL DATA

Solar Cells	Multicrystalline 156.75 X 156.75 mm
Cell Orientation	72 cells (6x1)
Module dimensions	1956x992x40mm
Weight	25.0 kg
Glass	High Transparency Anti Reflective, AR Coated and Heat Tempered Solar Glass - 3.2 mm
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 rated
Cables	Photovoltaic Technology Cable 4.0 mm ² , 900mm (Customized Available)
Connector	MC4 compatible

TEMPERATURE RATINGS

MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C (±2°K)	Operational Temperature	-40~+85°C
		Maximum System Voltage	1000v DC (IEC)
	MAX -0.41 %/K	Voltage	
Temperature Coefficient of P _{oc}	- 0.32%/K	Max Series Fuse Rating	15A
Temperature Coefficient of V _c	0.05%/K	Mechanical Load	5400pa
Temperature Coefficient of I		Wind Load	2400pa

PACKAGING CONFIGURATION

WARRANTY

Modules Per box : 28 Pieces/22 Pieces	10 years workmanship warranty
Modules Per 40' container : 660 Pieces	25 years linear performance warranty

(Please refer to product warranty for details)

INSURANCE

Product liability insurance with CHUBB Group
Product Performance (E&O)insurance CHUBB Group