



GLORY TOPCon

DEF_O8A / 144 cells

565 W - 590 W

Mono-Crystalline Bifacial PV Module

United Renewable Energy Co., Ltd. (a company from Taiwan where the sun shines) Glory TOPCon module uses URECO TOPCon monocrystalline bifacial solar cells, and URECO advanced glass(G2G) module manufacturing technology.



Key Features



Multi-Bus bar/ TLS technology
Increase the stability of outdoor power generation



Better bifaciality
High bifacial rate



PID resistance
Excellent PID resistance performance



Excellent low light performance
First year power degradation 1%
Annual degradation 0.4% each year



Superior temperature coefficient
Better performance in high temperature



Withstand heavy loading
Equivalent to the Beaufort wind scale 17 validation



NO Water pollution concern
PASS the water quality standard by E.P.A



High Durability
High resistance to salt mist & PID design
Pass the highest level
(IEC 61701/ IEC 60068-2-52 Severity 8)



Electrical Data

Model		Bifacial Gain			Bifacial Gain			Bifacial Gain		
		DEF56508A	5%	10%	DEF57008A	5%	10%	DEF57508A	5%	10%
Maximum Rating Power (Pmax)	[W]	565	593	622	570	599	627	575	604	633
Module Efficiency	[%]	21.87	22.96	24.06	22.07	23.17	24.28	22.26	23.37	24.49
Open Circuit Voltage (Voc)	[V]	50.87	50.87	50.87	51.06	51.06	51.06	51.24	51.24	51.24
Maximum Power Voltage	[V]	41.99	41.99	41.99	42.17	42.17	42.17	42.35	42.35	42.35
Short Circuit Current (Isc)	[A]	14.20	14.91	15.62	14.26	14.97	15.69	14.32	15.04	15.75
Maximum Power Current	[A]	13.45	14.12	14.80	13.51	14.19	14.86	13.57	14.25	14.93
Model		DEF58008A	5%	10%	DEF58508A	5%	10%	DEF59008A	5%	10%
Maximum Rating Power (Pmax)	[W]	580	609	638	585	614	644	590	620	649
Module Efficiency	[%]	22.45	23.57	24.70	22.64	23.77	24.90	22.83	23.97	25.11
Open Circuit Voltage (Voc)	[V]	51.42	51.42	51.42	51.60	51.60	51.60	51.78	51.78	51.78
Maximum Power Voltage	[V]	42.53	42.53	42.53	42.71	42.71	42.71	42.88	42.88	42.88
Short Circuit Current (Isc)	[A]	14.38	15.10	15.82	14.44	15.16	15.88	14.50	15.23	15.95
Maximum Power Current	[A]	13.63	14.31	14.99	13.69	14.37	15.06	13.75	14.44	15.13
Positive Power Tolerance		0~3%								

*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m², AM 1.5

*Values without tolerance are typical numbers.Measurement tolerance: ±3%

Mechanical Data

Item	Specification
Dimensions	2278 mm (L) ¹ x 1134 mm (W) ¹ x 35 mm (D) ² / 89.69" (L) ¹ x 44.65" (W) ¹ x 1.38" (D) ²
Weight	31.20 kg / 68.78 lbs
Solar Cell	144 half-cut monocrystalline M10 N-type TOPCon cells
Front Glass	2.0mm AR-Coating, strengthened glass
Rear Glass	2.0mm strengthened glass
Frame	Anodized aluminum alloy
Junction Box	IP68, 3diodes
Cables	4.0mm ² (IEC), 12AWG (UL)
Connectors	EVO2A (1500V)
Package Configuration	30 pcs Per Pallet, 600 pcs per 40' HQ container

1 : With assembly tolerance of ± 2 mm [± 0.08"]

2 : With assembly tolerance of ± 0.8 mm [± 0.03"]

Operating Conditions


Item	Specification
Mechanical Load	7200 Pa
Maximum System Voltage	1500 VDC
Series Fuse Rating	25 A
Operating Temperature	-40 to 85 °C

Temperature Characteristics


Item	Specification
Nominal Module Operating Temperature	43°C ± 2°C
Temperature Coefficient of Isc	0.05 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Pmax	-0.30 % / °C

*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m², temperature 20°C, windspeed 1 m/s.


Engineering Drawing (mm)

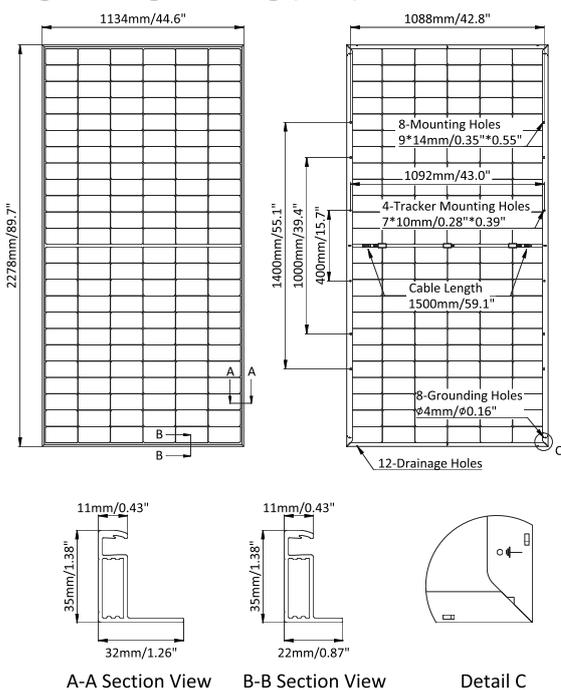

Dependence on Irradiance

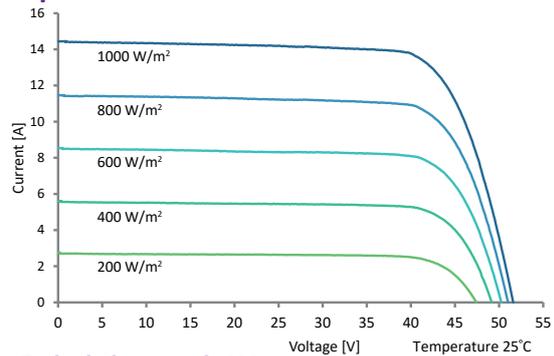

Reliability with Warranty

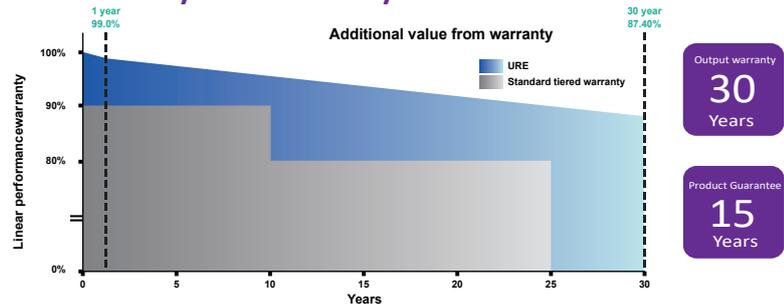

For more information, please visit us at www.urecorp.com