

182P-Type

21.86%


Maximum Efficiency

565W

Maximum Power Output

ET-M772BHXXXGL

XXX:Power Output Range 545-565W

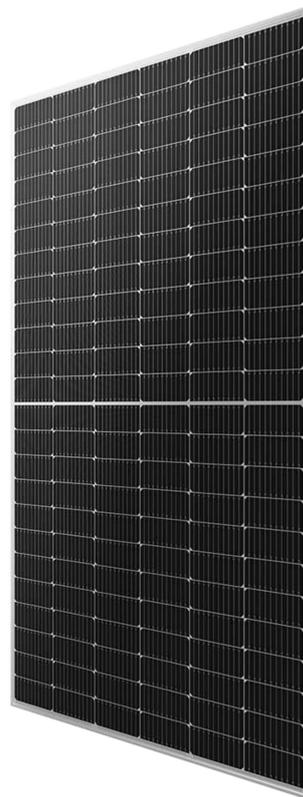

Increased Efficiency

Increased module conversion efficiency from half cut cell structure (low resistance characteristic, decreased mismatch loss).



Increased Power Generation

Bifacial technology enables additional energy harvesting from rear side (up to 25%)



PID

PID Resistance

Excellent Anti-PID performance guarantees limited power degradation for mass production.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability Against Extreme Environmental Conditions


Exceptional durability against salt mist and ammonia exposure.



IEC61215
IEC61730
UL61215
UL61730



WARRANTY

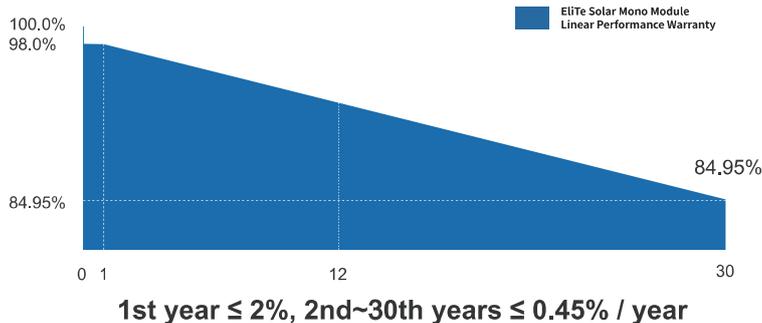

Linear power output warranty



Guarantee on product material and workmanship

