




**PHILADELPHIA SOLAR**  
DELIVERING CLEAN ENERGY SOLUTIONS

# Iris

## Monofacial Module

Module : PS-M132(HCF)-xxxW

# 500-510W

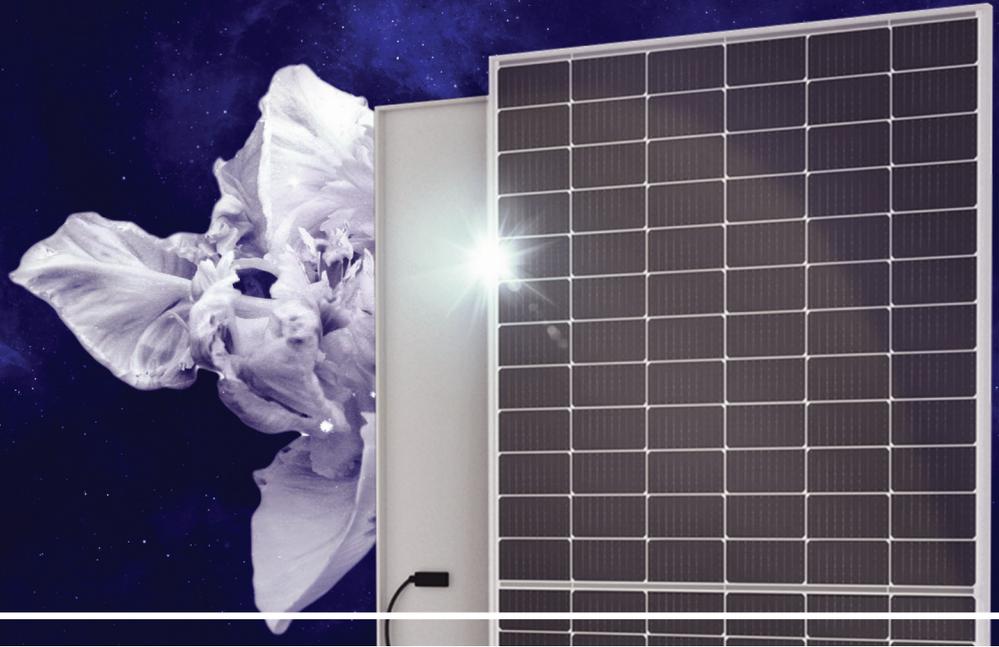

Philadelphia Solar's Mono-Crystalline modules with power up to **510 Wp** are produced using the state-of-the-art (automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

### CERTIFICATIONS

IEC 62782:2016 Dynamic load  
IEC TS 62804 PID Resistance  
IEC 60068 Dust and Sand Resistance  
IEC 62716 Ammonia Resistance  
IEC 61701 Salt Mist Resistance  
UL 61215 / UL 61730  
IEC 61215 / IEC 61730  
EN ISO 9001: 2015  
Quality Management System  
EN ISO 14001: 2015  
Environmental Management System  
EN ISO 45001: 2018  
Occupational health and safety management systems



### APPLICATIONS



On-Grid Residential Roof-Tops



On-Grid Commercial/ Industrial Roof-Tops



Off-Grid Systems (Including Lighting Systems)



Solar Power Plants


### FEATURES

- Module's Cell Efficiency up to 21.5%
- Lower microcrack problem loss comparing with 5-busbar module
- Lower internal resistance loss
- Lower degradation PERC technology
- Less partial shading current mismatch loss so more power output.
- Better temperature coefficients come from half-cell design.



Made In Jordan

### LINEAR PERFORMANCE WARRANTY

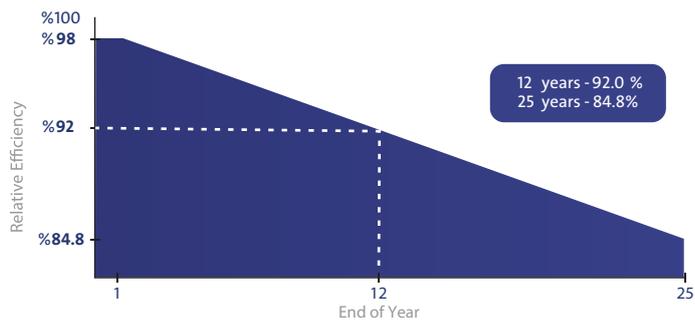

12 Year Product Warranty



25 Year Linear Power Warranty



Only -0.55% Annual Degradation

## ELECTRICAL CHARACTERISTICS




POWER AT STC	500 W	505 W	510 W
Short Circuit Current - I <sub>sc</sub> (A)	13.91	13.96	14.01
Maximum Power Current - I <sub>mpp</sub> (A)	13.25	13.30	13.36
Open Circuit Voltage - Voc (V)	45.69	45.86	46.09
Maximum Power Voltage - V <sub>mpp</sub> (V)	37.75	37.98	38.18
Module Efficiency - η' (%)	21.0%	21.2%	21.5%

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25° C).

## MATERIAL CHARACTERISTICS

Characteristics	Value
Cells per Module	132 (66 x 2)
Cell Type	Grade A - Mono PERC Crystalline Silicon
Front Surface	Anti-Reflective Coated Tempered 3.2 mm Glass
Encapsulant	PID Free EVA
Back Cover	White Backsheet
Frame	Anodized Aluminum
Junction Box	IP68, 3 Bypass Diodes
Cable Length	300mm Cables Length (Can be Customized)
Fire Classification	Type I

## Module Drawings

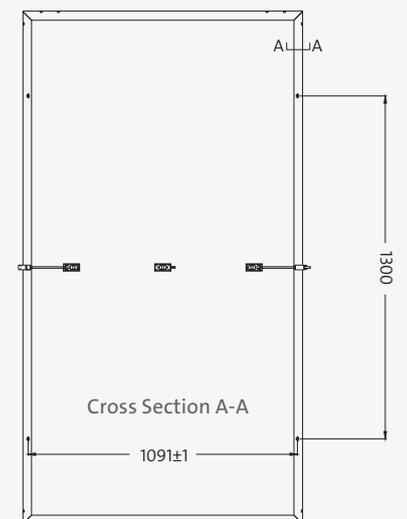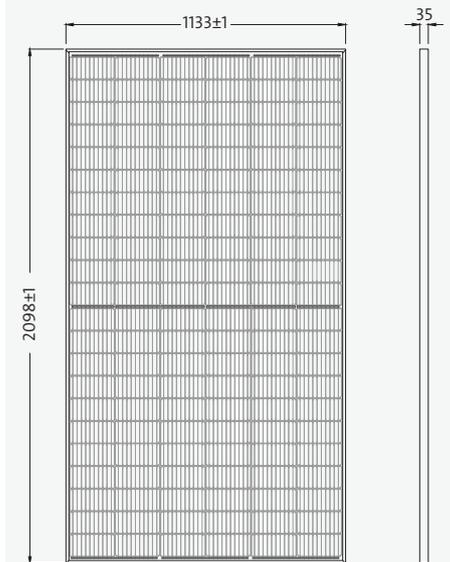

## THERMAL CHARACTERISTICS

Characteristics	Value
Open Voltage Temperature Coefficient VOC (%/C°)	-0.22
Short Circuit Current Temperature Coefficient ISC (%/C°)	+0.05
Power Temperature Coefficient PMP (%/C°)	-0.35
NOCT (°C)	45±2

## PHYSICAL CHARACTERISTICS

Characteristics	Value
Module Dimensions (mm)	2098±1 x 1133±1 x 35±1
Module Weight (kg)	26 ± 1 Kg
Packaging	Value
Modules per Pallet	31
40 Feet High-Cube Container	682 Modules

## OPERATING CONDITIONS

Maximum System Voltage - V <sub>max</sub> (V)	1500
Maximum Series Fuse (A)	25
Operating Temperature Range (°C)	IEC: -40 to +85 UL: -40 to +90

Mechanical Load	Value
Max Static load (Front)	5400 Pa
Max Static load (Back)	2400 Pa
Dynamic load	1000 Pa

- ◆ Power measuring tolerance: ±3%, other measurements tolerances: ±5%.
- ◆ Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.
- ◆ Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines