

HJT SOLAR MODULE



BEC-HJT | 690-715 W-HD

MBB HALF-CELL N-Type HJT Bifacial Double Glass Monocrystalline PV Module

690-715W

POWER RANGE

23.0%


MAXIMUM EFFICIENCY

0.30%

YEARLY DEGRADATION

15 25 YEARS PRODUCT WARRANTY

30 25 YEARS OUTPUT GUARANTEE

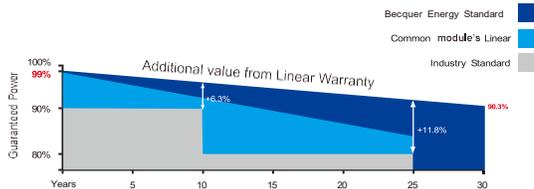

*Please check the valid version of Limited Product Warranty which is officially released by Becquer Energy Private Limited.



IEC 61215/IEC 61730

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets. Please contact your local sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

Key Features



Excellent Cells Efficiency

SMBB technology reduces the distance between busbars and finger grid lines which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light conditions, such as haze, cloudy, and early morning.



Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, hot temperature, and high humidity environment.



Reaction to Fire Class 1

In conformity with standard UNI 9177:1987, reaction to fire class 1.




Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.

BEC-HJT | 690-715 W-HD

MBB HALF-CELL N-Type HJT Bifacial
Double Glass Monocrystalline PV Module

Dimensions of PV Module

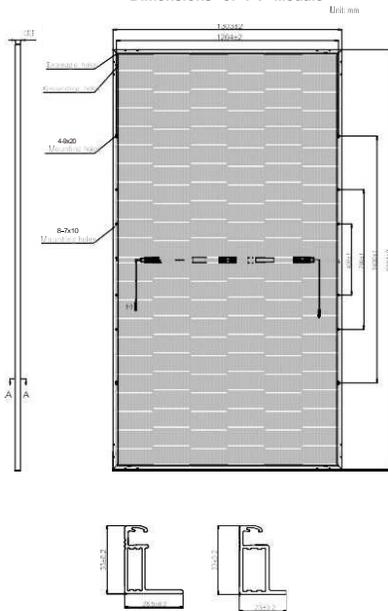

ELECTRICAL DATA (STC)

Model Type	(690-715)W-HD					
Rated Power in Watts-Pmax(Wp)	690	695	700	705	710	715
Open Circuit Voltage-Voc(V)	49.65	49.74	49.83	49.92	50.01	50.10
Short Circuit Current-Isc(A)	17.66	17.74	17.82	17.91	17.99	18.07
Maximum Power Voltage-Vmpp(V)	41.63	41.71	41.78	41.86	41.93	42.01
Maximum Power Current-Impp(A)	16.60	16.68	16.77	16.86	16.93	17.02
Module Efficiency (%) *	22.2	22.4	22.5	22.7	22.9	23.0

STC: Irradiance 1000 W/m², Cell Temperature 25° C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor: ss + 10% * Module Efficiency (%): Rounding to the nearest number

Electrical characteristics with 10% rear side power gain

Total Equivalent power -Pmax (Wp)	759	765	770	776	781	787
Open Circuit Voltage-Voc(V)	49.65	49.74	49.83	49.92	50.01	50.10
Short Circuit Current-Isc(A)	19.43	19.51	19.60	19.70	19.79	19.88
Maximum Power Voltage-Vmpp(V)	41.63	41.71	41.78	41.86	41.93	42.01
Maximum Power Current-Impp(A)	18.26	18.35	18.44	18.55	18.63	18.72

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

Model Type	(690-715)W-HD					
Maximum Power-Pmax (Wp)	527.2	530.9	534.5	538.0	541.9	545.6
Open Circuit Voltage-Voc (V)	46.52	46.61	46.69	46.78	46.86	46.95
Short Circuit Current-Isc (A)	14.48	14.55	14.61	14.68	14.75	14.81
Maximum Power Voltage-Vmpp (V)	38.93	39.00	39.07	39.14	39.21	39.28
Maximum Power Current-Impp (A)	13.54	13.61	13.68	13.76	13.82	13.89

NMOT: Irradiance at 800 W/m², Ambient Temperature 20° C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	n-type HJT
Cell configuration	132 cells (6 × 11 + 6 × 11)
Module dimensions	2384 × 1303 × 33mm
Weight	37.5kg
Superstrate	High Transmission, AR Coated Heat Strengthened Glass
Substrate	Heat Strengthened Glass
Frame	Anodized Aluminium Alloy, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² , Positive(+)350mm, Negative(-)230mm (Connector Included), or customized length
Connector	Twinsel PV-SY02, IP68


TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	43° C ± 2° C
Temperature Coefficient of Voc	-0.22%/° C
Temperature Coefficient of Isc	0.047%/° C
Temperature Coefficient of Pmax Operational	-0.24%/° C
Temperature Maximum	-40° C ~ +85° C
System Voltage Max Series	1500VDC
	35A
	35A


PACKAGING CONFIGURATION

	40ft(HQ)
Number of modules per container	594
Number of modules per pallet	33
Number of pallets per container	18
Packaging box dimensions (LxWxH) in mm	1320 × 1125 × 2520
Box gross weight[kg]	1289

JST-FCMH-690W-HD
I-V characteristics at different irradiances

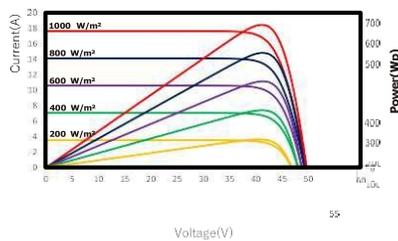

I-V characteristics at different temperatures
(AM1.5, 1000W/m²)

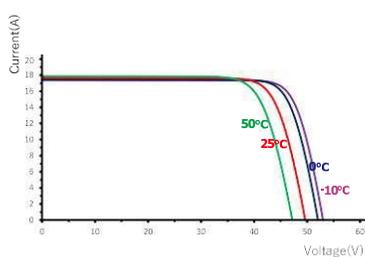

BECSA



In a single hour,
the sun generates
enough energy to
power the lives of
every human on earth
for an entire year.



Thank You.

BECSA

My Power, Every Hour