

GreenWatts Solar Panels

SUPERIOR PERFORMANCE & RELIABILITY


HS66-F-660-MN

HT66-210(PD)-F-660

Solar Panel Monocrystalline
Double Glass Perc Module

HIGHLIGHTS

- Maximum Power Output: 660W
- Maximum Efficiency: 21.2%
- Number of Cells: 132 (6x22)
- Bifaciality: 70 ±5 %

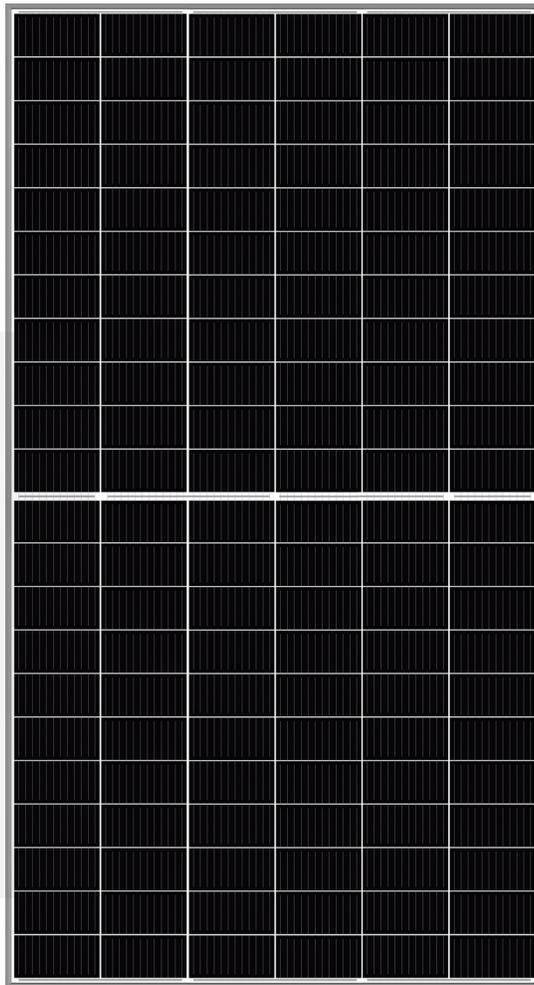

Optimized for High Voltage Systems

- Specifically designed to align with advanced high voltage system requirements.
- Maximum Efficiency up to 21.2%
- Cost effective solutions designed to offer a competitive balance of system cost suitable for utility-scale projects.



Enhanced Efficiency with Half Cut Cell Technology

- Minimizes resistive losses and reduces shading impact, boosting overall efficiency.
- Ensures long term performance against Potential-Induced Degradation.



Durability in Extreme Conditions

- Engineered to endure harsh environmental conditions, such as extreme temperatures, high humidity, salt, mist, and sand.
- Supports up to 5400 Pa for snow loads and 2400 Pa for wind loads, reinforcing module reliability in diverse environmental conditions.

High Reliability



Certification:



ISO 9001
ISO 14001
ISO 45001



UL 61730



IEC 61215
IEC 61730



P: +1 (619) 354-3094
E: sales@greenwatts.solar
W: greenwatts.solar

Los Angeles
9255 Sunset Blvd, Los Angeles, CA 90069

San Diego
1094 Cudahy Place, Suite 212, San Diego, CA 92110

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline 210 x105mm
Number of Cells	132 (6x22)
Dimensions	2384 x 1134 x 35mm 93.86 x 44.65 x 1.38 inches
Weight	38.5 kg 84,878 lb
Front Glass	High transmission coated tempered glass
Back Glass	Heat strengthened glass
Frame	Anodized aluminium alloy
Junction Box	IP68 Rated
Output Cables	4mm ² 0,00620001 in ² (IEC)
Connectors	MC4
Maximum Power in STC (Pmax)	660 W
Maximum Operating Voltage (Vmp)	38.30 V
Maximum Operating Current (Imp)	17.24 A
Open Circuit Voltage (Voc)	45.40 V
Short Circuit Current (Isc)	18.47 A
Module efficiency	21.2%
Operating Temperature of the module	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Power Tolerance	0 ~ +3%
STC	Irradiance 1000W/m ² , Cell Temperature 25°C, Air Mass 1.5

TEMPERATURE CHARACTERISTICS

NMOT	43 ±2 °C 109.4 ±35.6 °F
Temperature Coefficient of PMAX	-0.33% /°C
Temperature Coefficient of VOC	-0.26% /°C
Temperature Coefficient of ISC	+0.042% /°C



PACKING CONFIGURATION

Module per Box	31 Pieces
Module per 40' Container	558 Pieces


ADDITIONAL INFORMATION

Snow and wind loads	Wind - 2400Pa Snow - 5400Pa
IEC Protection Class (I, II, III)	II
Max installation altitude	2000m
Allow roof pitch/angle	Minimum 10 degrees
Max Series Fuse Rating	30A
Fire Rating	Type 1
Front Cover (material / glass thickness)	AR 2.0mm
Back Cover (material / glass thickness)	Normal glass 2.0mm
Bifaciality	70 ±5 %


ENGINEERING DRAWING

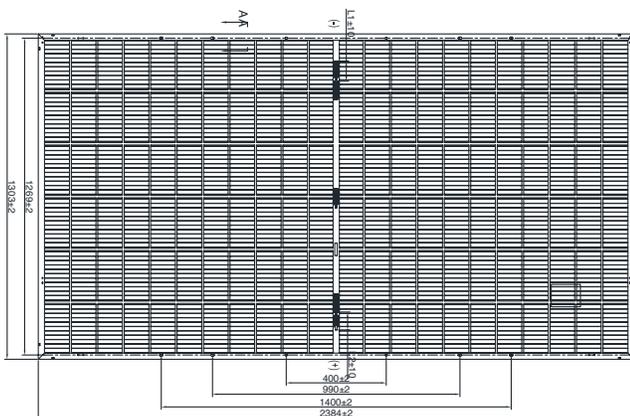

IxV CURVE

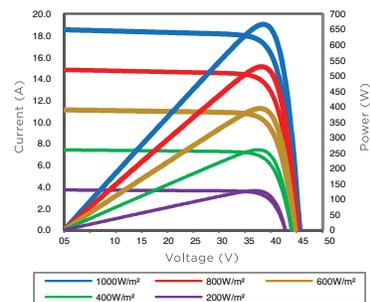

PERFORMANCE WARRANTY

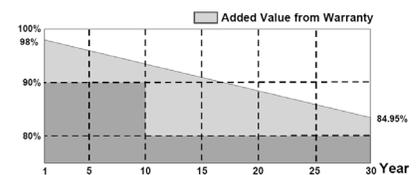

*Specific information is referred to the product quality guarantee



P: +1 (619) 354-3094
E: sales@greenwatts.solar
W: greenwatts.solar

Los Angeles
9255 Sunset Blvd, Los Angeles, CA 90069

San Diego
1094 Cudahy Place, Suite 212, San Diego, CA 92110