






LKS-5M-190-245W

Mechanical data:

Solar cells array:	48 (6X8)
Junction box:	solar junction box, IP68, 3 bypass diode
Output cable :	4.0MM ² ,cable length as standard+mc4 connector
Single glass:	3.2mm tempered glass
Frame:	aluminum frame
Weight:	12.8KG/14KG
Dimension:	1320x 992 x 35mm
Packing:	2Pcs/carton, paper carton
Remarks:	fully customized acceptable

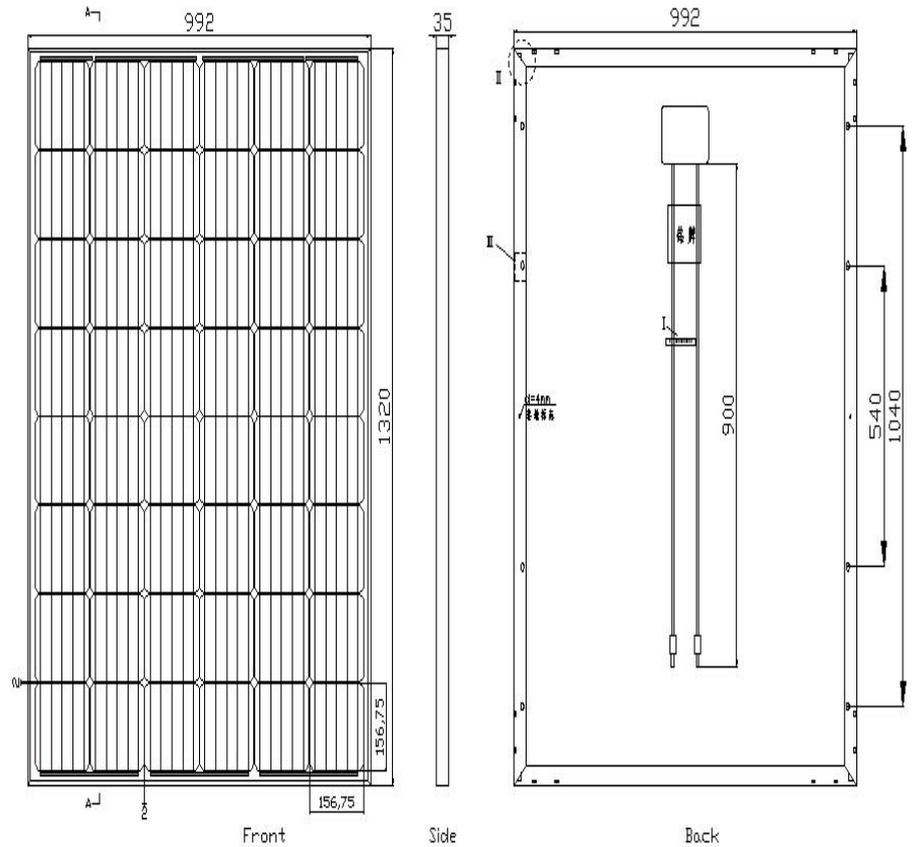

A smart design for the light and portable solar modules, which could be easily used in tiny area, such as yard lighting, room decoration, camping, fishing, sight seeing and so on, where there is need of small quantity power supply, there will be our products could be found. No matter where you are, only with sunlight, you will get power, the endless power.

Electrical data: STC: AM1.5 1000/m² 25C° peak power testing tolerance ±3%

	190	200	210	220	230	240	245
Pmax/W	190	200	210	220	230	240	245
Voc/V	29.4	29.4	29.4	29.4	29.4	29.4	29.4
Isc/A	8.45	8.90	9.35	9.79	10.3	10.7	11.8
Vmp/V	24.3	24.3	24.3	24.3	24.3	24.3	24.3
Imp/A	7.82	8.24	8.65	9.06	9.47	9.88	10.9
Eff. (%)	14.6	15.3	16.1	16.9	17.6	18.4	18.8