


WWW.RESUNSOLAR.COM

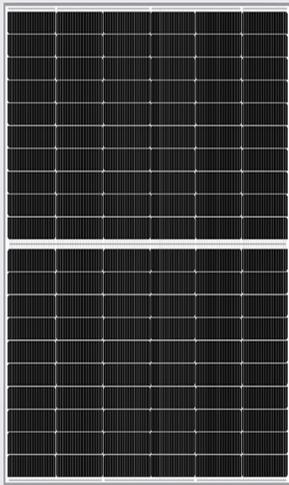


120 Cells
Mono Half-Cell 18BB

615-645W
Power output

22.79%
The Highest Efficiency

± 3%
Isc, Voc, Pmax Tolerance

**0.5% Annual Degradation
over 30 years**

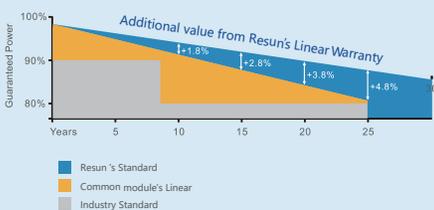

LINEAR PERFORMANCE WARRANTY
15 year Product Warranty / 30 year Linear Power Warranty

RS9KXXXM

RT9KXXXM HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load (2400Pa) and snow load (5400Pa).

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716




RS9K-M




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

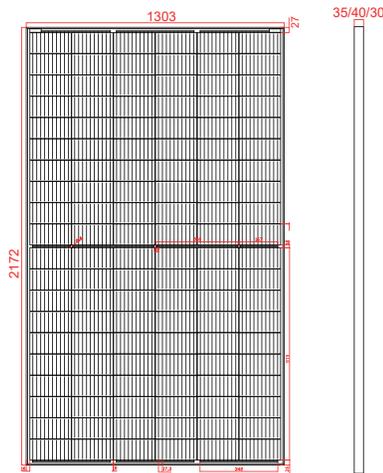


Front

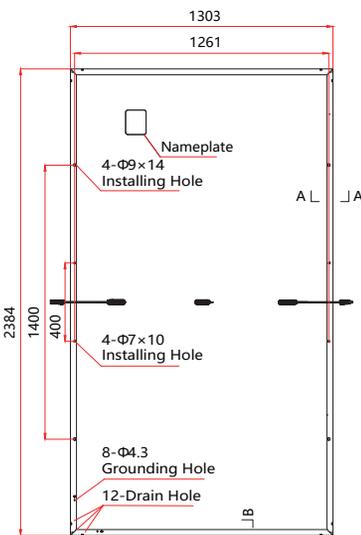


Back

I-V CURVES OF PV MODULE(645W)

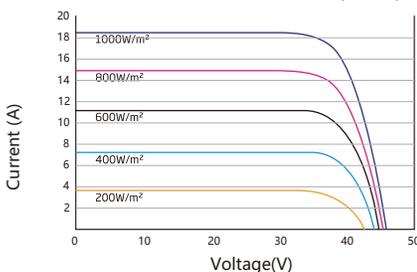

P-V CURVES OF PV MODULE(645W)

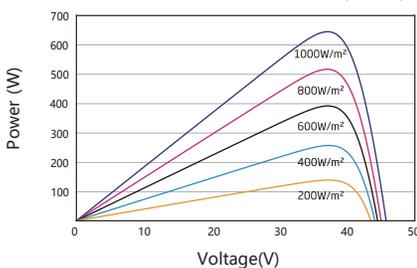

ELECTRICAL DATA(STC)

Photovoltaic module model	RS9K615M	RS9K620M	RS9K625M	RS9K630M	RS9K635M	RS9K640M	RS9K645M
Rated Power in Watts-Pmax(Wp)	615	620	625	630	635	640	645
Open Circuit Voltage-Voc(V)	42.90	43.20	43.50	43.90	44.20	44.50	44.80
Short Circuit Current-Isc(A)	18.15	18.18	18.21	18.24	18.27	18.30	18.33
Maximum Power Voltage-Vmp(V)	36.00	36.20	36.40	36.60	36.80	37.00	37.20
Maximum Power Current-Imp(A)	17.09	17.15	17.18	17.22	17.26	17.30	17.34
Module Efficiency(%)	21.73%	21.91%	22.08%	22.26%	22.44%	22.61%	22.79%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	468	473	478	482	486	490	494
Open Circuit Voltage-Voc (V)	40.70	40.90	41.20	41.60	41.90	42.10	42.40
Short Circuit Current-Isc(A)	14.62	14.65	14.68	14.70	14.73	14.75	14.77
Maximum Power Voltage-Vmp(V)	33.70	34.00	34.30	34.50	34.70	35.00	35.20
Maximum Power Current-Imp(A)	13.89	13.92	13.94	13.93	13.98	14.00	14.03

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 210*105mm, 18 Bus bars
Cell configuration	120cells(6*20)
Module dimensions	2172*1303*35mm/40mm/30mm
Weight	30.9kg/31.4kg/29.4kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP68
Cable	4mm ² (IEC)/12AWG(UL),300mm/400mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	31/27pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION

	40HQ
Number of modules per container	558/486pcs
Package	31/27pcs/pallet
Package Number	18pallets
Package Weight	978/868kg/pallet
Package Dimension	1325*1130*2310mm/pallet

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
 Email: info@resunsolar.com
 Web: www.resunsolar.com

MADE IN CHINA