


WWW.RESUNSOLAR.COM

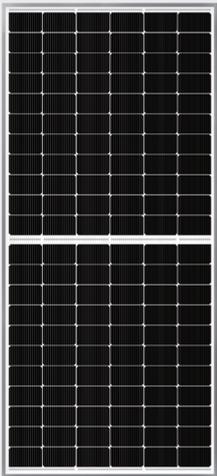

132 Cells

Mono TOPCON 182*105mm, 16 BB

595-630W

Power Output


23.32%

The Highest Efficiency

0~+5W

Tolerance

0.5% Annual Degradation over 30 years

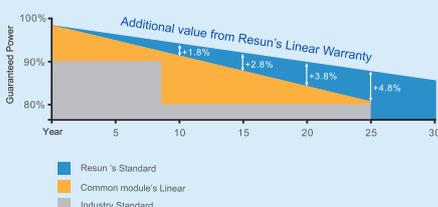

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty

30 Year Linear Power Warranty

RS8H-M TOPCON

RS8H-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spotcrisis caused by shadow effect.



High Reliability

SMBB technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

SMBB technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass,the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716





RS8H-M TOPCON



GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

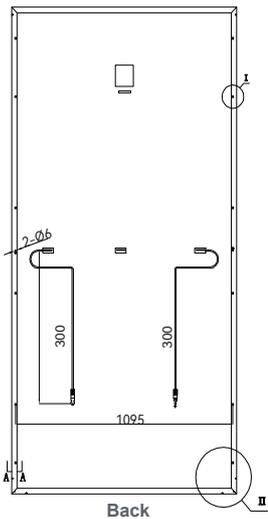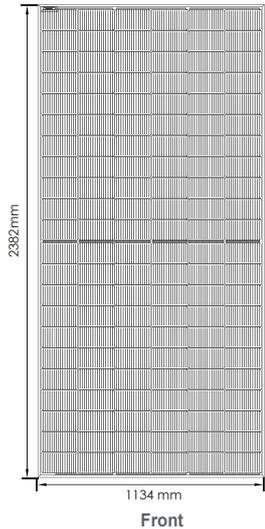

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	610	615	620	625	630
Open Circuit Voltage-Voc(V)	48.70	48.90	49.10	49.30	49.50
Short Circuit Current-Isc(A)	15.83	15.88	15.93	15.98	16.03
Maximum Power Voltage-Vmp(V)	40.78	40.98	41.17	41.37	41.56
Maximum Power Current-Imp(A)	14.96	15.01	15.06	15.11	15.16
Module Efficiency	22.58%	22.77%	22.95%	23.14%	23.32%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	465	469	473	477	481
Open Circuit Voltage-Voc (V)	45.63	45.82	46.01	46.19	46.38
Short Circuit Current-Isc(A)	12.79	12.83	12.87	12.91	12.95
Maximum Power Voltage-Vmp(V)	38.25	38.44	38.62	38.81	38.98
Maximum Power Current-Imp(A)	12.16	12.20	12.25	12.29	12.34

NOCT: irradiancia a 800 W/m², temperatura ambiente 20 °C, velocidad del viento 1 m/s.

MECHANICAL DATA

Solar Cells	Mono-crystalline 182*105mm, 16 Bus bars
Cell Configuration	132 cells(6*22)
Module Dimensions	2382*1134*30mm
Weight	28.3kg
Front Cover	3.2mm Tempered Glass
J-Box	IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL), 300mm+300mm or customized length
Connectors	MC4 or MC4 Compatible
Standard Packaging	37pcs/pallet


TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.29%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	25A
Limiting Reverse Current	25A


PACKAGING CONFIGURATION

	40HQ
Number of modules per container	740 pcs
Package	37 pcs/pallet
Package Number	20 pallets
Package Weight	1091 kg/pallet
Package Dimension	2394*1130*1270 mm/pallet

I-V CURVES OF PV MODULE(610W)

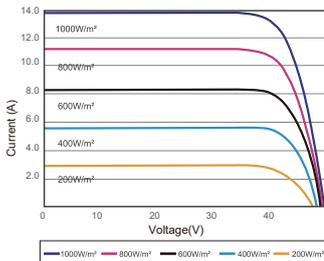

P-V CURVES OF PV MODULE(610W)

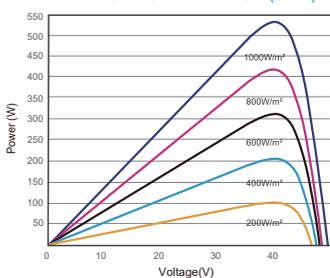

Add: No.99 Zhidong Road, Zhixi Town, Jintan District, Changzhou city.

E-mail: info@resunsolar.com

Web: www.resunsolar.com