



SOLID series

Agro

⚡ 290 W

🇪🇺 Made in the EU

3,2+3,2 mm glass



Fire class A



10 500 Pa
Extreme load resistance



NH₃
Ammonia resistance



40 mm
Hail resistance class 4



98 %
recyclable



35 %
of recycled glass content



30 Product & Efficiency Guarantee
YEAR

90% POWER WARRANTY



THE FIRST AND ONLY IN THE WORLD

Deutsches Institut für Bautechnik



ONE OF A FEW IN THE WORLD

Electrical data (STC*)

Maximum power (W)	290
Cell technology	N type, TOPCon - bifacial
Open circuit voltage (V_{oc}/V)	27,93
Short circuit current (I_{sc}/A)	13,80
Max power voltage (V_{mpp}/V)	21,97
Max power current (I_{mp}/A)	13,20
Module efficiency (n)	14,71 %
Max system voltage (V)	1500
Max current (A)	25
Power tolerance	0/+5W

*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

Warranty


30 years product warranty

30 years efficiency warranty

First year degradation (%) 1

Annual degradation (%) 0,31

Power in year 30 (%) 90

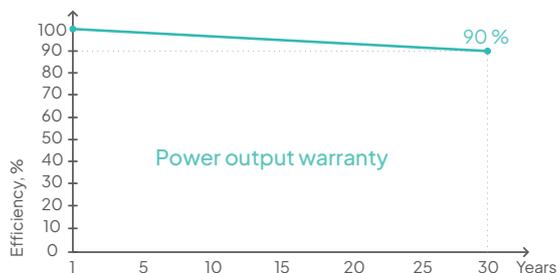

Certifications

IEC 61215:2021; IEC 61730:2023

Cradle to Cradle (C2C)	Gold level
abZ/aBG	National technical approval / General construction technique permit
IEC 62716:2013	Ammonia corrosion testing
IEC 61701:2020	Salt mist corrosion testing
IEC 61215-2:2021	40 mm hailstone - Hail resistance class 4 (HW4)
ISO 9001:2015	Quality management systems
ISO 14001:2015	Environmental management systems
ISO 45001:2018	Occupational health and safety
SundaHus	A level assessment

Produced using 100% renewable energy

Membership at Svensk Solenergi



Product assessed in SundaHus Material Data



PRODUCED USING 100% RENEWABLE ENERGY



Svensk Solenergi




Temperature ratings

Current temperature coefficient (α)	+0,045% / °C
Voltage temperature coefficient (β)	-0,250% / °C
Power temperature coefficient (δ)	-0,300% / °C
Nominal operating module temperature	46 °C

Mechanical data

Dimensions (LxWxH) (mm)	1729x1140x7,2
Dimensions with edge sealing (LxWxH) (mm)	1733±2x1144±2x7,2
Weight (kg)	32
Front glass (mm)	3,2 structured, low reflection, with AR coating, TVG
Back glass (mm)	3,2, transparent, TVG
Cell Size (mm)	182x91,875
Busbars	10
Transparency (%)	35
Cell configuration	4x18
Frame	Frameless
Rated operating altitude (m)	Up to 2000
Operating temperature (°C)	-40 ÷ +85
Maximum test load (wind/snow) (Pa)	5400/10500
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm ²)	4
Cable length (m)	1,2
Bypass diodes	3
Connector	MC4-EVO2

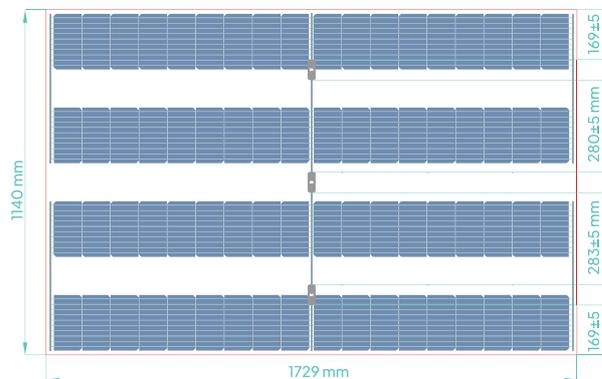

Packing information

Modules per pallet (pcs)	25
Dimensions of a pallet (LxWxH) (mm)	1860x1220x1100
Weight of a pallet (gross) (kg)	887
Pallets per 13,6 m truck (pcs)	22
Modules per 13,6 m truck (pcs)	550

