

BIFACIAL BIPV PERC MONOCRYSTALLINE 80 PMKB12

◆ TT400-80PMKB12 250

High Conversion Efficiency
High panel efficiency to guarantee high power output

Self-Cleaning And Anti-Reflection Glass
Coating glass for self-cleaning reduces surface dust

Outstanding Low Irradiation Glass
Outstanding panel performance even in weak light conditions

Excellent Durability
Wind load up to 2400 Pa, Snow load up to 5400 Pa

0~+5W Positive Power Tolerance


Easy Installation

Twice EVA Laminated Double Glass


According to guideline DIN 18008. For vertical and overhead glazing (DIBt Z-70.3-293 Approval).

Deutsches Institut für Bautechnik **DIBt**

TommaTech GmbH
Allgemeine bauaufsichtliche Zulassung/
Allgemeine Bauartgenehmigung
Nr. Z-70.3-293
Deutsches Institut für Bautechnik

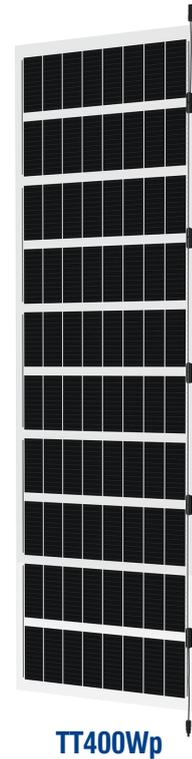

TommaTech's Building Integrated Solar Modules (BIPV) are designed with the latest generation of high efficiency cells, providing a smart and environmentally friendly energy solution that is also aesthetically pleasing. Designed in 4 main sizes, the solar modules are preferred in many areas such as restaurants, cafes, homes, offices, workplaces, hotels, pools, conservatories and terraces of houses. The system is equipped with aluminum infrastructure and provides both thermal insulation and tightness. The system, which can be designed as an off-grid, grid-tied or hybrid solar energy system, is also a real eye-catcher.

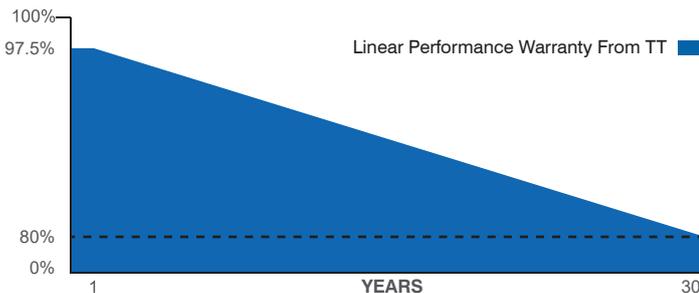

SOMPO

IEC 61215,
IEC 61730-1,
IEC 61730-2

ISO 9001:2015,
ISO 14001:2015,
ISO 45001:2018

✓ 30 Years Performance Warranty

✓ 30 Years Product Warranty

Model Type	80PMKB12-250
Peak Power (Pmax)	400 Wp
Module Efficiency	16.33
Maximum Power Voltage (Vmp)	46.16
Maximum Power Current (Imp)	8.67
Open Circuit Voltage (Voc)	54.16
Short Circuit Current (Isc)	9.11
Cell Dimensions(mm)	80(10x8)
Cells per Module	210x105
Panel Dimensions (mm)	2500x980x7.6
Weight (kg)	48.10
Transparent Area (%)	27
Front / Back Glass Thickness (mm)	3.2 / 4.0
Power Tolerance	0~+5W
Maximum System Voltage	1500V DC
Nominal Operating Cell Temp.	-40 ~ +85°C
Protection Class	Klasse II
Maximum Series Fuse Rating	20A
Max. Wind/Snow Load (Pa)	2400 / 2400
Junction Box	IP68
Junction Box Cable Length(cm)	30


TEMPERATURE CHARACTERISTICS

PHYSICAL CHARACTERISTICS


Temp. Coeff. of Isc	0.041%/°C
Temp. Coeff. of Voc	-0.280%/°C
Temp. Coeff. of Pmax	-0.360%/°C

TT400-80PMKB12 250

PACKING CONFIGURATION

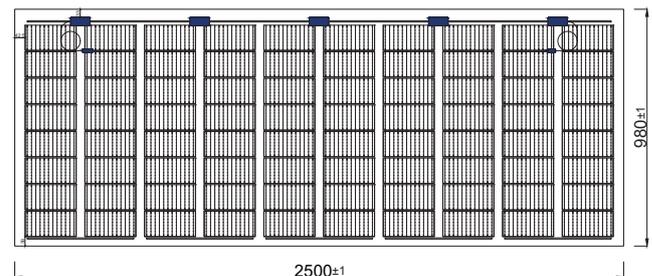

Module Model	80PMKB12
Truck	40' GP
Pieces per Pallet	20
Pieces per Conteyner	400
Pallet per Conteyner	20
Weight of Pallet (kg)	962

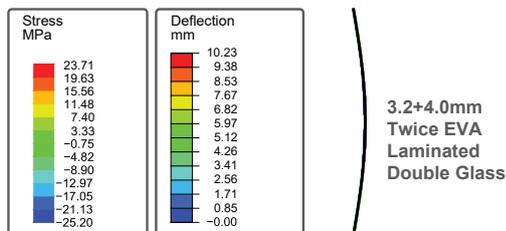

*Simulation Results Under 2400Pa Pressure

* The specifications are obtained under the standard test conditions: 1000W/m2 solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

* TommaTech® GmbH reserves the right to change the specification of products without prior notice.

Ver.2502.04