

25.6V 100Ah LITHIUM BATTERY

EPEVER




► Features

- A grade brand new prismatic LiFePO4 cells
- > 6000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Easy installation and maintenance free
- Cell balance function
- Metal Case, excellent heat dissipation, more safety
- Certificate: UN38.3, MSDS IEC62619
- Max 2 battery packs in series/Max 4 battery packs in parallel


► Electrical Characteristics

Model		LFP2.56KWH25.6V-P65H2
Electrical Parameter	Battery Type	LiFePO4
	Nominal Voltage (V)	25.6
	Nominal Capacity (AH)	100
	Energy (WH)	2560
	Pack Mode	8S1P
	Continuous Discharge Current (A)	75
	Charge Cut-off Voltage (V)	28.8
	Discharge Cut-off Voltage (V)	20.8
	Max.Charge Current (A)	75
	Max.Discharge Current (A)	150
	Peak Discharge Current (A)	180
	Recommend Discharge Current (A)	75
	Recommend Discharge Depth (%)	80
	Cycle Life	> 6000 cycles (25°C, 0.5C) 80% DOD
	Function	---
Communication	RS485 CAN	
Display	LCD	
Mounting	Wall-mounted	
Environmental Parameter	Charge&Discharge Temperature (°C)	Charge: 0°C~+55°C / Discharge: -20°C~+60°C
	Optimal Storage Temperature (°C)	5°C ~ +35°C
	Relative Humidity	40%~80%
	Ingress Protection	IP65
Mechanical Parameter	Terminal	M8
	Dimensions (L*W*H) (mm)	360*180*460
	Weight (Kg)	27.4±0.5
Certificate		UN38.3 MSDS IEC62619


Different Rate Discharge Curve@25°C

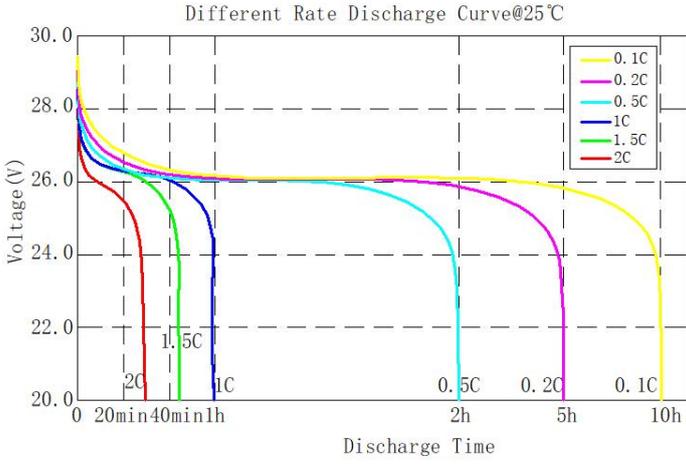


Different Temperature Discharge Curve@0.5C

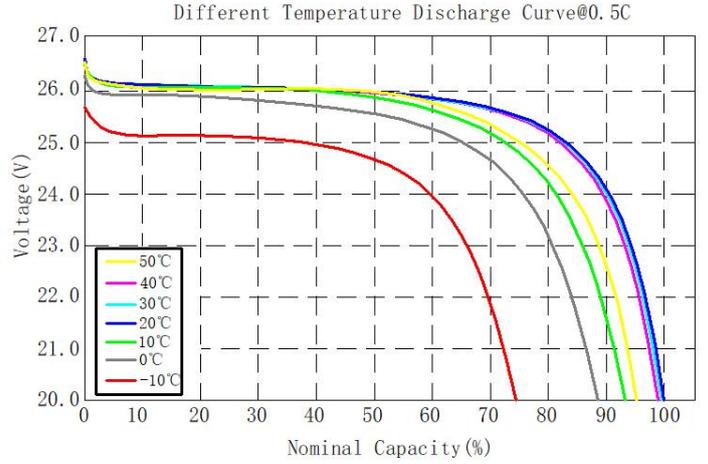


State of Charge Curve@0.5C 25°C

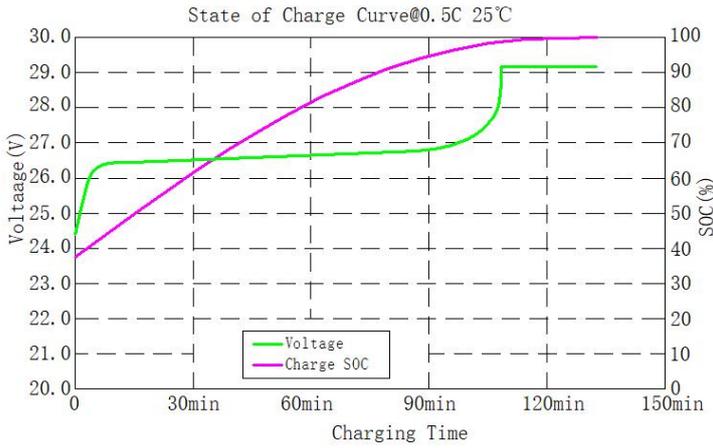

Charging Characteristics@0.5C 25°C

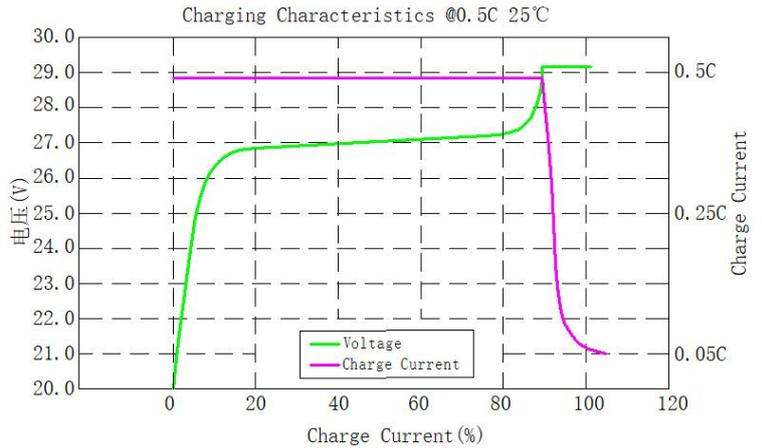

Different DOD Discharge Cycle Life Curve@0.5C 25°C

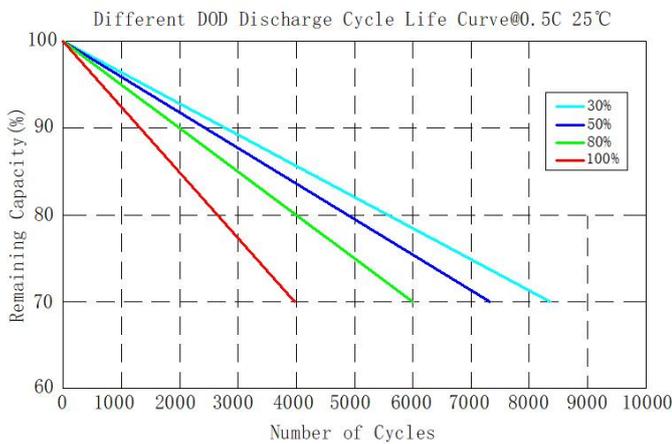

Different Temperature Self Discharge Curve

