

TOPCON MONOCRYSTALLINE 132TN12

- ◆ TT730-132TN12 730 Wp**
- ◆ TT710-132TN12 710 Wp**
- ◆ TT725-132TN12 725 Wp**
- ◆ TT705-132TN12 705 Wp**
- ◆ TT720-132TN12 720 Wp**
- ◆ TT700-132TN12 700 Wp**
- ◆ TT715-132TN12 715 Wp**
- ◆ TT695-132TN12 695 Wp**



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability



Wind load up to 2400 Pa, Snow load up to 5400 Pa



0~+5W Positive Power Tolerance



Easy Installation

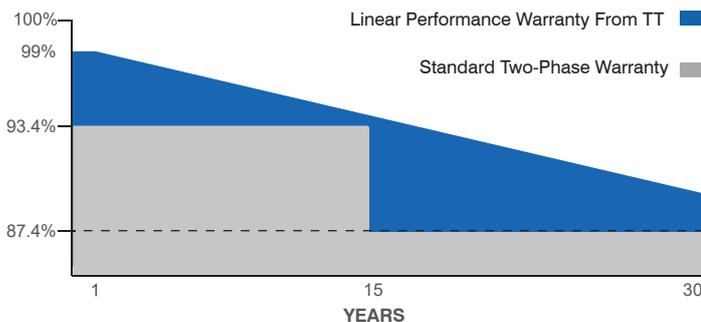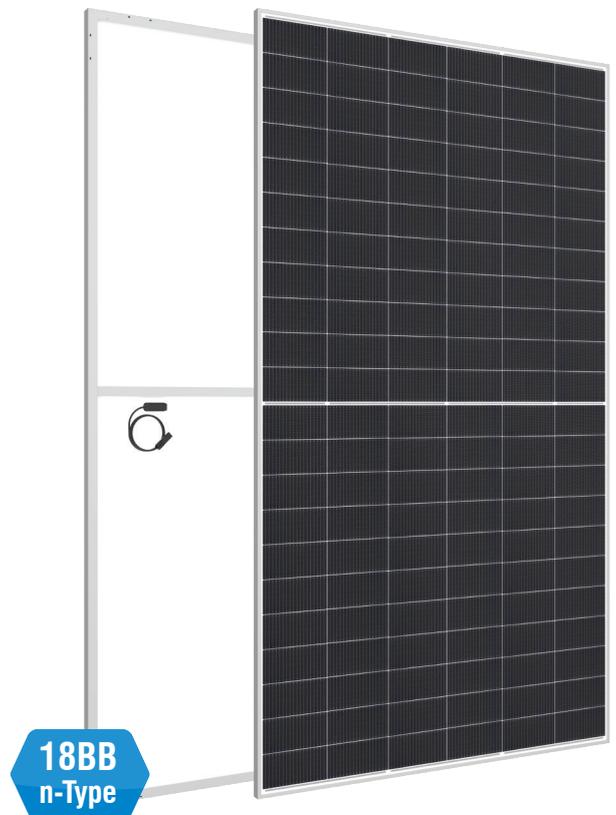

- 30 Years Performance Warranty**
- 15 Years Product Warranty**

Half-Cut



IEC 61215, IEC 61730-1, IEC 61730-2
IEC 62804 PID (POTENTIAL INDUCED DEGRADATION)
IEC 61701 SALT MIST CORROSION
IEC 62716 AMMONIA CORROSION
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018



Model Type	TT695 132TN12	TT700 132TN12	TT705 132TN12	TT710 132TN12	TT715 132TN12	TT720 132TN12	TT725 132TN12	TT730 132TN12
Peak Power (Pmax)	695 Wp	700 Wp	705 Wp	710 Wp	715 Wp	720 Wp	725 Wp	730 Wp
Module Efficiency	22.37	22.53	22.70	22.86	23.02	23.18	23.34	23.50
Maximum Power Voltage (Vmp)	40.10	40.30	40.50	40.70	40.90	41.10	41.30	41.50
Maximum Power Current (Imp)	17.33	17.37	17.41	17.45	17.49	17.52	17.56	17.60
Open Circuit Voltage (Voc)	46.70	46.90	47.10	47.30	47.50	47.70	47.90	48.10
Short Circuit Current (Isc)	18.42	18.47	18.52	18.57	18.62	18.67	18.72	18.76
Power Tolerance	0~+5W							
Maximum System Voltage	1500V DC							
Operating Temperature	-40 ~ +85°C							
Protection Class	Class II							
Maximum Series Fuse Rating	25A							

MECHANICAL SPECIFICATIONS

Cell Dimensions(mm)	210x105
Cells per Module(pcs)	132 (6x22)
Weight(kg)	34.5
Panel Dimensions(mm)	2384x1303x35
Max. Wind/Snow Load(Pa)	2400/5400
Junction Box	IP68
Junction Box Cable Length(mm)	300-1600


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (Isc)	0.040%/°C
Temp. Coeff. of (Voc)	-0.260%/°C
Temp. Coeff. of (Pmax)	-0.320%/°C


PACKING CONFIGURATION

Container	40' GP
Pieces per Pallet	31
Pieces per Container	527
Pallet Per Container	17

PHYSICAL CHARACTERISTICS

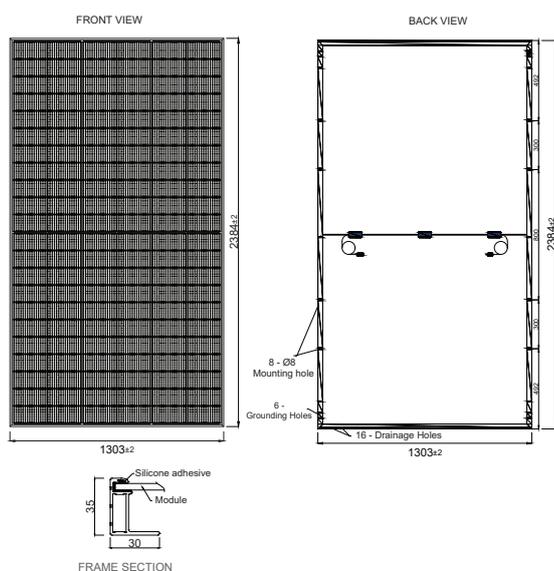

ELECTRICAL CHARACTERISTICS

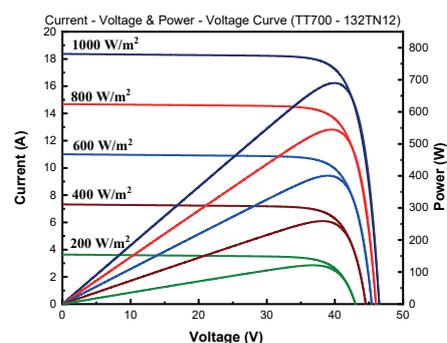

* The specifications are obtained under the standard test conditions: 1000W/m2 solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

* TommaTech® GmbH reserves the right to change the specification of products without prior notice.

Ver.2502.19