



ALPHA TOPCon Module Specification

Monocrystalline 6X22 Solar Modules

182mm Solar Cell

525Wp~555Wp



Zero light-induced degradation



Better low light response



Additional power gain



The highest Mechanical Load Test in PV Industry



Better temperature coefficient



Lower LCOE



The toughest Salt Mist Test in PV Industry

Green Energy

Made in Taiwan



Sustainable Development



ALPHA TOPCon Module Specification(182mm Solar Cell)

Monocrystalline 6X22 Solar Modules

525-555Wp



Electrical Data								
Model Name		TS66-CMH-525 H1	TS66-CMH-530 H1	TS66-CMH-535 H1	TS66-CMH-540 H1	TS66-CMH-545 H1	TS66-CMH-550 H1	TS66-CMH-555 H1
Max. power at STC	P _{max} W	525	530	535	540	545	550	555
Max. power voltage	V _{mp} V	40.25	40.43	40.52	40.64	40.78	40.92	41.04
Max. power current	I _{mp} A	13.05	13.13	13.21	13.29	13.37	13.45	13.53
Open circuit voltage	V _{oc} V	46.78	46.97	47.16	47.35	47.54	47.73	47.92
Short circuit current	I _{sc} A	13.74	13.83	13.92	14.01	14.1	14.19	14.28
Module Conversion Eff.	%	22.1%	22.3%	22.5%	22.8%	23.0%	23.2%	23.4%

* Under Standard Test Condition(1,000W/m²,25°C,AM 1.5): Power Tolerance ±3%
 * Module Conversion Eff. (%) = [Max power at STC(w) / ((Solar Module Area(m²) x 1000 (w/m²))] x 100%
 * Product specifications and data are subject to change without prior notice.


General Data	
Cell type	Monocrystalline TOPCon solar cell
Cell per module	Mono-crystalline silicon TOPCon solar cell (132 pcs)
Front	PV Coated glass
Encapsulant Film	Low water vapor transmission rate (WVTR) material
Rear	Backsheet
Frame	Anti-Salt Mist frame
Junction Box	IP68
Connector	EVO-2 Compatible
Cable	1500mm / 12 AWG / 4mm ²

Temperature Coefficient			
Nominal Operating	NOCT	°C	45±2
Cell Temperature			
TC I _{sc}	α	%/°C	+0.045
TC V _{oc}	β	%/°C	-0.25
TC P _{max}	γ	%/°C	-0.29

Operation Conditions	
Max. system voltage	1500V
Module fire resistance class	Class C
Protection Class (IEC 61140)	Class II
Series fuse rating	25 A
Number of bypass diodes	3
Temperature range	-40 to +85°C
Max. mechanical load	5400 pa


* Please follow installation manual provided by TSEC

Module Dimensions and Weight	
Dimension	2093 x 1134 x 35 mm
Weight	25.5 Kg

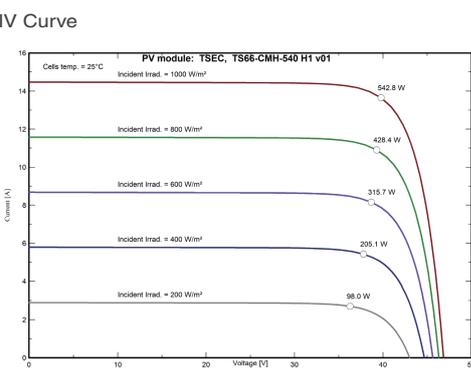


Certifications

- IEC 61215:2021 \ IEC 61730-1:2021 & IEC 61730-2:2021 \ UL 61730
- ISO 9001:2015 Quality management system
- ISO 14001:2015 Environmental management system
- ISO 45001:2018 Occupational health and safety management system

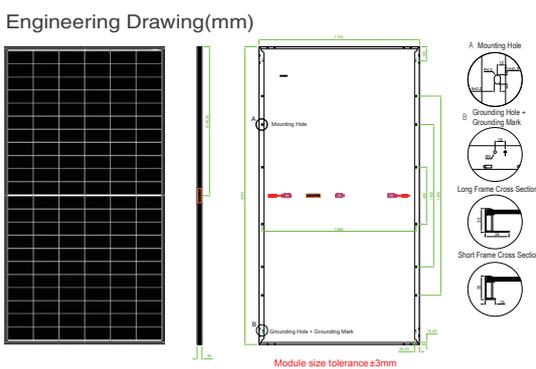

★ Certification is in progress

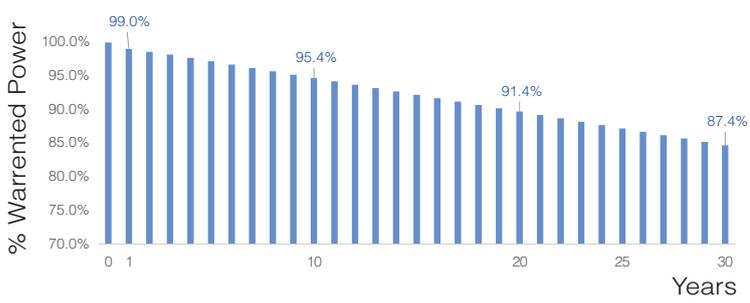

Warranty

- 12-year materials and workmanship warranty
- 30-year linear power warranty

★ The temporary data sheet is still under development.

Made in Taiwan * The information in this document is subject to change without notice * TSEC reserves the rights of final interpretation and revision of datasheet * Version : Rev.11, January 2025