


ISOLANTE 210 W

Premium PV Panel

Solar insulating glass.

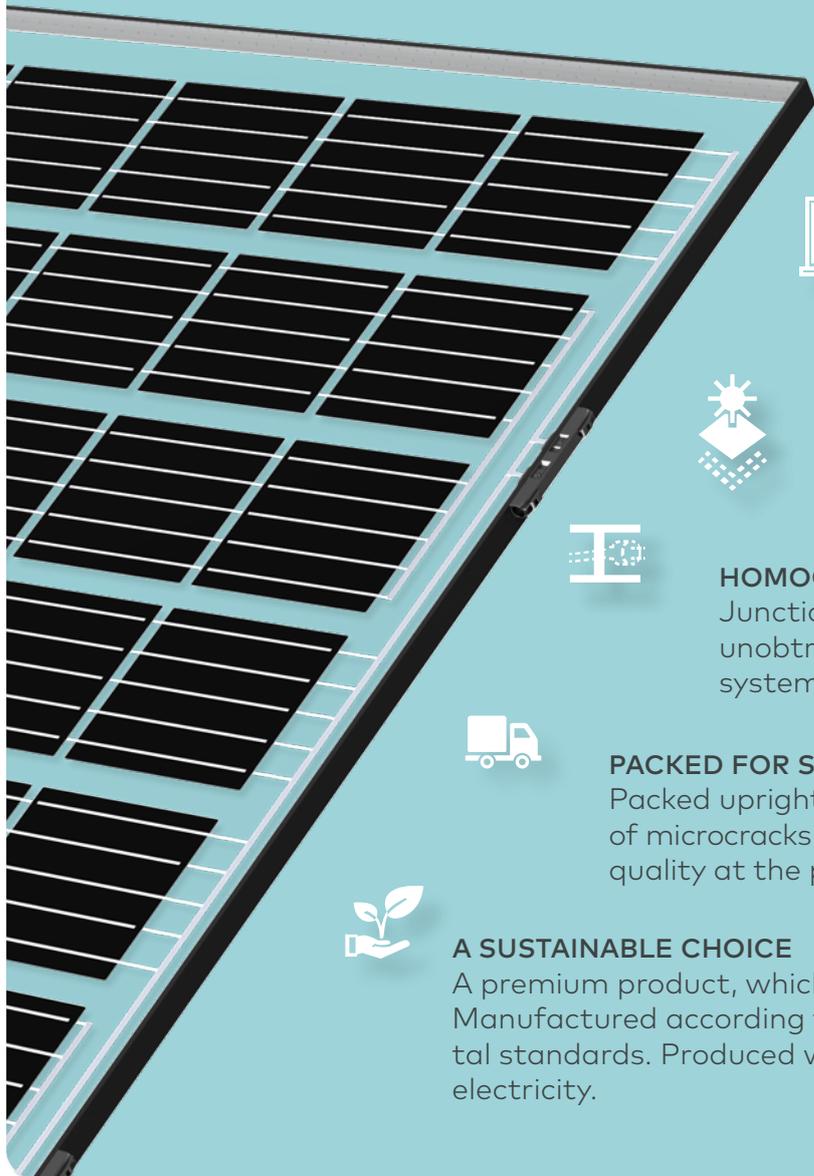

BUILDING PRODUCT

Insulating and thermal glazing for façades and roofing in buildings.



ISOLATION

Double glazing with U-value 1.1 W/(m²K). Triple glazing on request.



TRANSPARENCY ~28%

The perfect balance of light and shadow.



HOMOGENEOUS OPTICS

Junction boxes can be installed unobtrusively in the mounting system.



PACKED FOR SAFE TRANSPORT

Packed upright, avoiding the emergence of microcracks and thus ensuring factory quality at the place of delivery.



A SUSTAINABLE CHOICE

A premium product, which lasts for decades. Manufactured according to rigid environmental standards. Produced with 100% green electricity.

MADE IN GERMANY!

Right here. In Prenzlau. In our production facility. Here we manufacture under the aspects of quality & durability since 2001.

FULL SERENITY



Years linear
Power Guarantee*



Years
Product Guarantee*

100% cost recovery of guarantee claims.

Under the terms and conditions of the respective guarantee certificate.

* The product and performance guarantee applies only to the PV component of the insulating glass.

QUALITY UNDER HAND AND SEAL



aleo
www.aleo-solar.com

aleo solar PV-Insulating glass Isolante 210W

BASIC DATA PV-INSULATING GLASS

Length x width x height	[mm]	1600 x 950 x 33.8
Weight	[kg]	54
Number of cells		40
Cell size	[mm]	158.75 x 158.75
Cell material		Monocrystalline Si, PERC
Front glass		PV module Elegante (4 + 4 mm TSG)
Space in between		Argon gas
Back glass		4 + 4 mm laminated safety glass

BASIC DATA JUNCTION BOX

Length x width x height	[mm]	105.8 x 15.5 x 12.5
IP class		IP67
Cable length	[mm]	820
Connectors		TE Slim Line
Bypass diodes		2 (one per junction box)

TEMPERATURE COEFFICIENTS (PV MODULE)

Temperature coefficient ISC	$\alpha (I_{SC})$	[%/K]	+0.05
Temperature coefficient VOC	$\beta (V_{OC})$	[%/K]	-0.29
Temperature coefficient PMPP	$\gamma (P_{MPP})$	[%/K]	-0.40

ELEKTRISCHE DATEN (STC) (PV-MODUL)

I40D210

Rated power	P_{MPP}	[W]	210
Rated voltage	V_{MPP}	[V]	22.3
Rated current	I_{MPP}	[A]	9.42
Open-circuit voltage	V_{OC}	[V]	27.1
Short-circuit current	I_{SC}	[A]	9.91
Efficiency	η	[%]	13.8

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25°C; AM 1.5

ADDITIONAL ELECTRICAL DATA (PV MODULE)

Reduction of STC efficiency from 1000 W/m ² to 200 W/m ²	[%] rel.	< 2
Classification range	[W]	-/+4.99

Measurement tolerance of P_{MPP} under STC -3/+3% | Accuracy of other electrical values -10/+10% Efficiency relating to gross PV-safety glass area

CERTIFICATIONS AND WARRANTY (PV MODULE)

Product Guarantee*	30 years
Power Guarantee*	30 years
Fire Resistance	Class A
Protection Against Electric Shock	II
Certifications	architectural certification from DIBt


*The product and power guarantee applies solely to the PV component of the insulating glass.

PHOTOMETRIC DATA


U value	[W/(m ² K)]	1.1 (according to standard for thermal insulation glazing)
g-value		0.33**

**The value was calculated with the programme "SommerGlobal" under the boundary condition "summer" for the assessment of comfort and cooling load according to DIN EN ISO 52022-3 point 6.4.6. There is currently no regulation and measurement procedure for determining the g-value for mono-Si PV modules.


PERFORMANCE GUARANTEE

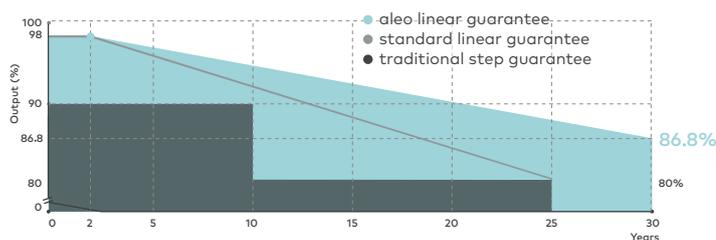

CONSTRUCTION ISOLANTE INCL. DIMENSIONS JUNCTION BOX [MM]

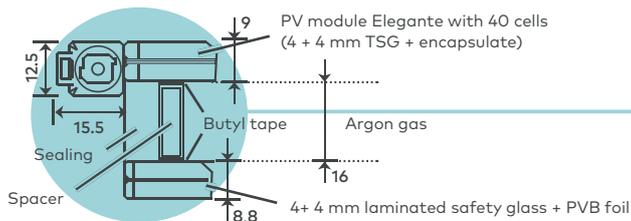

DIMENSIONS [MM]

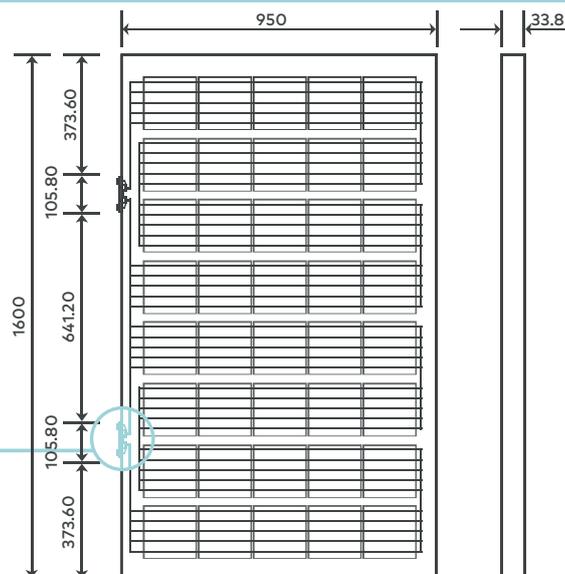

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

ALEO SOLAR GMBH

Marius-Eriksen-Straße 1
17291 PRENZLAU
GERMANY

CONTACT

+49 3984-8328-0
info@aleo-solar.com
www.aleo-solar.com