



AC Power Cable


交流电力电缆

EXPERT IN SOLAR POWER TRANSMISSION

KUKA CABLE products have been sold to more than 120 countries

N2XY/NA2XY Cu(Al)/XLPE/STA/PVC 0.6/1kV

铜(铝)芯交联聚乙烯绝缘电力电缆

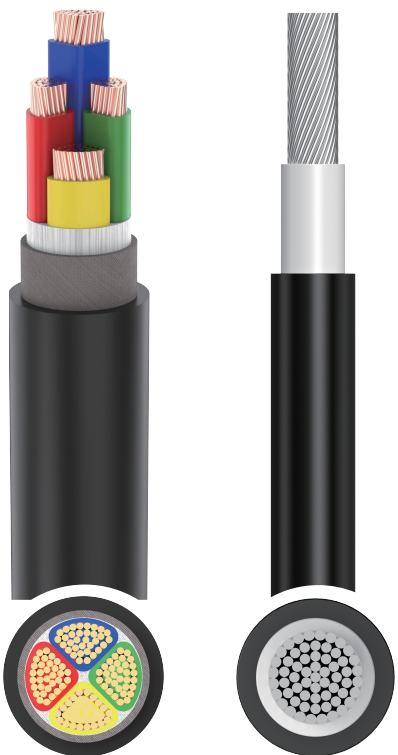

结构 Construction

导体 Conductor	CU/AL, According to IEC60228
绝缘 Insulation	XLPE
护套 Jacket	PVC
绝缘颜色 Insulation Color	1 core: Natural 2 core: Brown, Blue 3 core: Brown, Blue, G/Y 4 core: Brown, Black, Grey, G/Y 5 core: Brown, Black, Grey, Blue, G/Y

技术参数Parameter

电气特性 Electrical characteristics		机械特性 Mechanical feature	
额定电压 Rated Voltage	0.6/1KVAC	弯曲半径 Bending radius	15 x Ø2 for Single core; 12 xØ for Multi core
短路温度 Short circuit temperature	250°C for 5 s	温度范围 Temperature Range	-35 °C ~ +90 °C
绝缘电阻 Insulation resistance	>20MΩ/KM	阻燃性测试 Flame-resistant test	EN 60332-1-2
测试电压 Test Voltage	4kv	抗UV测试 UV resistance Test	EN50289-4-17
标准 Standard	IEC60502-1		