
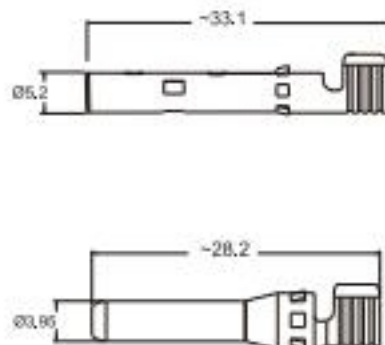


Solar Connector 1500V

光伏连接器 1500V

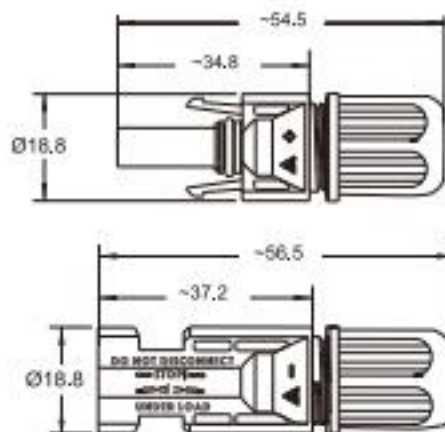

技术参数Parameter

额定电压 Rated Voltage	1500DC	温度范围 Temp. Range	-40 °C ~ +90 °C
额定电流 Rated Current	30A (4.0mm ² , 6.0mm ²)	污染程度 Pollution Degree	CAT II/2
触电材料 Contact material	Tin-plated Copper	防水保护等级 Protection Degree	IP68
接触电阻 Contact resistance	≤ 0.5mΩ	阻燃等级 Flame class	UL-94-V0
绝缘材料 Insulation material	PPO	接触系统 Contact system	Stamped
锁定系统 Locking system	Snap-in	电缆外径范围 Cable OD range	Ø4.5 mm - 7.8 mm
标准 Standard	IEC 62852		