Elink Technology

AT A Series

Original Patent design
Multi-protection from self developed BMS
Brand new battery for 6000 times cycle life

Elink Technology

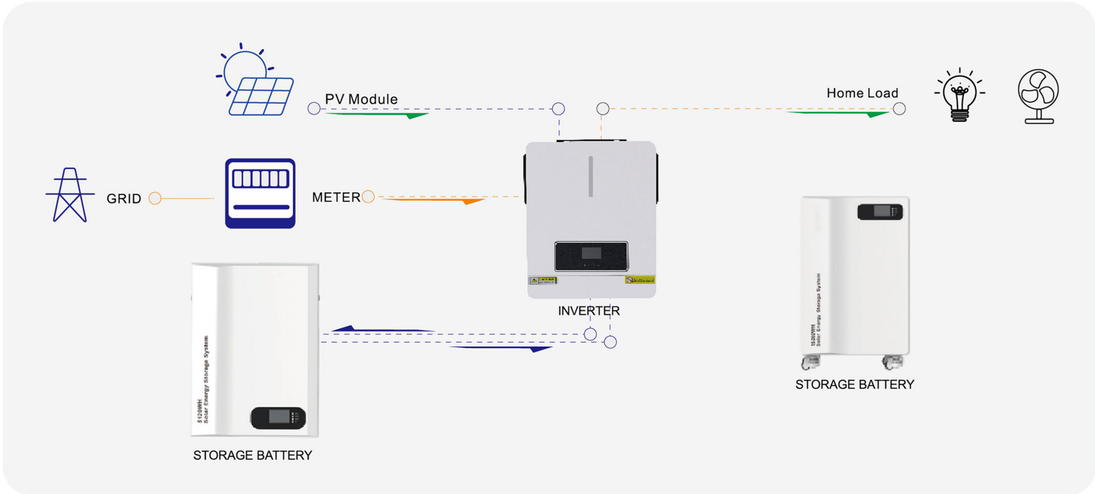

Battery

Model	ELKJNSCAEA51100	ELKJNSCAEA51200
Rated Capacity	5120Wh(100Ah)	10240Wh(200Ah)
Nominal Voltage	51.2V	
Discharge Voltage Range	43.2V-58.4V	
Standard Charing Current	50A	
Max Charging Current	100A	
Max Discharging Current	100A	
Depth of Discharge	90%	
Communication Interface	CAN/RS485	
Cycle Life	≥6000，25±2℃，0.5C，EOL80%	
Working Temperature Range	Charge：0℃-50℃；Discharge：-10℃-60℃	
Storage Temperature	-20℃-60℃	
Dimension	40.5*18.5*58cm	43.5*28*63cm

www.arraypv.com
Info@elinktechnic.com
alvin@elinktechnic.com