


Widely Application / Faster Installation  
Rust Resistance / Customizable / UL Tested / CE Certified




Widely Application Easy Installation Rust Resistance Customizable UL Tested CE Certified

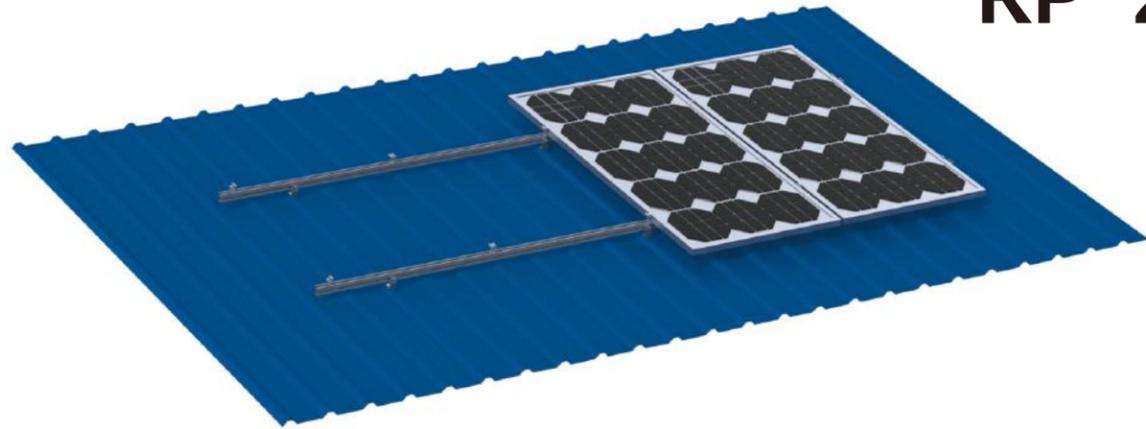

## RP-2

## LF-S80

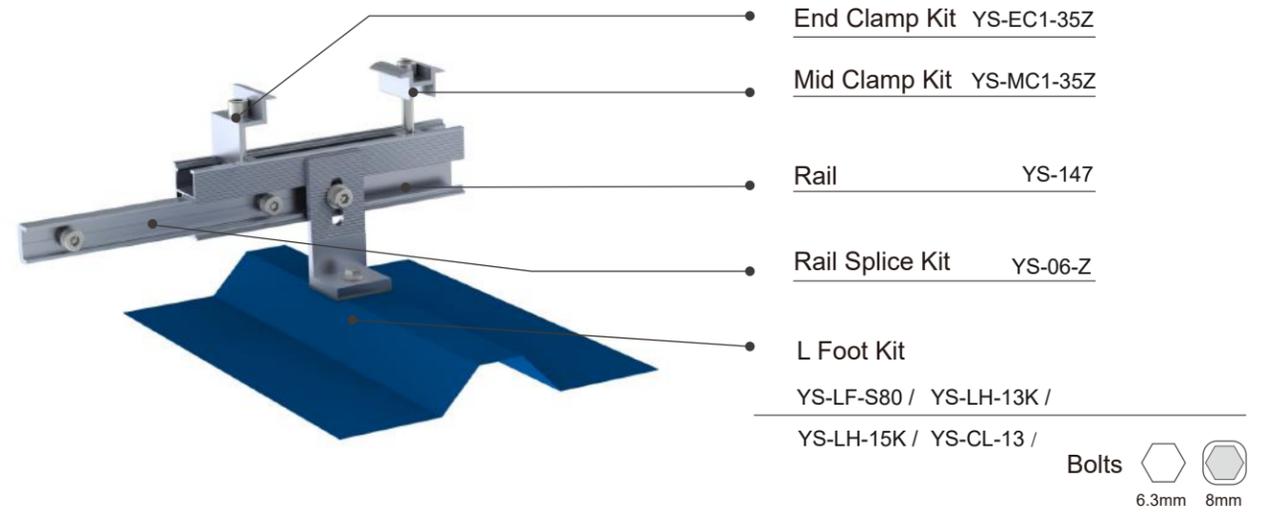


### TECHNICAL DATA

Metal Roof System RP-2	
<b>Application</b> Metal / Corrugated Roof	<b>Fastening Type</b> a. Self-Taping Screw 6.3x25mm b. Self-Taping Screw 6.3x80mm c. Hanger Bolt M10x200 / 250 / 300mm
<b>Module Frame Height</b> 25-50mm	<b>Module Orientation</b> Portrait, Landscape
<b>Requirements</b>	Sheet thickness: ≥ 0.4mm steel or ≥ 0.5mm aluminium Trapezoidal sheet crest width: ≥ 20mm Corrugated sheet radiuses: 22-45mm
<b>Material</b>	Aluminium EN AW-6005 T5 With 12-15um Anodization For Anti-Corrosion SUS410 Tapping Screw SUS304 Hanger Bolt
<b>Standard</b>	Japan JIS C 8955:2011 ASCE 7-10 Malaysian Standard 1553-2002 BS EN 1991-1-4-2005



Application:



Metal Roof



Corrugated Roof

### GROUNDING PARTS

Grounding Lug

YS-GL-Z : For electricity conductive.




Grounding Washer

YS-GW-04: Pierce anodization coating through its teeth for electricity conductive.




## Various Solutions

(1) Wooden Purlin

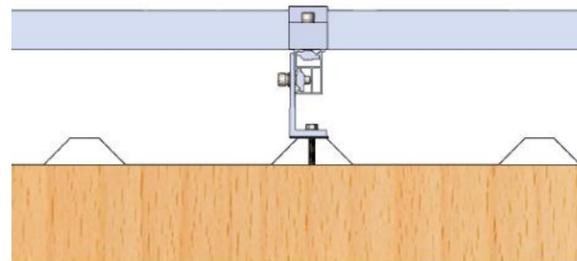


L Foot + Wooden Screw 6.3x80mm / 8x80mm


(2) Steel Beam

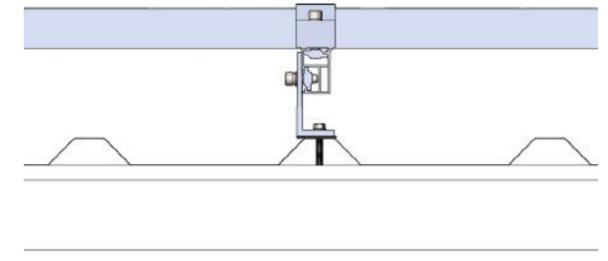

L Foot + Self Tapping Screw 6.3x80mm

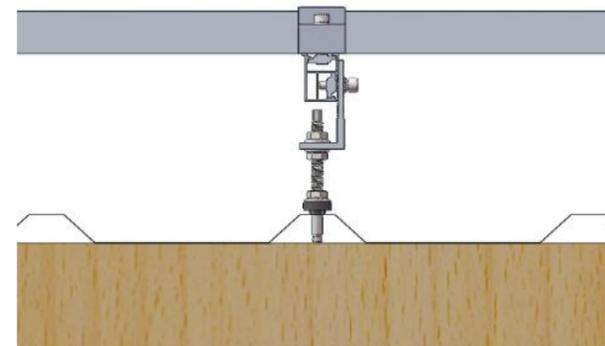

L Foot + Hanger Bolt M10x200mm / 250mm / 300mm  
M12x200mm / 250mm

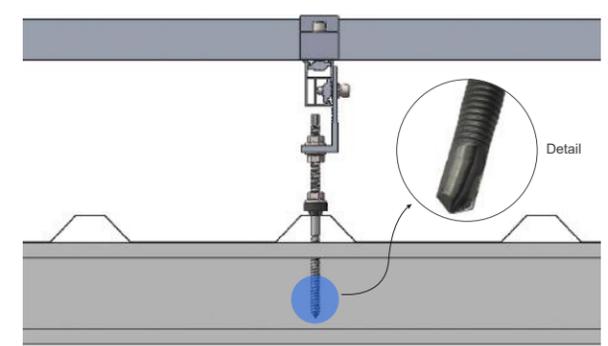

L Foot + Alloy Steel Hanger Bolt With Tapping Head  
M10x200mm / 250mm / 300mm