Elink Technology

Rack mounted

Super Cost-effective
Multi-protection from self developed BMS
Brand new battery for 6000 times cycle life

Elink Technology

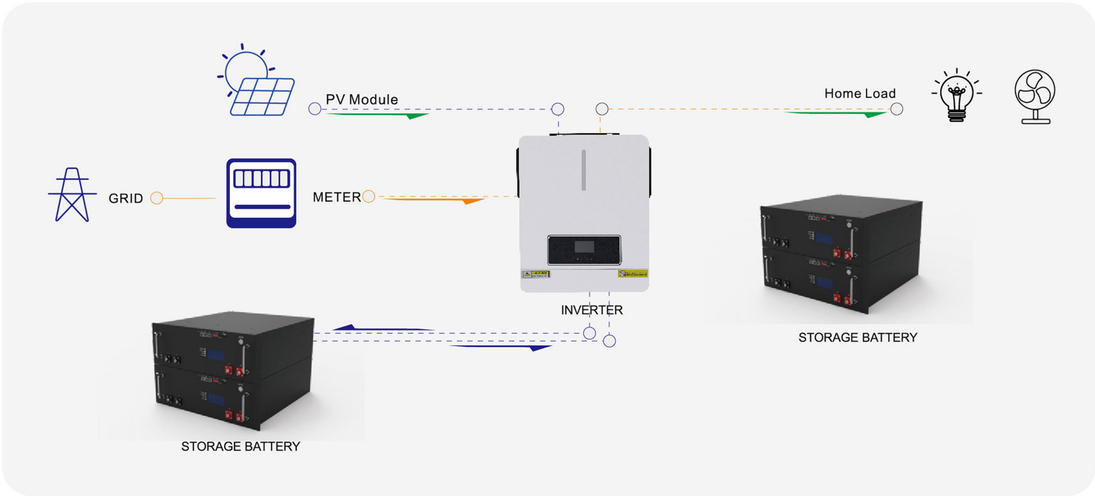

Battery

Model	ELKJNSCRAR51100	ELKJNSCRAR51200
Rated Capacity	5120Wh（100Ah）	10240Wh（200Ah）
Nominal Voltage	51.2V	
Discharge Voltage Range	43.2V-58.4V	
Standard Charging Current	50A	
Max Charging Current	100A	
Max Discharging Current	100A	
Depth of Discharge	90%	
Communication Interface	CAN/RS485	
Cycle Life	≥6000，25±2℃，0.5C，EOL80%	
Working Temperature Range	Charge：0℃-50℃；Discharge：-10℃-60℃	
Storage Temperature	-20℃-60℃	
Dimension	49.2*45*18cm	56*48*22.5cm

www.arraypv.com
Info@elinktechnic.com
alvin@elinktechnic.com