


SEAM CLAMP SYSTEM



Unlock the potential of your seam roof with our Universal KlipLok Clamp – an ideal solution crafted for the most common roofs in India. Specifically designed for KlipLok 700 and 400 series, our non-penetrative seam clamp system ensures a sturdy hold and strong pullout capacity. Embrace solar energy confidently with our trusted and versatile solution.

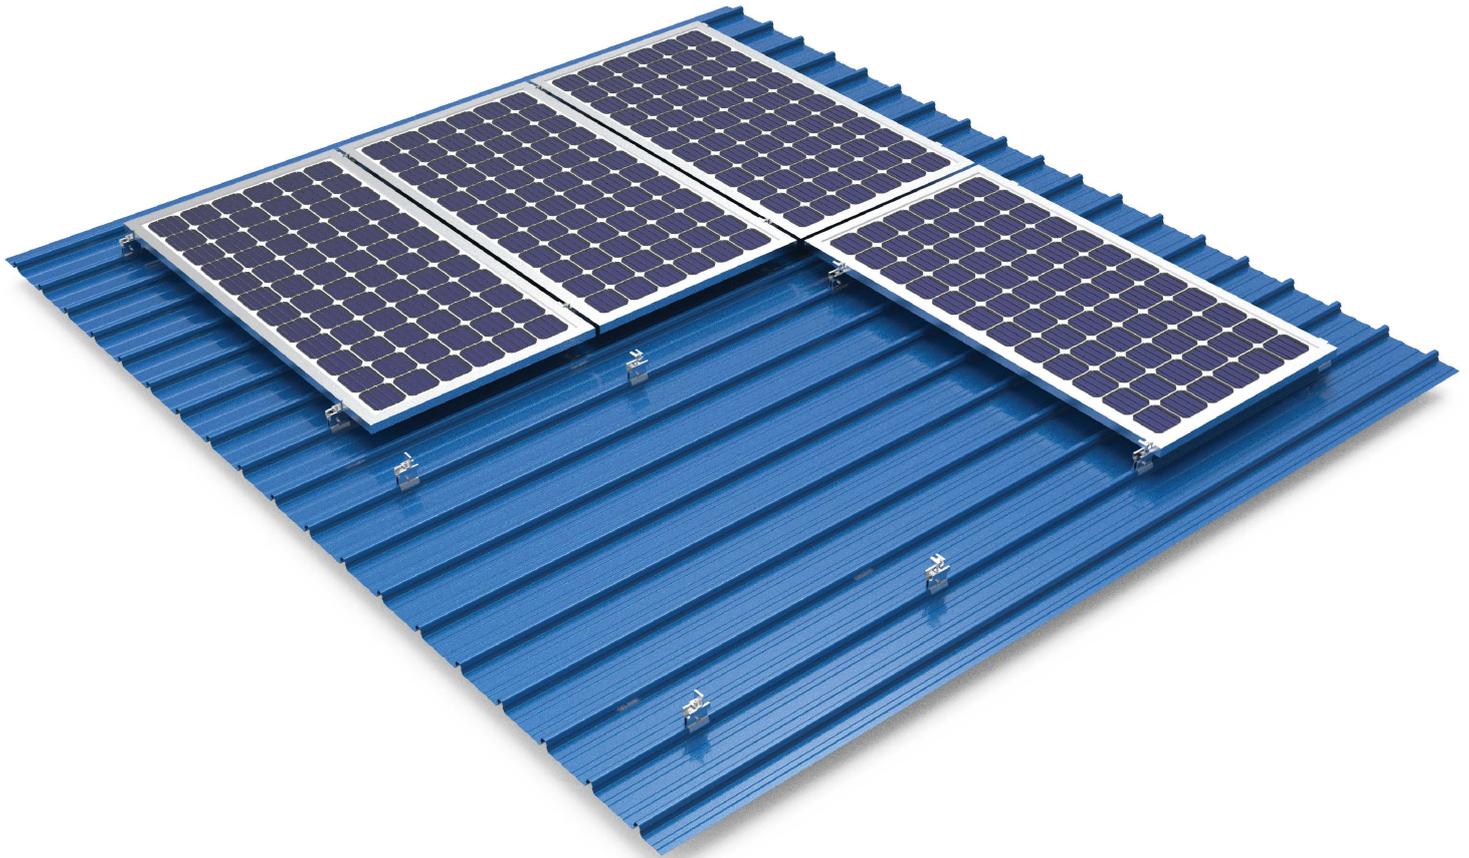


Highlights

- Universal clamp for KlipLok 700 & 400 series
- No swarf generation, minimal sheet damage
- Optimum centric load distribution
- Fewer components - quick & easy installation
- Efficient space utilization
- Compatible with all PV module.

General Guidelines:

- Recommended roof pitch: $\leq 20^\circ$
- Ensure min. 50mm rail-end & module spacing
- Thermal separation after 10 m recommended
- Designed wind speed limit - 120kmph



Mounting Pos 1

Mounting Pos 2

Clamp Dimensions:

Height: 90 mm
Length: 80 mm

Raw Material Used:

Aluminium 6063 T6
SS 304

Available in Anodized/Non-Anodized finishes