

High Efficiency PV Modules / Solar Panels

MonoCrystalline Solar Panel, 150 Watts

FEATURES

- ◆ High module efficiency through superior manufacturing technology.
- ◆ No power loss thanks to improved temperature coefficient caused by 3 busbar solar cell.
- ◆ Strictly control the micro-crack of solar cells and the other non visible defect of internal modules.
- ◆ Module can bear snow loads up to 5400Pa and wind loads up to 2400Pa.
- ◆ Manufactured according to and certified international I Quality and Environment Management System.
- ◆ Using advanced low reflection and high light transmission glass and cell sheet surface cutting technology, in the weak light environment can also play a good performance.
- ◆ 10 years product warranty.
25 years power warranty.

APPLICATIONS


- ◆ Secondary Home Power System / Remote Power Electrical Power Back-Up System
- ◆ On-Grid Commercial / Industrial Rooftops
- ◆ Off-Grid Power System
- ◆ Marine & Boating
- ◆ Recreational vehicle or Motor Homes / Cabins
- ◆ Battery Charging
- ◆ Pumps / Pool Heating
- ◆ Beacons / Satellite Dishes



SLR-PNL-150W-101M

Maximum Power at STC(Pmax)	150W
Optimum Operating Voltage (Vmp)	17.86V
Optimum Operating Current (Imp)	8.399A
Open-Circuit Voltage (Voc)	22.38V
Short-Circuit Current (Isc)	8.937A
Solar Cell Efficiency (%)	17.44
Solar Module Efficiency (%)	15.06
Operating Temperature	-40to85°C
Maximum System Voltage	DC1000
Maximum Series Fuse Rating	15A
Power Tolerance	0~+3%

STC:Irradiance 1000W/m², Modules Temperature 25°C, AM=1.5

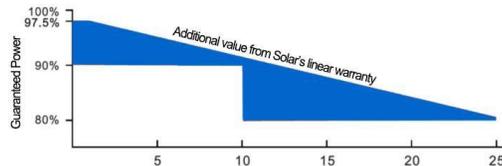

Factory: Shaan Technologies private Limited,
Plot No 22, Sector C3, Export Processing Zone
Karachi, Pakistan

Phone: +92-21-35080954 Fax: +92-21-35080957
City Sales office : Shaantech Energy Solutions (Pvt) Limited
47/H-1, Block 6, P.E.C.H.S., Karachi.
E-mail: info@shaantech.com, Sales-admin@shaantech.net
Website: www.shaantech.com

To order ShaanTech Solar products, Please Call our Sales office
or contact the Distributor /Sales Representative in your area.


Visit our website to find your local Distributor or Representative
from our Nationwide network:

www.shaantechsolar.com


Temperature Coefficient and Mechanical Characteristics

Nominal Operating Cell Temperature (NOCT)	47°C+/-2°C
Temperature Coefficient of Pmax	-0.47%/°C
Temperature Coefficient of VOC	-0.346%/°C
Temperature Coefficient of ISC	+0.036%/°C
Solar cell	Mono156*156mm
No. of cells	36 (4*9)
Dimensions	1480mm*673mm*30mm
Weight	11kg
Front glass	3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction box	PV--YH0906/PV-JB002
Connector	Plug and socket
Output cables	PV 4.0mm ² , 0.9m
1*20'	490pcs
1*40'	1050pcs
1*40'HQ	1260pcs

IV-Curves

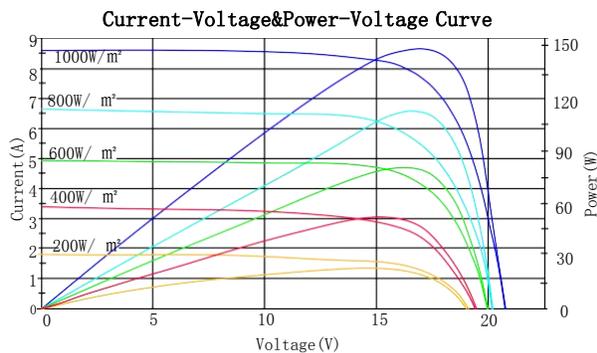

Engineering Drawings

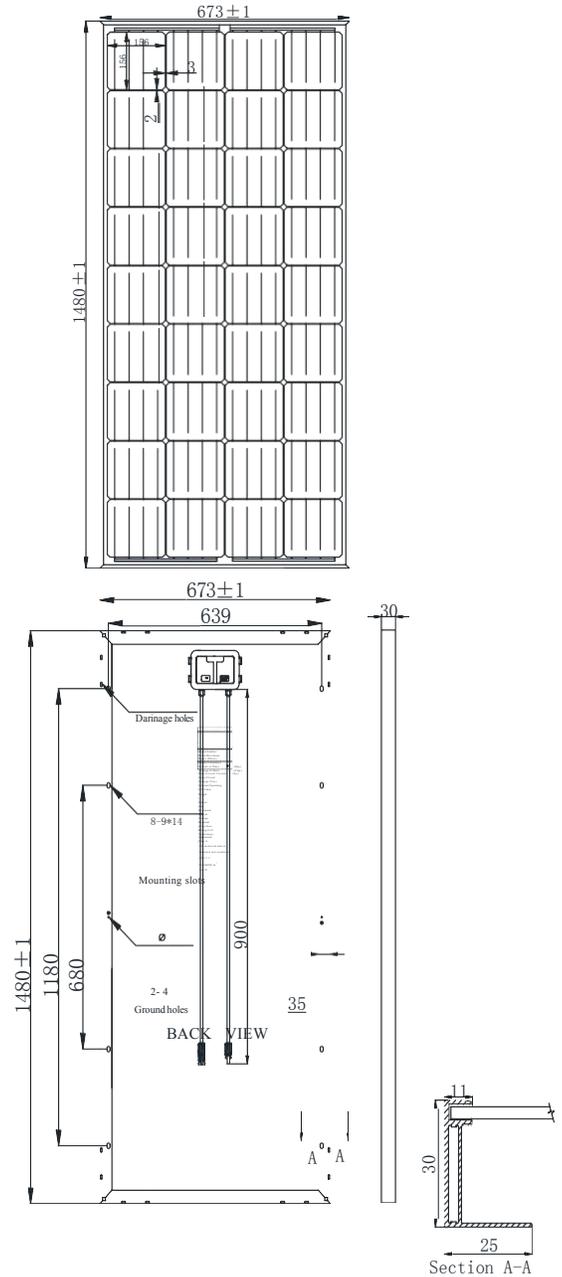

Factory: Shaan Technologies private Limited,
Plot No 22, Sector C3, Export Processing Zone
Karachi, Pakistan

Phone: +92-21-35080954 Fax: +92-21-35080957

City Sales office : Shaantech Energy Solutions (Pvt) Limited

47/H-1, Block 6, P.E.C.H.S., Karachi.

E-mail: info@shaantech.com, Sales-admin@shaantech.net

Website: www.shaantech.com

To order ShaanTech Solar products, Please Call our Sales office
or contact the Distributor/Sales Representative in your area.

Visit our website to find your local Distributor or Representative
from our Nationwide network:

www.shaantechsolar.com