


Module	FS-M60-335~320W double sides and double glass			
Pmax	335W	330W	325W	320W
Size and number of cells	156*156.75mm, 60pcs/6*10			
Tolerance	0~+5%			
Vmp	32.40V	32.20V	32.10V	31.90V
Imp	10.34A	10.25A	10.14A	10.04A
Voc	39.40V	39.20V	39.00V	38.80V
Isc	10.90A	10.81A	10.72A	10.63A
Max.Syst.Oper.Voltage	1500V			
Glass	2.5mm high permeability, anti-reflective coating tempering glass			
Dimension	1658*992*6mm			
Weight	23kgs			
Operate Temp. Scope	-40/+85℃			
Warranty	10-year product warranty, 30-year linear power guarantee			
STC	Irradiance 1000 W/m ² , module temperature 25℃, AM=1.5			



Module	FS-M-425~455W double sides and half-cell						
Pmax	425W	430W	435W	440W	445W	450W	455W
Size and number of cells	166*83mm, 144pcs/6*24						
Tolerance	0~+5%						
Vmp(V)	40.40	40.60	40.80	41.00	41.20	41.40	41.60
Imp(A)	10.52	10.60	10.66	10.73	10.80	10.87	10.93
Voc(V)	48.70	48.90	49.10	49.20	49.40	49.60	49.80
Isc(A)	11.22	11.30	11.36	11.45	11.52	11.58	11.65
Max.Syst.Oper.Voltage	1500V						
Glass	2.5mm high permeability, anti-reflective coating tempering glass						
Dimension	2094*1038*35mm						
Weight	27.5kgs						
Operate Temp. Scope	-40/+85℃						
Warranty	10-year product warranty, 30-year linear power guarantee						
STC	Irradiance 1000 W/m ² , module temperature 25℃, AM=1.5						

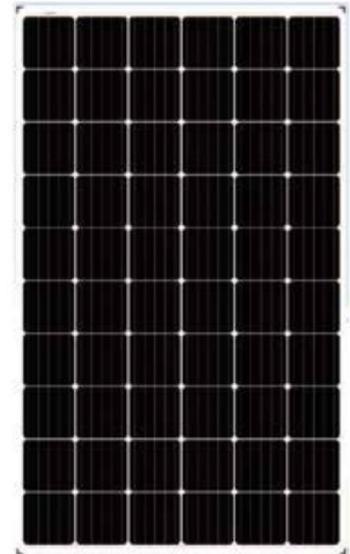