


560-585 Watt N-Type MONO-BIFACIAL MODULE



- ◆ IEC 61215: 2021
- ◆ IEC 61730: 2016
- ◆ TÜV Rheinland Standard
- ◆ CE: European Certification
- ◆ Resistance to salt mist and ammonia corrosion
- ◆ Performance tests under extreme conditions
- ◆ Wind and snow load testing

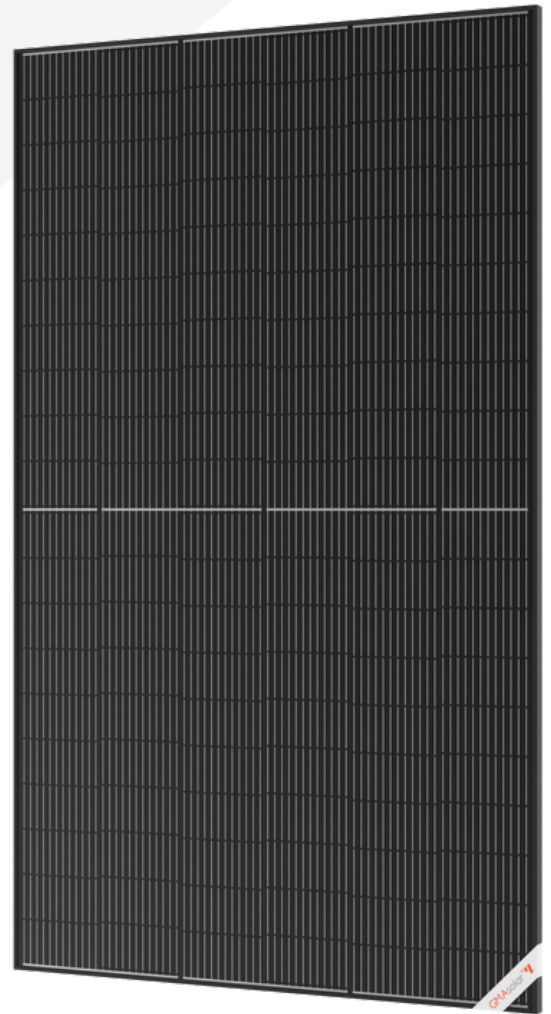

◆ Key Features



Higher Energy Efficiency

N-Type Mono-Bifacial technology harnesses reflected light.



High Climate Resilience

Wind load resistance of 2400Pa and snow load resistance of 5400Pa.



Improved Performance in Low Light

Optimal operation in low irradiation conditions.



Longer Lifespan

25-year warranty with over 85% power output.



PID Protection

Minimized power loss due to degradation effects.



Easy Installation & Compatibility

Lightweight design for easier handling and installation.

560-585 Watt N-Type MONO-BIFACIAL MODULE

> Electrical Parameters at STC

Maximum Power (Pmax)	560 Wp	565 Wp	570 Wp	575 Wp	580 Wp	585 Wp
Voltage at Maximum Power (Vmpp)	34.60 V	34.76 V	34.87 V	35.04 V	35.26 V	35.48 V
Current at Maximum Power (Impp)	16.19 A	16.25 A	16.35 A	16.41 A	16.45 A	16.49 A
Open Circuit Voltage (Voc)	40.21 V	40.32 V	40.43 V	40.54 V	40.70 V	41.20 V
Short Circuit Current (Isc)	17.48 A	17.55 A	17.65 A	17.73 A	17.77 A	17.81 A
Module Efficiency	21.43 %	21.62 %	21.82 %	22.01 %	22.20 %	22.39 %

Values at standard test conditions STC (Air mass AM 1.5, Irradiance 1000W/sqm, Cell temperature 25°C)
Power Measurement Tolerance: 0 / +3%

> Specifications

Weight	29.5 kg
Dimension	2384mm*1096mm*35mm
Cell Dimension	210*105mm
Cell Amount	55*2 pcs
Junction Box	IP68
Type of the front glass	2.0 mm coated ultra clear glass
Type of the back glass	2.0 mm heat - strengthened glass
Frame	Aluminum Alloy
Cable	4mm ² , +300, -300mm/±1300mm Length can be customized
Connector	MC4 compatible
Application Level	Class A


> Maximum Ratings

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V
Wind Load/ Snow Load	2400pa/5400pa
Fuse Current	30 A

> Warranty & certifications

Warranty	25 years Power Output Warranty 10 years 90%, 25 years 85% 10 years Product Warranty on Material
Certification	IEC 61215:2021 IEC 61730:2016

> Mechanical Drawing

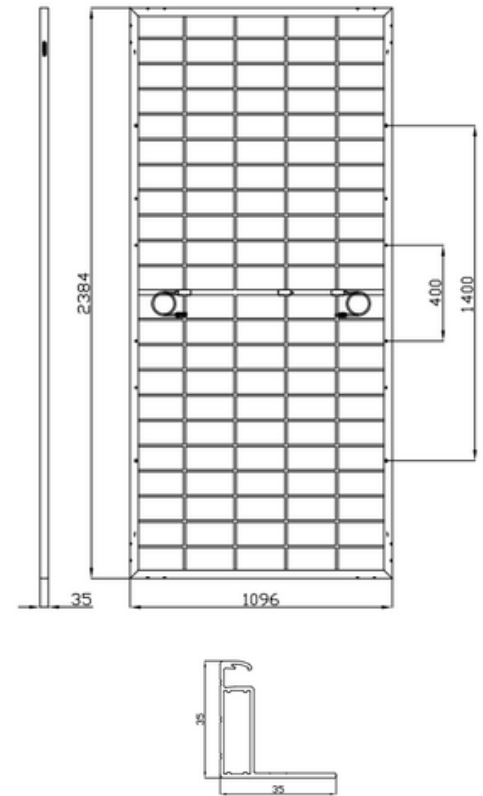

> IV Characteristics

