




Cycle Life Curve

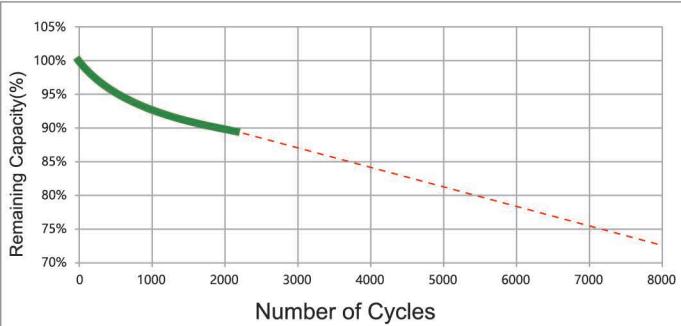

Technical Features

- Longer Cycle Life**: Offers up to 20 times longer cycle life and five times longer float / calendar life than lead acid battery , helping to minimize replacement cost and reduce total cost of ownership.
- Lighter Weight**: About 40% of the weight of a comparable lead acid battery . A 'drop in' replacement for lead acid batteries.
- Higher Power**: Delivers twice power of lead acid battery , even high discharge rate , while maintaining high energy capacity.
- Wider Temperature Range** : -20°C-60°C.
- Superior Safety** : Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact , overcharging or short circuit situation.

Application

- Electric vehicles, electric mobility
- Solar Wind energy storage system
- UPS, backup power
- Telecommunication
- Medical equipment
- Lighting

Technical Parameter

Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	200Ah (C ₅ , 25°C)
	Energy	5120Wh
	Internal Resistance	≤200mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.2C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	29.2±0.2V
	Charge Mode	0.2C to 29.2V, then 29.2,charge current 0.02C(CC/CV)
	Charger Current	40A
	Max.Charge Current	150A
	Charge Cut-off Voltage	29.6V±0.2V
Standard Discharge	Continuous Current	150A
	Max.Charge Current	450A(<3s)
	Discharge Cut-off Voltage	20V
Environmental	Charge Temperature	0°C to 45°C (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	0°C to 40°C (32F to 104F) @60±25% Relative Humidity
	Water Dust Resistance	
Mechanical	Cell & Method	3.2V50AH-8S4P
	Plastic Case	ABS
	Dimensions (in./mm.)	522*268*218 mm
	Terminal	M8
	Protocol (optional)	NO
	BMS	8S100A

NOTICE:Manual measurement, product specifications and dimensions may have errors, subject to actual receipt.