


24V 60Ah DATA SHEET



PRODUCT FEATURES

- Ultra safe lithium iron phosphate (LiFePO₄) cells
- Integrated battery management system (BMS)
- Longer service life: >2000 cycles service life
- Deep discharging: Can be 100% drained
- Light weight and compact
- LCD battery voltage & capacity gauge
- Water and dust resistant (IP65)
- Highly durable sealed ABS plastic enclosure
- Sealed and non-liquid (No fumes, no leaking, mount in any position)

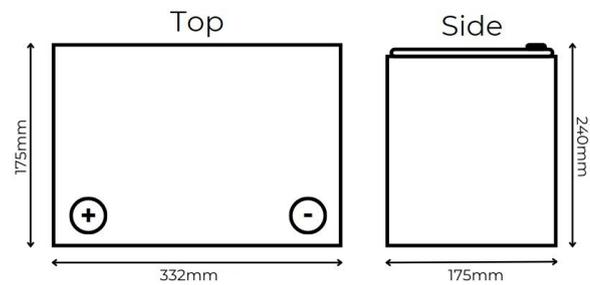

TYPICAL APPLICATION

- Single battery replaces 2 x 12v 100Ah deep cycle batteries in a 24v system.
- Long life lithium alternative to 2 x 12v 100Ah lead acid batteries in a 24v system.
- Perfect for 1000W-2400W 24v inverter / chargers
- Backup / load-shedding solution battery

TECHNICAL SPECIFICATION

Model		RP-24V-60AH	
Nominal Voltage	25.6V	Recommended Discharge Low Voltage	24V
Usable Capacity	1536Wh	Recommended Bulk Charge Voltage	28.8V
Nominal Capacity @ 0.2C	60Ah	Recommended Float Charge Voltage	27.6V
Dimensions (L x W x H) (mm)	332 x 175x 240	Self-Discharge Rate	< 3.5% per month
Weight (kg)	11.3kg	Operating Temperature Range	Charge: 0°C to 45°C Discharge: -20°C to 60°C
Terminal Connectors	M8 Terminals	Humidity Range	< 95% RH
Display	LCD SOC & V	Protection	Over-voltage Under-voltage Short circuit
Discharge Current Max Continuous	60A	IP Rating	IP65
Peak Discharge Current (< 3s)	120A	Casing Material	ABS Plastic
Charge Current Max Continuous	60A	Expected Lifespan	100%DoD > 2000 cycles 80%DoD > 3000 cycles 50%DoD > 5000 cycles (0.2C charging and discharging, 25°C)
Cell Type	Cylindrical LFP LiFePO ₄	Warranty	3 years / 3000 cycles
Operating Voltage Range	24V - 28.8V	Certifications	UN38.3 MSDS UL1973 UL9540A