



TALL TUBULAR CONVENTIONAL BATTERY (200Ah ~ 250Ah)



ISSUE OCT. 2021



TALL TUBULAR BATTERY

200Ah ~ 250Ah

Product Features :

1. Robust Tubular with High Pressure diecasted spine- resulting low rate of spine corrosion.
2. Spill Proof Vent plug – resulting in no spillage on top and low controlled acid fumes.
3. Optimized Negative paste receipt for fast charge acceptance
4. Consistent backup throughout life
5. Excellent behavior in PSOC condition as compare
6. Low Self Discharge
7. Excellent performance on deep cyclic application as compare to AGM VRLA
8. Very High Design & Service Life
9. Low water loss



Technical Specifications

Model	Nominal Voltage	Rated Capacity 20 Hr @ 27°C (Ah)	Dimensions in mm			Filled Battery Weight [Kg] [±3%]	Terminal Type
			Length (± 3 mm)	Width (± 3 mm)	Height (± 3 mm)		
PWR 150 [12 V 150 AH @ C20]	12	150	498	187	417	55.5	L
PWR 200 [12 V 200 AH @ C20]	12	200	498	187	417	61.5	L
PWR 220 [12 V 220 AH @ C20]	12	220	498	187	417	70	L
PWR 250 [12 V 250 AH @ C20]	12	250	498	187	417	75.0	L

Electrical Parameters & Charging Profile

Battery Specified Capacity Test @ 27 °C						
	C20 @10.5V	C10 @10.5V	C7 @10.5V	C5 @10.5V	C3 @10.5V	C1 @10.5V
PWR 150 [12 V 150 AH @ C20]	150	135	124	112	97	68
PWR 200 [12 V 200 AH @ C20]	200	180	166	150	129	90
PWR 220 [12 V 220 AH @ C20]	220	200	184	166	143	100
PWR 250 [12 V 250 AH @ C20]	250	220	198	182	150	110

Ah & Wh Efficiency

Ah Efficiency	>90%	Wh Efficiency	>75%
---------------	------	---------------	------


TALL TUBULAR BATTERY

200Ah ~ 250Ah


Poly Components Material :- Polypropylene Co polymer
 Watering system :- Individual to every cell in Monobloc
 Testing Parameters :- IS 13369:1992 & IEC 60896-11



Charging Profile

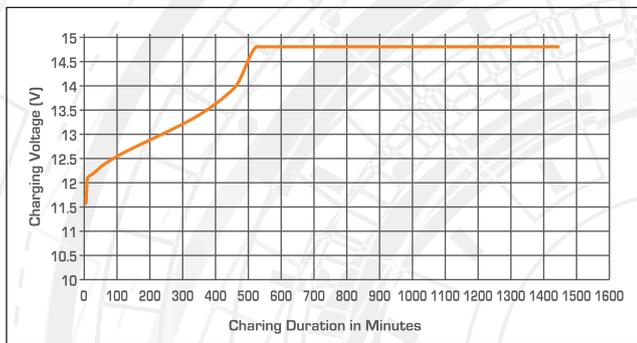


Self Discharge Characteristics @ Different Temperature

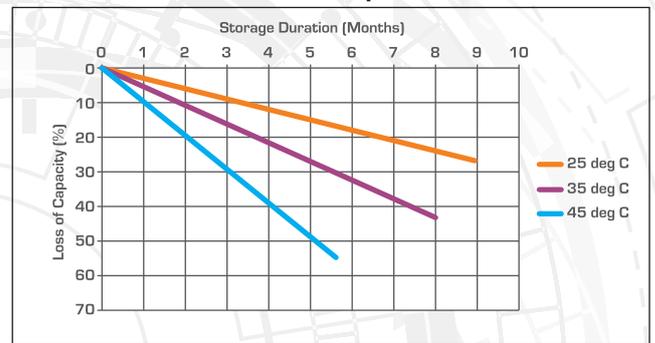


State of Charge Measure of Open-circuit Voltage @ 27°C

State of Charge	Specific Gravity	Voltage
100%	1.245-1.275	12.55V-12.70V
75%	≤ 1.225	≤ 12.4V
50%	≤ 1.190	≤ 12.1V
25%	≤ 1.155	≤ 12.0V
0%	1.120	11.8V


Discharging Characteristics at various rates @ 27°C

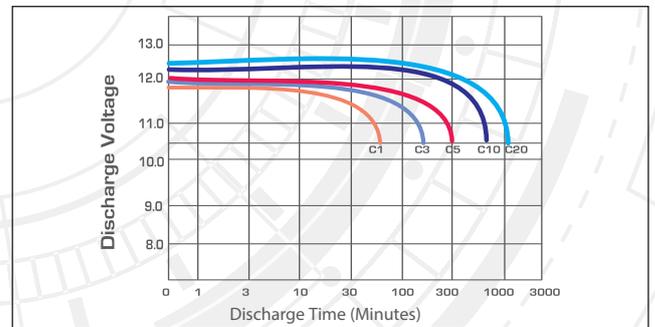

Service (Float) Life and Temperature

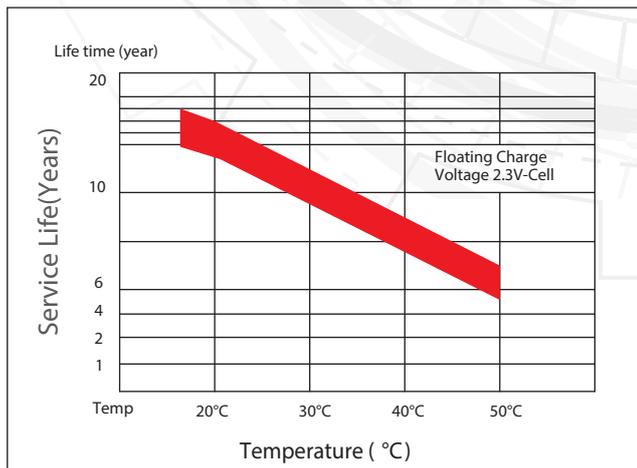

Expected Capacity vs Temperature

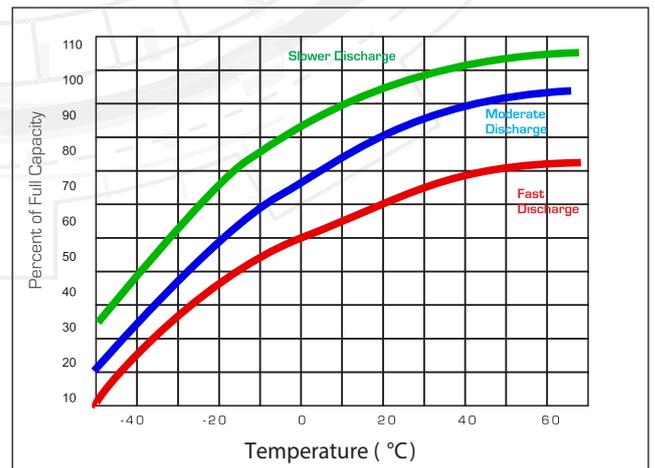

TALL TUBULAR BATTERY


200Ah ~ 250Ah



Specific Gravity & Self Discharge w.r.t. Temperature

	Add	Subtract
CHARGING TEMPERATURE COMPENSATION	0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C or 0.0028 volt per cell for every 1°F above 77°F
OPERATIONAL DATA	Operating Temperature -4°F to 131°F (-20°C to +55°C) At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Self Discharge As per discharge Graph

Expected Life

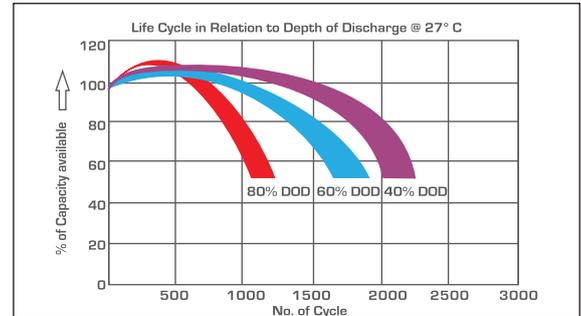

Charging Instructions

Charger Voltage Settings (at 77° F/ 25°C)			
System Voltage	12V	24V	48V
Maximum Charge Current	0.2C10		
Maximum Absorption Phase Time (hours)	4		
Absorption Voltage	14.4	28.8	57.6
Float Voltage	13.6	27.2	54.4
Equalization Voltage	16	32	64
Do not install or charge batteries in a sealer or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.			
Periodic Charge	Provide a periodic freshening charge to maintain a SOC greater than the threshold of 70%		

Comparison in between PCE TUBULAR & AGM VRLA

S.No	Parameter	PCE Tall Tubular Conventional	AGM VRLA
1	Plate Technology	Tall Tubular Plate	Flat Pasted Plate
2	Life w.r.t Application	Excellent performance on cyclic application	Not good for deep cycle application.
3	Application	"Power Backup Solution-Solar/Inverter/UPS Suitable for Float Application above 1 Hour discharge rate"	"Power Back up - Inverter/UPS Good for float & stand by application"
4	Electrolyte	Free Flow Electrolyte	Electrolyte in-between AGM
5	Water Loss	Low	Negligible
6	Water Top up	Low water top up	No water top up throughout Warranty Life
7	Life Extension	Long life with regular water top up	Not Applicable
8	Self Discharge	Low <3.0%	Very Low < 2.0%
9	Life Cycle w.r.t DOD @27° C @ 80% DoD	1100 Cycle	450 Cycle
10	Spillage	Low Spill-proof	Spill-proof
11	Fumes	Low Fumes	No
12	Recovery in PSOC	Excellent	Low
13	Charger Settings	Generic set point for chargers	Required special set point for chargers
14	Operating Temperature Range	-20 Degrees to +55 Degrees	-15 Degrees to +40 Degrees
15	Terminal Type	L-Type Terminal	Stud Type Terminal

Terminal Configuration :-
Terminal Type :- L
Terminal Height :- 24 mm
Torque Value :- 8-10 N.m
Bolt Type :- M8



Vent Plug Type :-
M22 coin type



Vent Plug Type :-
M30 Dummy Plug



North America
PCE POWER INC
4805 Colombo Cres.
Mississauga, ON
Toronto - Canada

ME&A
PCE POWER FZE
LOB 18-2007,
Jebel Ali Free Zone
Dubai - United Arab Emirates

Europe
PCE POWER EUROPE
2 Steliou Mavrommati
Nicosia - Cyprus

Asia Pacific
PCE POWER CHINA LTD
20/F., Champion Building,
Des Voeux Rd, Sheung Wan,
Hong Kong - China



LFST518EN115© 2021 PCE POWER INC.
All trademarks are property of their respective owners.
Specifications subject to change without notice.