



IQ7 Series Microinverters

The high-powered smart grid-ready Enphase IQ7 Series Microinverters dramatically simplify the installation process while achieving the highest system performance.



Q-DCC-2 adapter cable
Connect PV modules quickly and easily to IQ7 Series Microinverters using the included Q-DCC-2 adapter cable with plug-and-play MC4 connectors.



IQ Cables
The IQ Cables allow quick and safe connection of the microinverters. With 3P variants, the installed capacity is automatically distributed evenly across all three phases.



IQ Gateway
The IQ Gateway is the platform for energy management and integrates with the IQ Microinverters and IQ Batteries to provide complete control and insights into the Enphase Energy System.



IQ Relay single-phase and multi-phase
Production and storage, circuit integrated, NS-protection device with PLC-Phase coupler (3P) and DC current injection monitoring*.

Easy to install

- Lightweight and compact with plug-and-play connectors
- Power line communication (PLC) between components
- Familiar AC cabling architecture

High productivity and reliability

- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Safer AC cabling methods

Smart grid-ready

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles



IQ7 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 25 years**.

* IQ Relay is not required in all countries. Check local grid connection requirements to confirm.

**A 25-year warranty is valid, provided an internet-connected IQ Gateway is installed.

IQ7 Series Microinverters

INPUT DATA (DC)		UNITS	IQ7-60-2-INT	IQ7PLUS-72-2-INT	IQ7X-96-2-INT	IQ7A-72-2-INT
Typical module compatibility	—	—	60-cell/120-half-cell	60-cell/120-half-cell 66-cell/132-half-cell 72-cell/144-half-cell	96-cells only	60-cell/120-half-cell 66-cell/132-half-cell 72-cell/144-half-cell
No enforced DC/AC ratio and maximum input power. Modules can be paired as long as the maximum input voltage is not exceeded and the maximum input current of the inverter at the lowest and highest temperatures is respected. See the compatibility calculator at https://enphase.com/en-gb/installers/microinverters/calculator .						
Minimum/Maximum input voltage	U_{dcmin} / U_{dcmax}	V	16/48	16/60	25/79.5	18/58
Start-up input voltage	$U_{dcstart}$	V	22	22	33	33
Rated input voltage	$U_{dc,r}$	V	32	36	58.5	40.5
Minimum/Maximum MPP voltage	U_{mppmin} / U_{mppmax}	V	27/37	27/45	53/64	38/43
Minimum/Maximum operating voltage	U_{opmin} / U_{opmax}	V	16/48	16/58	25/79.5	18/58
Maximum input current	I_{dcmax}	A	10	12	6.5	10.2
Maximum short-circuit DC input current	I_{scmax}	A	25	25	10	25
Maximum module Isc	—	A	20	20	10	20
Maximum input power	P_{dcmax}	W	350	440	460	500
OUTPUT DATA (AC)		UNITS	IQ7-60-2-INT	IQ7PLUS-72-2-INT	IQ7X-96-2-INT	IQ7A-72-2-INT
Maximum apparent power	$S_{ac,max}$	VA	245	295	320	366
Rated power	$P_{ac,r}$	W	240	290	315	349
Nominal grid voltage	U_{acnom}	V	230			
Minimum/Maximum grid voltage	U_{acmin} / U_{acmax}	V	184/276			
Maximum output current	I_{acmax}	A	1.07	1.28	1.39	1.59
Nominal frequency	f_{nom}	Hz	50			
Minimum/Maximum frequency	f_{min} / f_{max}	Hz	45/55			
Maximum units per single-phase/multi-phase 20 A circuit	$16 A / I_{acmax}$	—	15 (L+N)/45 (3L+N)	12 (L+N)/36 (3L+N)	11 (L+N)/33 (3L+N)	10 (L+N)/30 (3L+N)
For IQ Cable with 2.5 mm ² stranded conductors and using a 1.25 safety factor, 16 A per phase is calculated as the maximum current according to IEC 60364. The safety factors applied may vary based on local regulations or best practices, as well as upon the characteristics the OCPD selected.						
Maximum units per single-phase/multi-phase IQ Cable section	—	—	15 (L+N)/24 (3L+N)	12 (L+N)/21 (3L+N)	11 (L+N)/21 (3L+N)	10 (L+N)/18 (3L+N)
Centre feeding is the best practice. These design limits should ensure voltage rise and line conductor resistance on the IQ Cable are maintained within acceptable limits. In locations with a risk of high grid voltage at the point of connection, it may be necessary to decrease the maximum number of microinverters on the IQ Cable section by as much as 50%.						
Protective class (all ports)	—	—	II			
Total harmonic distortion	—	%	<5			
Power factor setting	—	—	1.0			
Power factor range	cos phi	—	0.8 leading ... 0.8 lagging			
Inverter maximum efficiency	η_{max}	%	97.40	97.24	97.69	97.23
European weighted efficiency	η_{EU}	%	96.5			
Inverter topology	—	—	Isolated (HF Transformer)			
Nighttime power loss	—	mW	50			
MECHANICAL DATA			IQ7-60-2-INT	IQ7PLUS-72-2-INT	IQ7X-96-2-INT	IQ7A-72-2-INT
Ambient air temperature range			-40°C to 65°C (-40°F to 149°F)			-40°C to 60°C (-40°F to 140°F)
Relative humidity range			4% to 100% (condensing)			
Overvoltage class AC port			III			

MECHANICAL DATA

IQ7-60-2-INT

IQ7PLUS-72-2-INT





IQ7X-96-2-INT

IQ7A-72-2-INT

Number of input DC connectors (pairs) per single MPP-tracker	1
AC connector type	Enphase IQ Cabling (refer to the IQ Cable and accessories data sheet)
DC connector type	Stäubli MC4 (using Q-DCC-2 adapter)
Dimensions (H x W x D)	212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2") (without mounting brackets)
Weight (with mounting plate)	1.08 kg (2.38 lb)
Cooling	Natural convection – no fans
Enclosure	Class II double-insulated, corrosion-resistant polymeric enclosure
IP rating	Outdoor - IP67
Maximum altitude	2600 m
Calorific value	37.5 MJ/unit

STANDARDS	IQ7-60-2-INT	IQ7PLUS-72-2-INT	IQ7X-96-2-INT	IQ7A-72-2-INT
Grid compliance (with IQ Relay)	TOR Erzeuger Typ A, C10/11, PPDS Annex 4, VFR 2019, VDE-AR-N 4105:2018, CEI 0-21, NEN1010, EN 50549-1, UNE206007-1/2			
Grid compliance (without IQ Relay)	G98, G98 NI, G99, G99 NI, G100			
Safety	EN IEC 62109-1, EN IEC 62109-2			
EMC	EN IEC 61000-3-2, 61000-3-3, 61000-6-2, 61000-6-3, EN IEC 50065-1, 50065-2-1			
Product labelling	CE, UKCA, and RCM			
Advanced grid functions ¹	Power export limiting (PEL), phase imbalance management (PIM), loss of phase detection (LOP), power factor control Q (U), cos (phi) (P)			
Microinverter communication	Power line communication (PLC) 110-120 kHz (Class B), Narrowband 200 Hz			

¹ Some of these functions require IQ Gateway Metered with current transformers and/or IQ Relay installed.

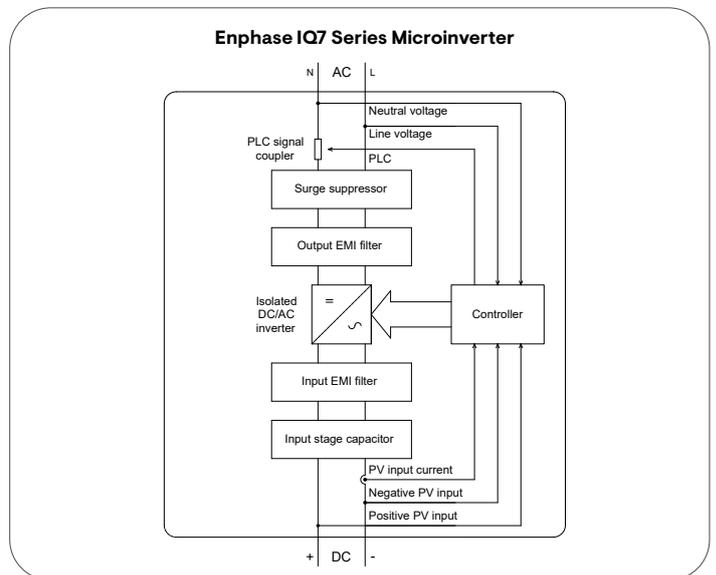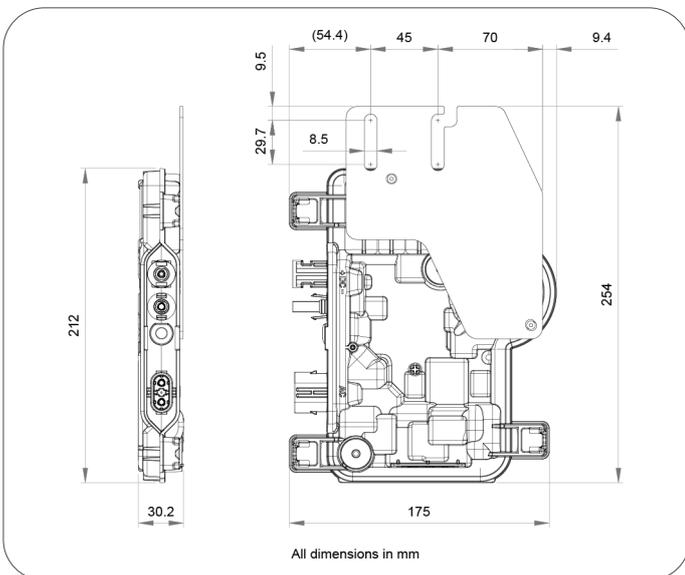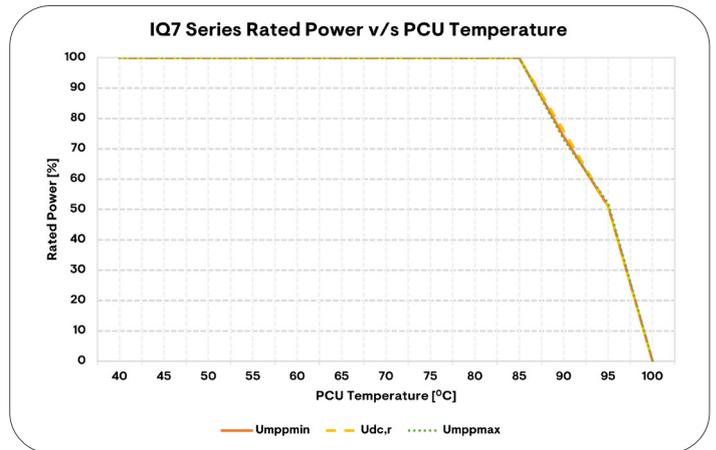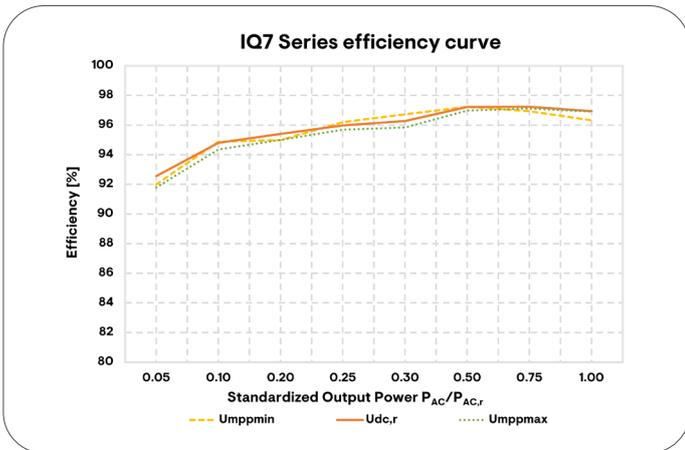

Assembled in China, India, and Mexico.

Enphase Energy NL B.V. Het Zuiderkruis 65 5215 MV, s-Hertogenbosch, The Netherlands Tel: +31 73 303 64 50

IQ7-QDCC2-DSH-00034-2.0-EN-EU-2024-07-09

Revision history

REVISION	DATE	DESCRIPTION
DSH-00034-2.0	April 2024	Updated the maximum operating voltage.
DSH-00034-1.0	May 2023	Updated the datasheet as per EN 50524:2021 compliance.
Previous releases.		