

## Off Grid Solar PV Modules

### Model No. HG100M 100W

#### Temperature Coefficients

Nominal Operating Cell Temperature	NOCT	°C	45+/-2
Voltage Temperature Coefficient(Voc)	$\alpha$	%°C	-0.32
Current Temperature Coefficient(Isc)	$\beta$	%°C	0.055
Power Temperature Coefficient(Pmpp)	$\gamma$	%°C	-0.39


#### Mechanical Data

Solar Cell	Monocrystalline, 182*70mm
Arrangement	36Cells(3*12)
Front Glass	3.2mm Tempered
Frame	Anodized Aluminium
Max. Static Snow Load, Front	5400Pa
Max. Static Wind Load, Back	2400Pa
Junction Box	IP65
Cables & Connectors	As Per Requirement


#### Electrical Data

STC: Irradiance 1000 W/m<sup>2</sup>(module temperature 25°C AM1.5)

Module Type	HG100M		
Nominal Peak Power	Pmax	Wp	100
Minimum Power Tolerance	$\Delta P_{max}$	%	-/+3
Max. Power Voltage	Vmp	V	20.2
Max. Power Current	Imp	A	4.95
Open-circuit Voltage	Voc	V	24.0
Short-circuit Current	Isc	A	5.38
Module Efficiency	$\eta_m$	%	19.1
Operating Temperature		°C	-40 to 85
Max Series Fuse Rating		A	5
Max. System Voltage	DC	V	1,000
Weight		KGS	5.6
Dimension		MM	905*580*30

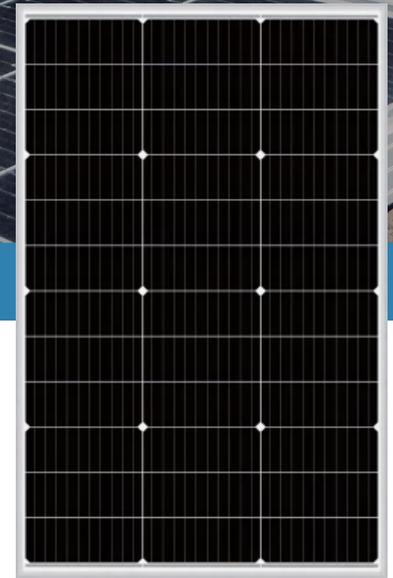

Dimensions unit : mm

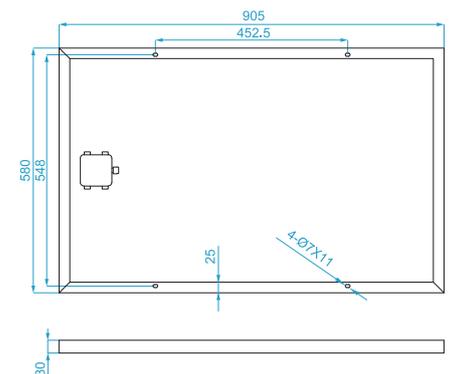

Materials & Workmanship Warranty



90% Power Output Warranty



80% Power Output Warranty

Warranty: Solar Modules with 25 years warranty

Contact Us for More Information

web: [www.higonsolar.com](http://www.higonsolar.com) email: [info@higonsolar.com](mailto:info@higonsolar.com)