

HALF-CELL BIFACIAL MODULE

TYPE: Bi PERC 580-600W




STOREPOWER

POWER OUTPUT MAX EFFICIENCY
580-600W **21.2%**

Mechanical Characteristics

Solar Cell	Monocrystalline silicon 210 mm
No. of Cells	120 (6 × 20)
Dimensions	2172 × 1303 × 35 mm (85.5 × 51.3 × 1.4 inches)
Weight	37.1 kgs (81.8 lbs.)
Front\ Back Glass	2.0+2.0 mm (0.079+ 0.079inches) semi-tempered glass
Output Cables	4.0 mm ² (-) 350 mm and (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0/+5 W
Refer. Bifaciality Factor	(70 ± 5)%
Packing Configuration	Packaging box dimensions (mm) : 1325×1120×2298 Packaging box weight (kg) : 1188 31 Pieces per pallet 558 Pieces per container / 40 ' HC

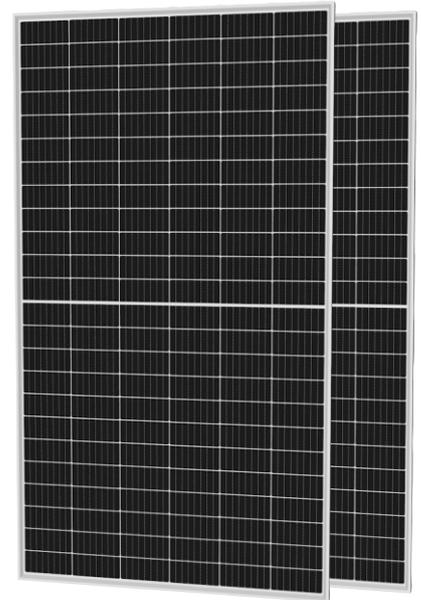

Electrical Characteristics

Module Type	Bi PERC 630W		Bi PERC 625W		Bi PERC 620W		Bi PERC 615W		Bi PERC 610W	
	STC	NMOT								
Testing Condition	STC	NMOT								
Maximum Power (Pmax/W)	600	452.5	595	448.9	590	445.0	585	441.4	580	437.5
Optimum Operating Voltage (Vmp/V)	34.65	32.4	34.45	32.2	34.25	32.0	34.05	31.9	33.85	31.7
Optimum Operating Current (Imp/A)	17.32	13.97	17.28	13.94	17.23	13.89	17.19	13.86	17.14	13.81
Open Circuit Voltage (Voc/V)	41.85	39.4	41.65	39.2	41.45	39.1	41.25	38.9	41.05	38.7
Short Circuit Current (Isc/A)	18.31	14.73	18.27	14.7	18.22	14.66	18.18	14.63	18.13	14.59
Module Efficiency (%)	21.2		21.0		20.8		20.7		20.5	

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.050%/°C



Different Rearside Power Gain

	5%	15%	25%
Rearside Power Gain	5%	15%	25%
Maximum Power at STC (Pmax)	619.5	678.5	737.5
Optimum Operating Voltage (Vmp/V)	34.25	34.25	34.35
Optimum Operating Current (Imp/A)	18.09	19.81	21.54
Open Circuit Voltage (Voc/V)	41.5	41.5	41.6
Short Circuit Current (Isc/A)	19.13	20.95	22.78
Module Efficiency (%)	21.9	24.0	26.1