

Silver Series
ERA-RC66HD


Product Range
610-630W

N-Type Rectangle Bifacial
Double Glass


630W
Maximum Power Output

0~+5W
Positive Power Tolerance

23.32%
Maximum Efficiency

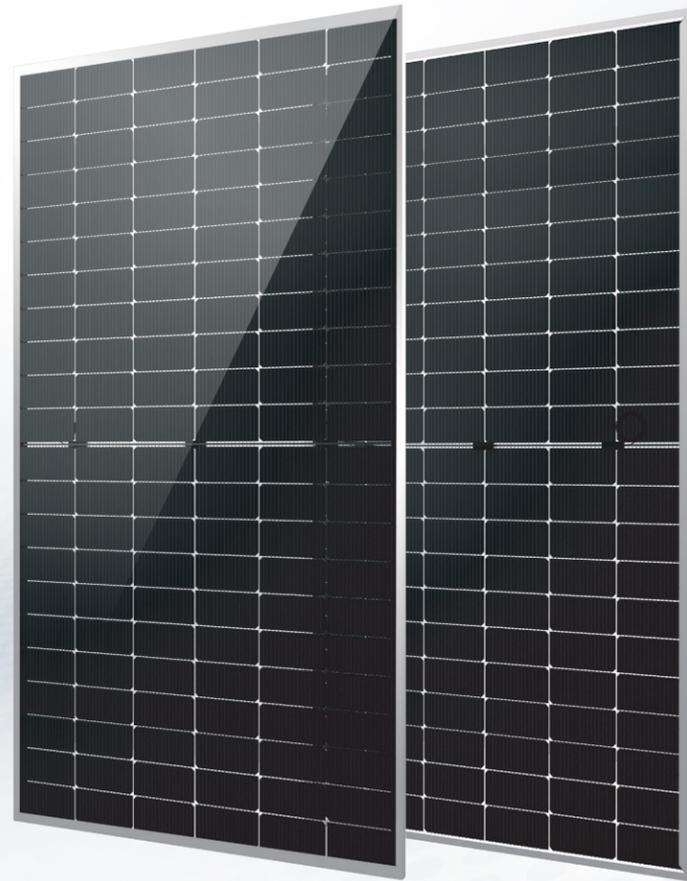

Linear Performance Warranty
15 Year Product Warranty
30 Year Linear Power Warranty
<1% First year Power Degradation
<0.4% Year 2-30 Power Degradation

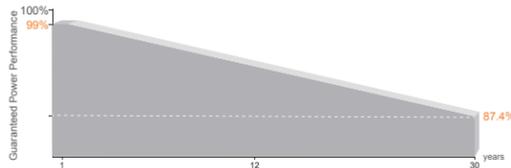

Certifications
Quality Management System and Product Certification.

IEC61215(2021), IEC61730(2023), IEC61701
IEC61215-2 (bifaciality): 2021
ISO9001:2015: Quality Management System
ISO14001:2015: Environment Management System
ISO45001:2018: Occupational health and safety management systems



Zhejiang ERA Solar Technology Co., Ltd.
www.erasolar.com.cn

MBB Half-Cut Rectangle Solar Cell
182x105mm, 132 cells.

Higher Module Conversion Efficiency
Higher module output up to 630W with module efficiency up to 23.32%.

Low-Light Performance
Advanced glass and surface texturing allow for excellent performance in low-light environments.

Transparent Dual-glass Design
Excellent fire rating, with better temperature coefficient.

Higher Power Output
Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.

Double Glass, 66-CELL HALF-CUT SERIES

ELECTRICAL PARAMETERS AT STC

Module Type: ERA-RC66HD	610M / 615M / 620M / 625M / 630M
Maximum Power(Wp)	610W 615W 620W 625W 630W
Open Circuit Voltage(Voc)	48.10V 48.30V 48.50V 48.65V 48.80V
Short Circuit Current(Isc)	16.05A 16.10A 16.15A 16.20A 16.25A
Maximum Power Voltage(Vm)	39.77V 39.96V 40.15V 40.30V 40.47V
Maximum Power Current(Imp)	15.34A 15.39A 15.45A 15.51A 15.57A
Module Efficiency	22.58% 22.77% 22.95% 23.14% 23.32%
Maximum Series Fuse	30A
Watts Positive Tolerance	0~+5W
Number Of Diode	3
Standard Test Conditions	1000W/M ² , 25°C, AM1.5
Maximum System Voltage	1500V/DC
Temperature-Coefficient Isc	+0.043%/°C
Temperature-Coefficient Voc	-0.24%/°C
Temperature-Coefficient Pmpp	-0.30%/°C
Operating Temperature	-40°C...+85°C
Normal Operating Cell Temperature	45±2°C
Load Capacity For The Cover Of The Module (Glass)	5400Pa(IEC61215)(snow)
Load Capacity For The Front & Back Of The Module	2400Pa(IEC61215)(wind)

132HC BNPI (1000w/m² + 135w/m²)

Module Type: ERA-RC66HD	610M / 615M / 620M / 625M / 630M
Maximum Power(Wp)	671W 677W 682W 688W 694W
Open Circuit Voltage(Voc)	48.12V 48.32V 48.51V 48.67V 48.83V
Short Circuit Current(Isc)	17.66A 17.71A 17.77A 17.83A 17.89A
Maximum Power Voltage(Vm)	39.78V 39.97V 40.17V 40.33V 40.52V
Maximum Power Current(Imp)	16.87A 16.94A 16.98A 17.06A 17.13A

132HC BSI (1000w/m² + 300w/m²)

Module Type: ERA-RC66HD	610M / 615M / 620M / 625M / 630M
Maximum Power(Wp)	750W 756W 763W 769W 775W
Open Circuit Voltage(Voc)	48.12V 48.32V 48.50V 48.67V 48.83V
Short Circuit Current(Isc)	19.74A 19.80A 19.86A 19.93A 20.00A
Maximum Power Voltage(Vm)	39.79V 39.98V 40.15V 40.33V 40.52V
Maximum Power Current(Imp)	18.86A 18.92A 18.99A 19.07A 19.13A


MECHANICAL CHARACTERISTICS

Front Cover (Material / Thickness)	low-iron tempered glass 2.0 / 2.0 mm
Cell (Quantity / Material / Dimensions)	132(6x11x2) / monocrystalline silicon, bifacial
Frame (Material / Color)	aluminum hollow-chamber frame on each side anodized aluminum alloy / silver
Junction Box (Protection Degree)	≥IP68
Cables & Plug Connectors	4mm ² , 300mm in length, length can be customized
Module Dimensions (L / W / H)	2382(±2)x1134(±2)x30/35mm
Module Weight	32.5kg / 33kg
Application Class	Class A
Electrical Protection Class	Class II
Fire Safety Class	Class A


PACKING

Container Size	Units/Pallet (PCS)	Weight/Pallet (KG)	Pallet Measurement (mm)	Units/Container (PCS)
40HQ	36 (30mm)	1210	1140x1120x2540	720
	31 (35mm)	1060	1140x1120x2540	620

CURRENT-VOLTAGE CURVES:

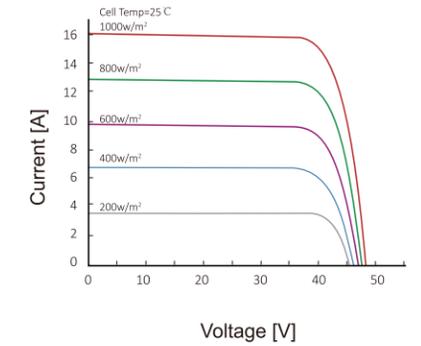

Module characteristics at constant module temperatures of 25°C and variable levels of irradiance

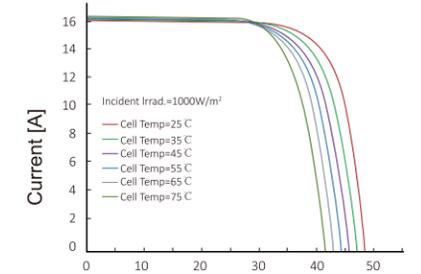

Module characteristics at variable module temperatures and constant module irradiance of 1.000 W/m²

MODULE DIAGRAM:

