

1500VDC光伏4.0分支连接器2转1

1500VDC PV4.0 Branch Connector 2 In 1


产品规格 Product Specifications

| | | | |
|---|----------------------------|---|--------------------------------|
| 绝缘材料 Insulation material | PPE | 安全等级 Safety degree | II |
| 额定电流 Rated current | 60A | 阻燃等级 Flame class | UL94-V0 |
| 额定电压 Rated voltage | 1500VDC | 环境温度范围 Ambient temperature range | -40°C...+85°C(IEC) |
| 测试电压 Test voltage | 8kV(50Hz,1min) | 适配电线规格 Suitable cable cross sections | 2.5~10mm ² /14~8AWG |
| 连接器接触电阻 Contact resistance | ≤0.25mΩ | 连接方式 Connecting system | 插接Plug type |
| 金属导体材料 Contact material | 铜,镀锡 Copper, Tin plated | 温度上限 Upper limiting temperature | 110°C(IEC) |
| 保护等级 Degree of protection | IP68 (1m,1H) | 额定脉冲电压 Rated Impulse voltage | 16kV |
| 过压等级 Overvoltage category/Pollution degree | CATIII/2 | 符合标准 Regulatory approval | TUV/CE(IEC62852) |

图示:

Drawing:

负极
Negative

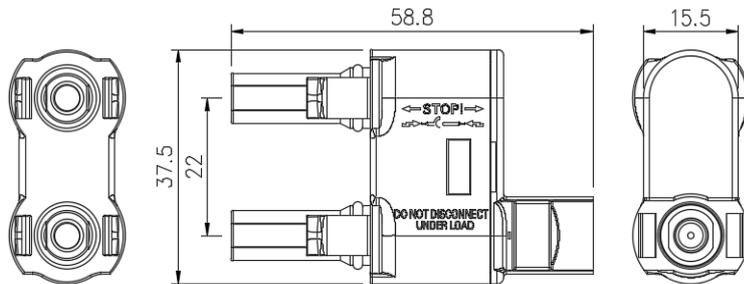


2母1公
2 Female to 1 Male

4BN-15



正极
Positive

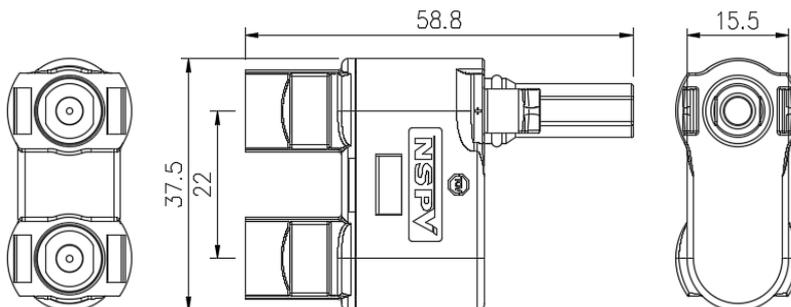

2公1母
2 Male to 1 Female

4BP-15

