

光伏2转1型线束（H型）

PV 2 to1 Cable Assembly (H Type)

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 2F1M // H21Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

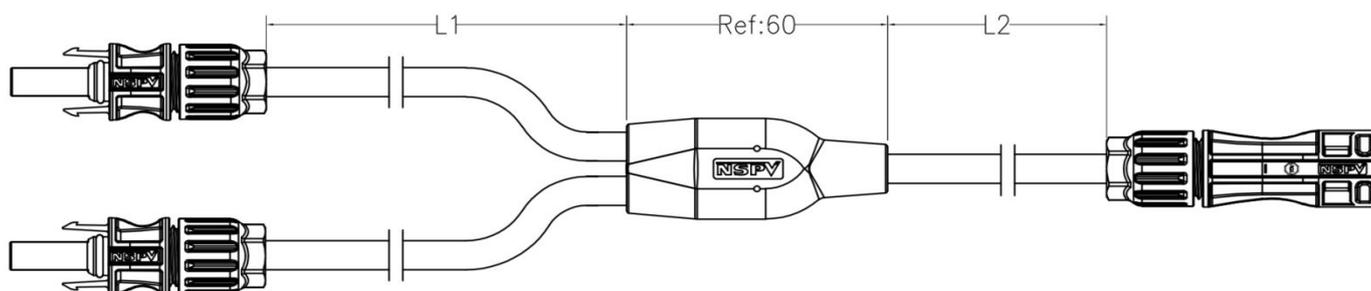

光伏2转1型线束（H型）

PV 2 to1 Cable Assembly（H Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 2M1F // H21Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

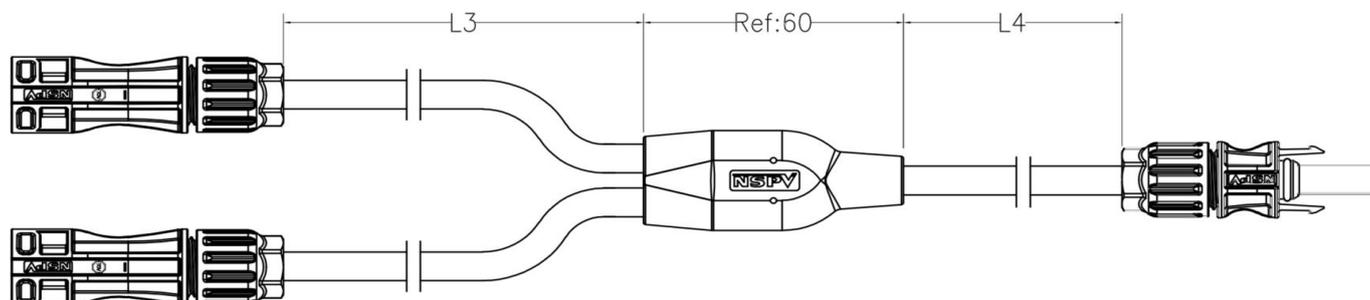

光伏2转1型线束（H型） PV 2 to1 Cable Assembly（H Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz, Imin)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 2F1M // H21Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

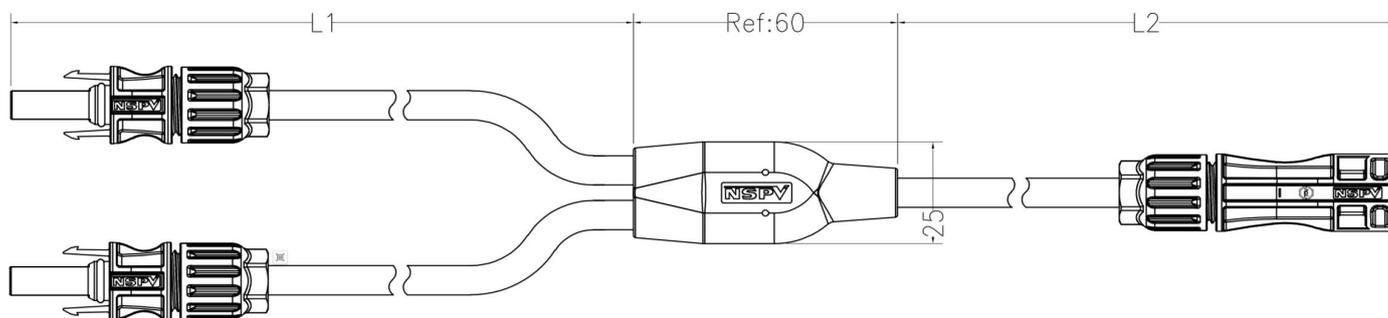

光伏2转1型线束（H型） PV 2 to1 Cable Assembly（H Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 2M1F // H21Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

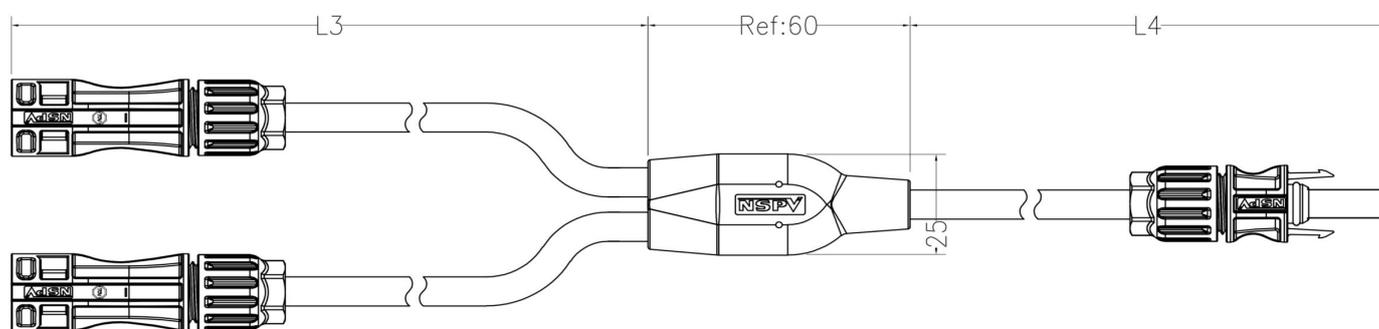

光伏2转1型线束 (T型) PV 2 to1 Cable Assembly (T Type)

产品规格 Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示: Drawing:

■ T-Cable 2M1F // T21Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm		

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm		

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm		

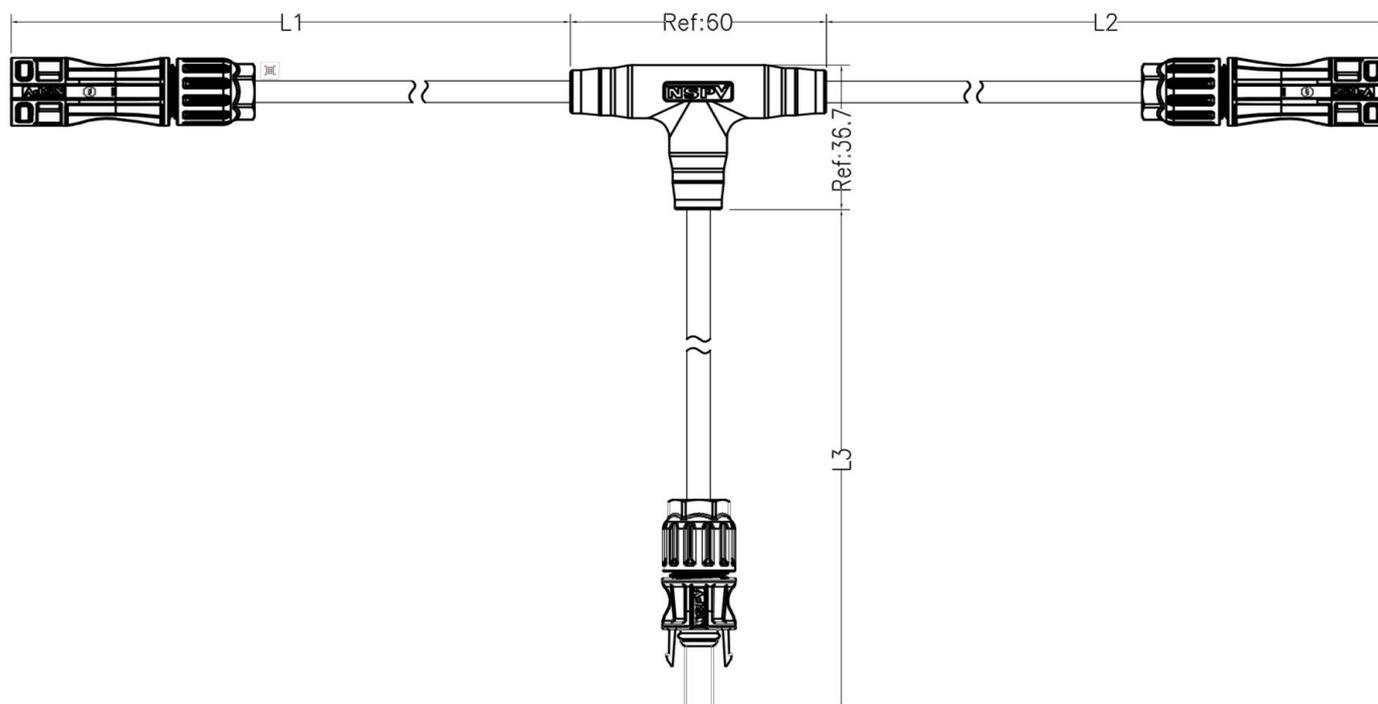

光伏2转1型线束 (T型) PV 2 to1 Cable Assembly (T Type)

产品规格 Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示: Drawing:

■ T-Cable 2F1M // T21Y15***

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L5:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L6:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

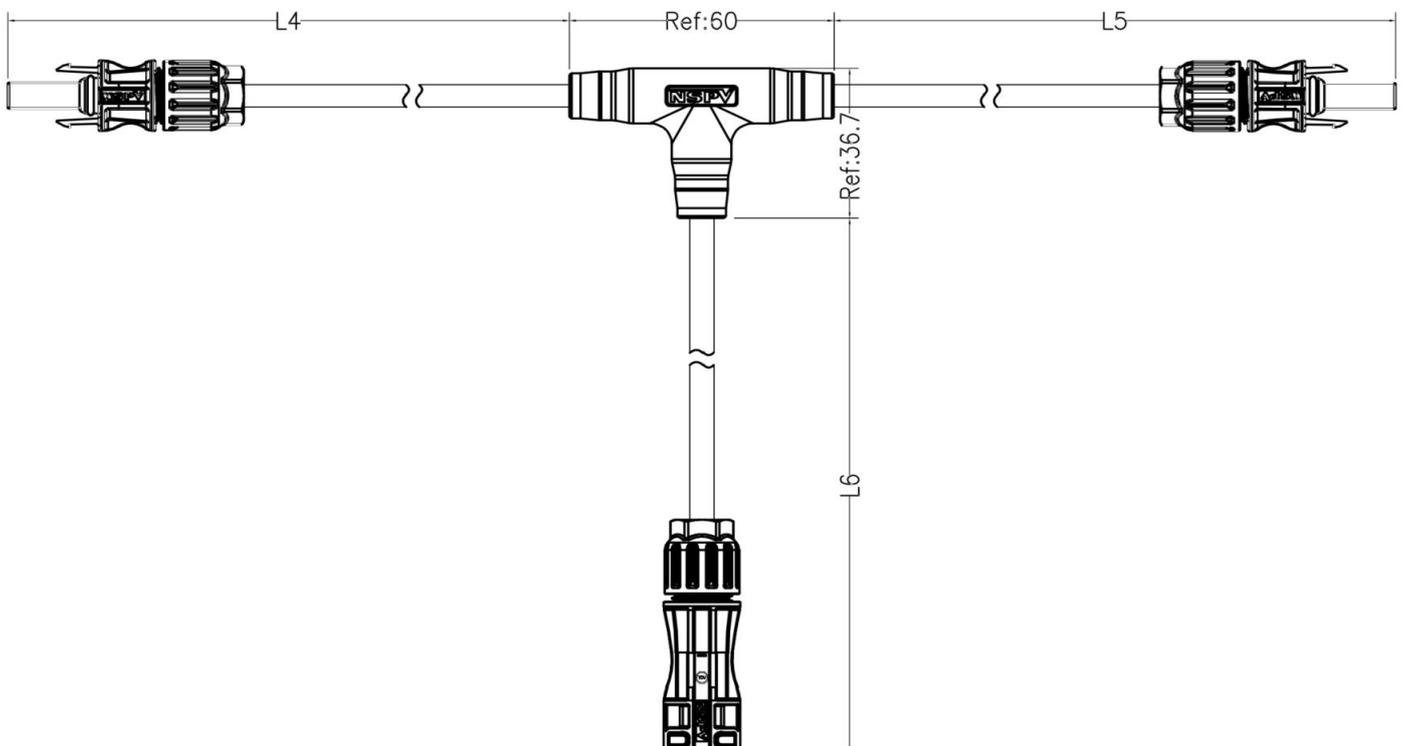

光伏2转1型线束 (Y型) PV 2 to1 Cable Assembly (Y Type)

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+90°C(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110°C(IEC)
保护等级 Degree of protection	IP68		

图示:


Drawing:

Y-Cable 2F1M // Y21Y15***

L1: Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

L2: Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

L3: Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

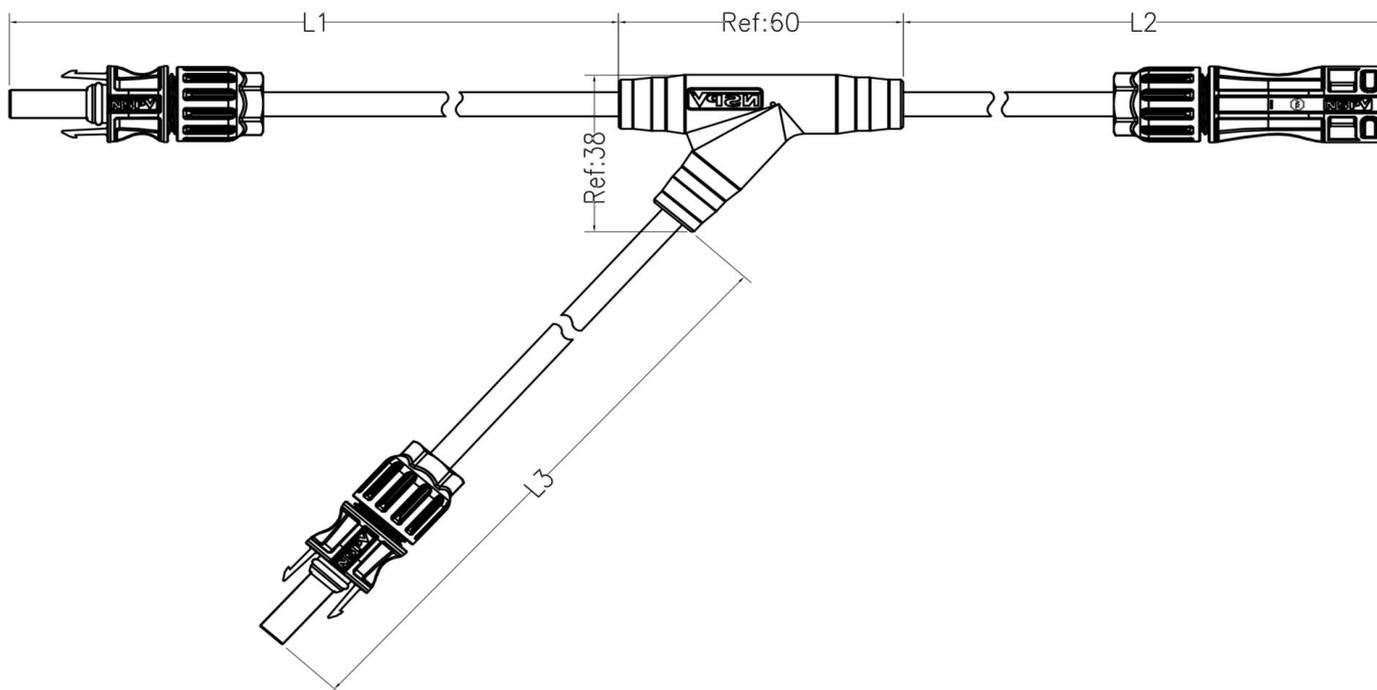

光伏2转1型线束（Y型） PV 2 to1 Cable Assembly（Y Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+90°C(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	温度上限 limiting temperature	Upper 110°C(IEC)
保护等级 Degree of protection	IP68		

图示:

Drawing:

Y-Cable 2M1F // Y21Y15***

L4:


Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

L5:

Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

L6:

Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
	<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
Cable Length:	100	mm	

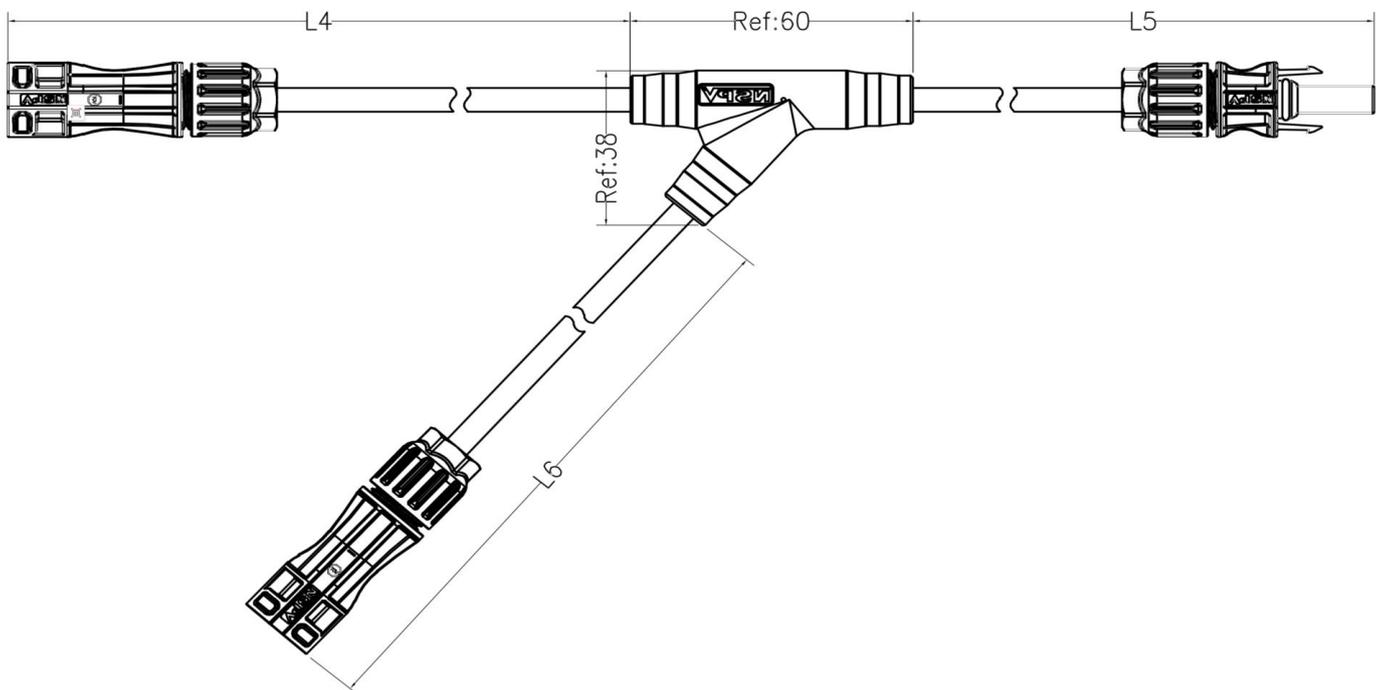

光伏3转1型线束（Y型） PV 3 to1 Cable Assembly（Y Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+90°C(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110°C(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 3F1M // Y31Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

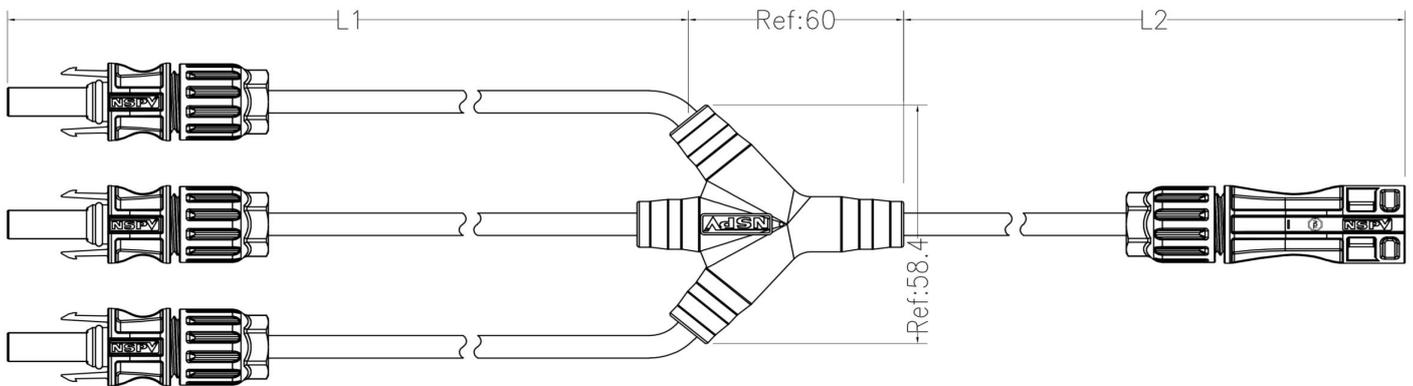

光伏3转1型线束（Y型） PV 3 to1 Cable Assembly（Y Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 3M1F // Y31Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

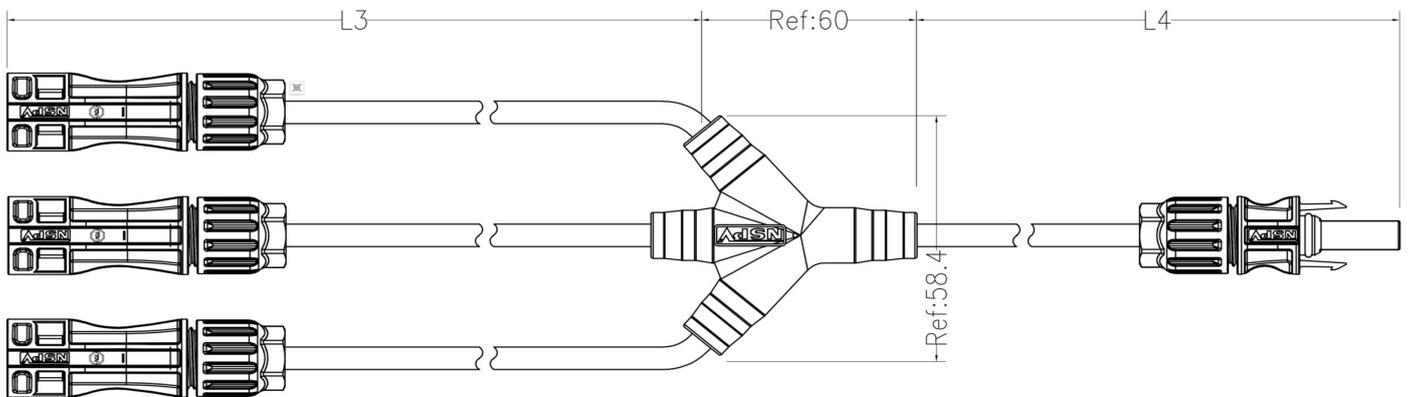

光伏3转1型线束（十型）

PV 3 to1 Cable Assembly（+ Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		

图示:

Drawing:


■ 十-Cable 3F1M // +31Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

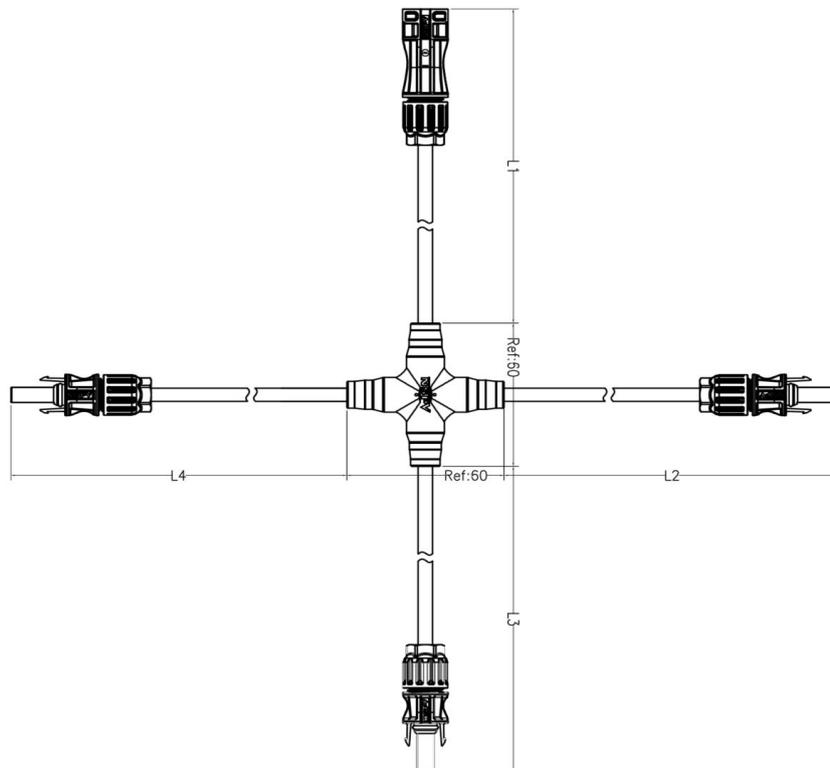

光伏3转1型线束（十型）

PV 3 to1 Cable Assembly（+ Type）

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ 十-Cable 3M1F // +31Y15***

L5:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/>
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	
L7:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L6:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	
L8:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

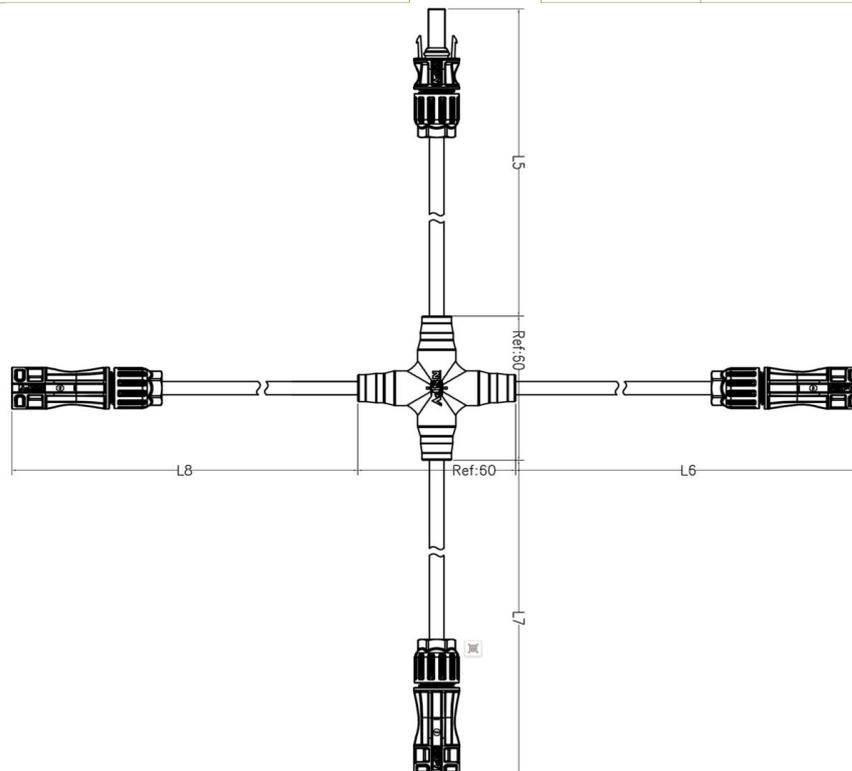

光伏4转2型线束 I PV 4 to2 Cable Assembly I

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

Y-Cable 4to2 // 42Y01***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100 mm		

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100 mm		

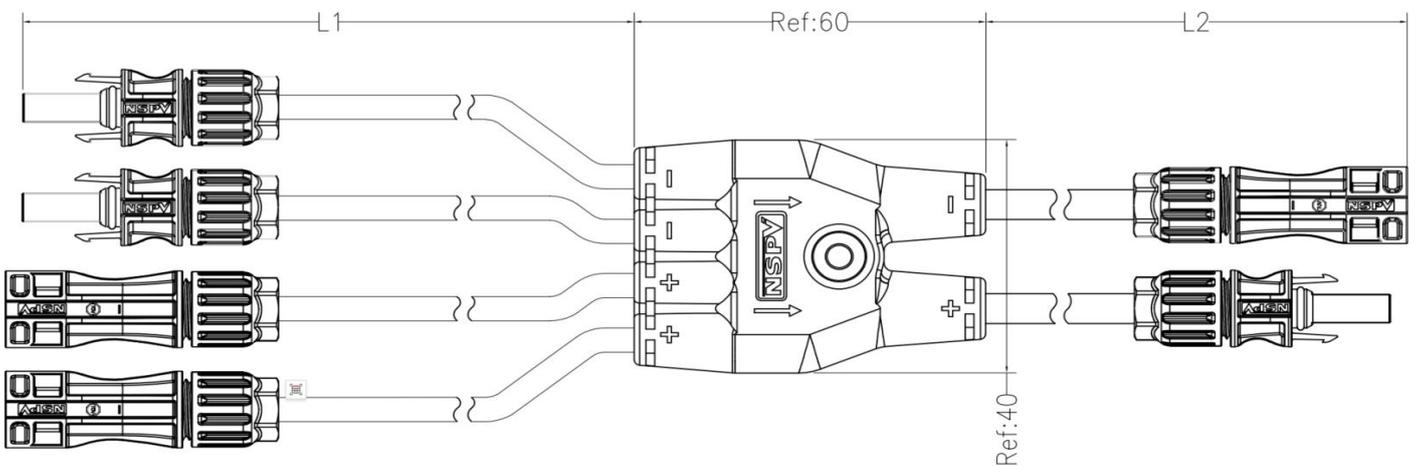

光伏4转2型线束 II

PV 4 to2 Cable Assembly II

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+90°C(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110°C(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

Y-Cable 4F2M // 42Y02***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100 mm		

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100 mm		

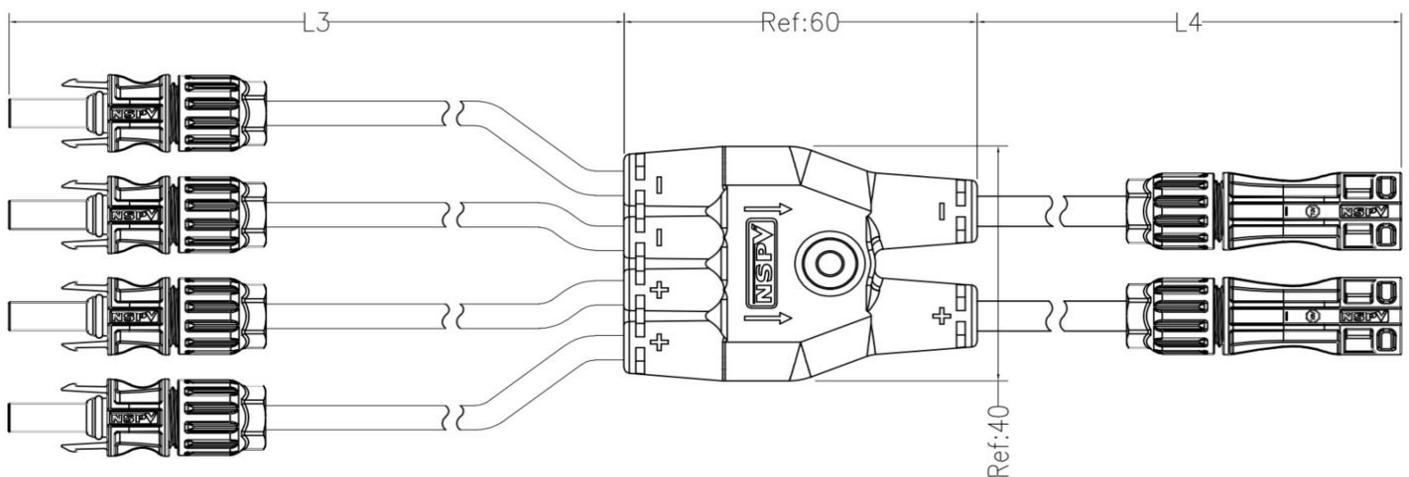

光伏4转2型线束 III

PV 4 to2 Cable Assembly III

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 4M2F // 42Y03***

L5:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L6:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

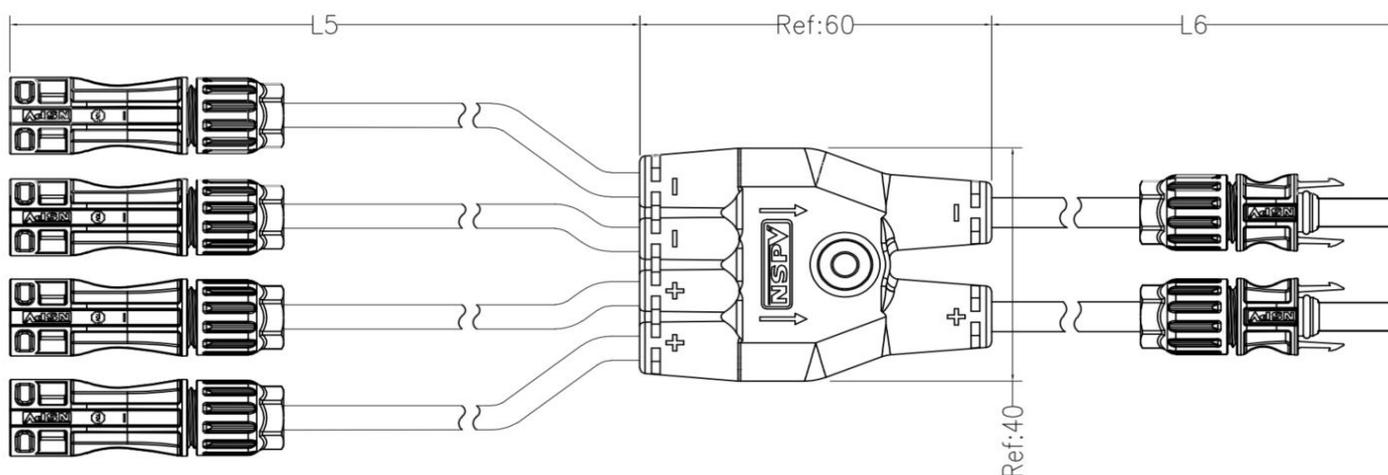

光伏4转1型线束 PV 4 to 1 Cable Assembly

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 4F1M // 41Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

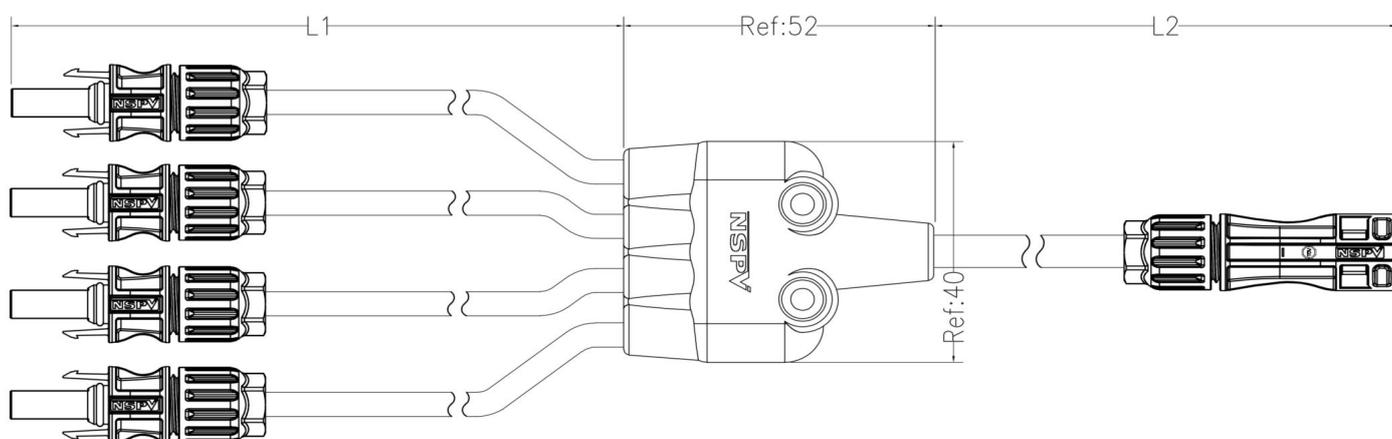

光伏4转1型线束 PV 4 to 1 Cable Assembly

产品规格 Product Specifications


绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		

图示: Drawing:

■ Y-Cable 4M1F // 41Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

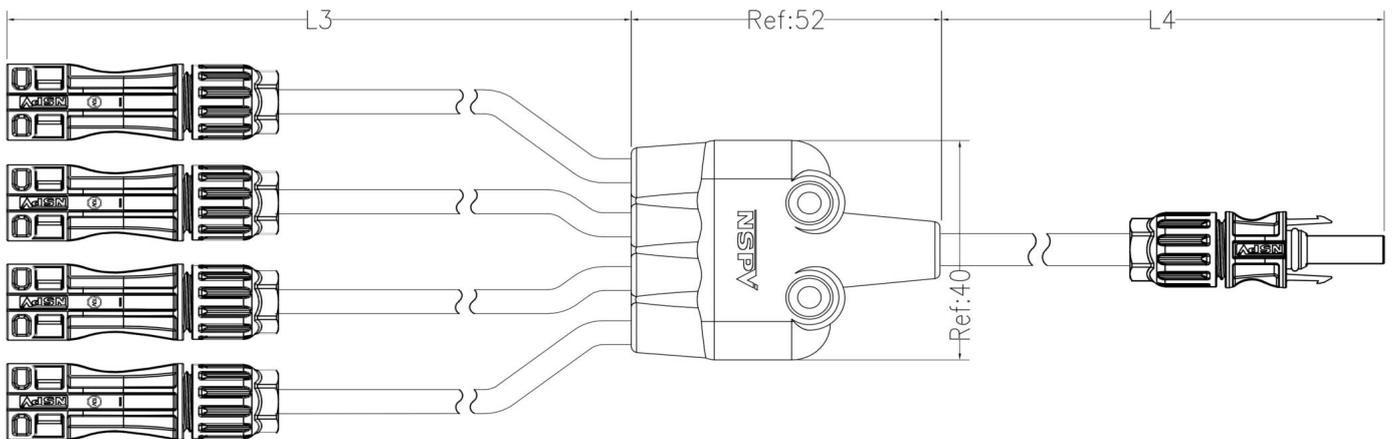

光伏5转1型线束 PV 5 to 1 Cable Assembly

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+90°C(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜,镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110°C(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 5F1M // 51Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

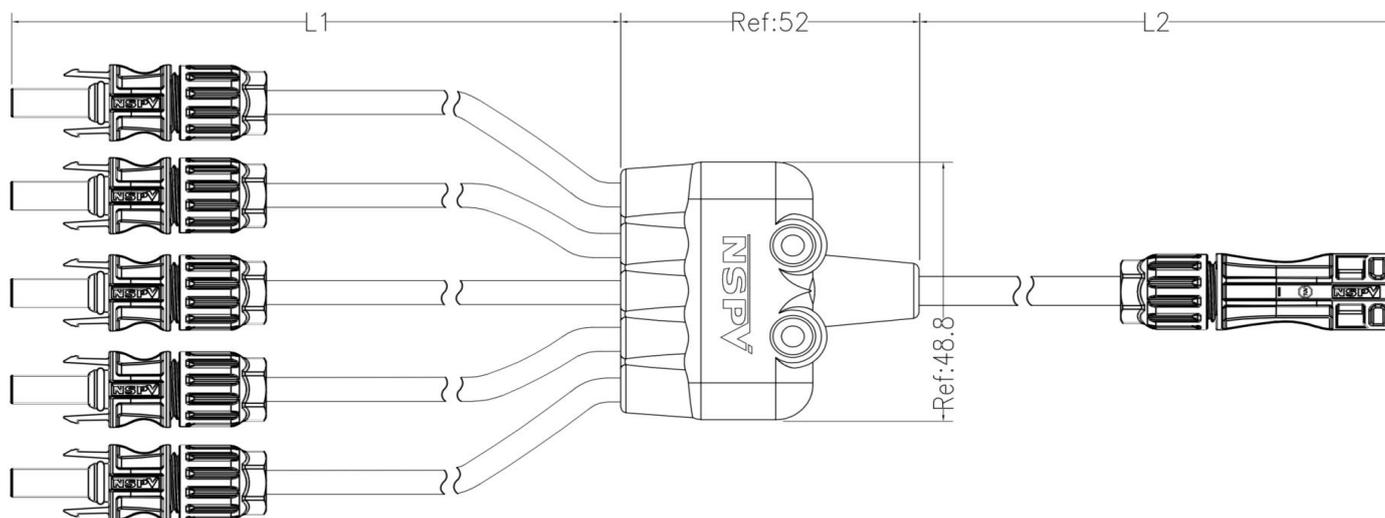

光伏5转1型线束 PV 5 to 1 Cable Assembly

产品规格 Product Specifications


绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		

图示: Drawing:

■ Y-Cable 5M1F // 51Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input type="checkbox"/> B/K	
	Cable Length:	100	mm	

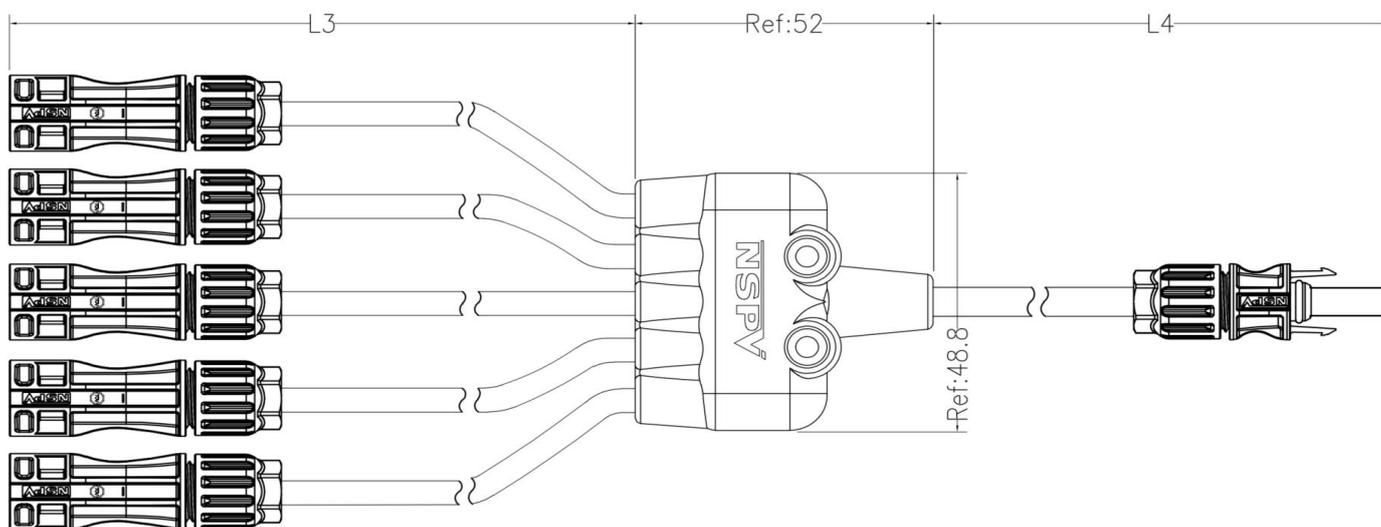

光伏6转1型线束 PV 6 to 1 Cable Assembly

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		


图示:

Drawing:

■ Y-Cable 6F1M // 61Y15***

L1:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L2:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

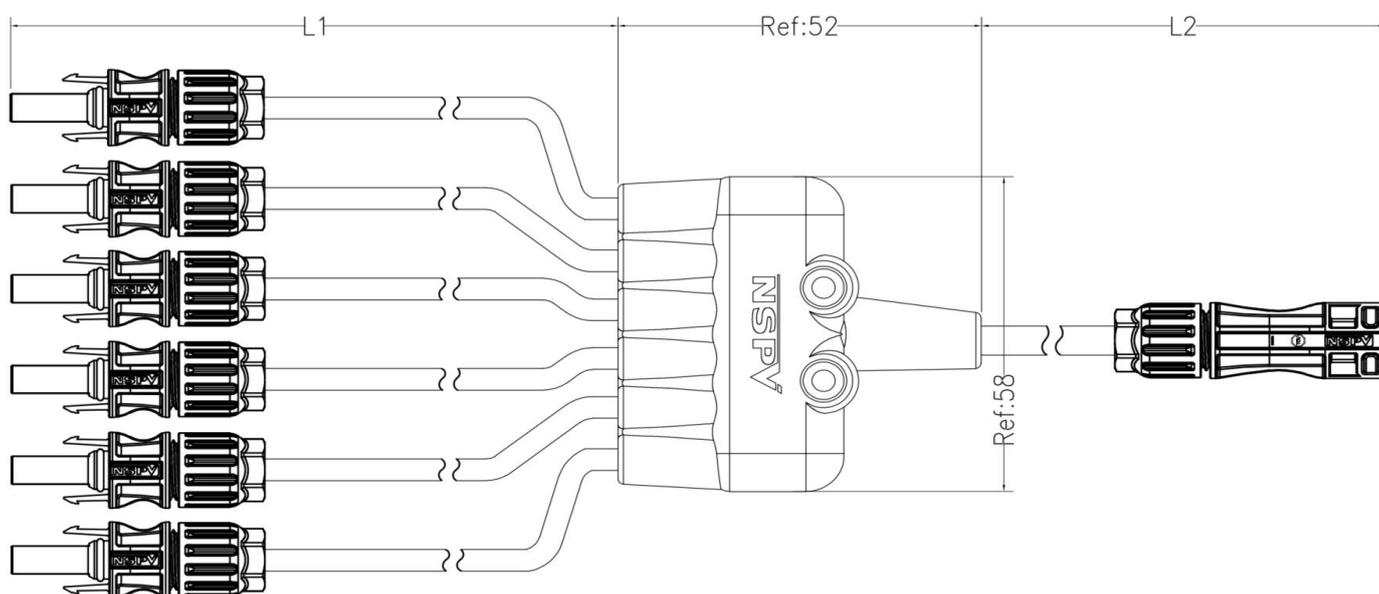

光伏6转1型线束 PV 6 to 1 Cable Assembly

产品规格

Product Specifications

绝缘材料 Insulation material	PPE/TPE	安全等级 Safety degree	II
额定电流 Rated current	30-60A	过压等级 Overvoltage category/Pollution degree	CATIII/2
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40℃...+90℃(IEC)
连接器接触电阻 Typical contact resistance	<5 mΩ	适配电线规格 Suitable cable cross sections	1.5/ 2.5/ 4/ 6/ 10mm ²
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 limiting temperature	Upper 110℃(IEC)
保护等级 Degree of protection	IP68		

图示:

Drawing:

■ Y-Cable 6M1F // 61Y15***

L3:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input checked="" type="checkbox"/> 4.0mm ²
		<input type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

L4:	Cable Size:	<input type="checkbox"/> 1.5mm ²	<input type="checkbox"/> 2.5mm ²	<input type="checkbox"/> 4.0mm ²
		<input checked="" type="checkbox"/> 6.0mm ²	<input type="checkbox"/> 10.0mm ²	
	Color of wire:	<input type="checkbox"/> Red	<input checked="" type="checkbox"/> B/K	
	Cable Length:	100	mm	

