

N-TYPE MONO CRYSTALLINE HALF CUT MODULE

680 / 685 / 690 / 695 / 700 / 705 / 710 / 715 Watts

Lynx Series



Overview

N-type solar cells (TOPCon) are seen as the technology of the future. N-type (TopCon) technology guarantees high performance and low degradation of the PV module, substantially improving the results and the yield in the time. "Lynx" Series module is the ideal solution for end users who want a Quality PV & reliable product over time and a fast turnaround on their investments.


Key Benefits



Zero light induced Degradation



30 Years Limited Product Warranty



Higher yield per surface area




Low Pmax Temperature Coefficient



Low LCOE



Higher Light Conversion

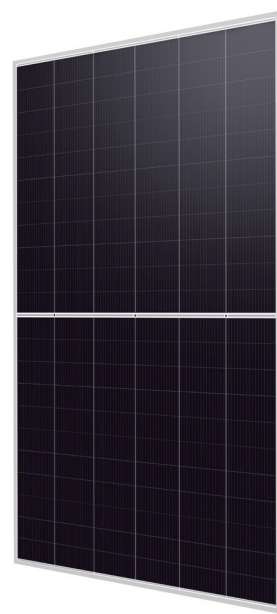

Guaranteed mechanical resistance to severe weather conditions



Positive Tolerance




100 % electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE Fire safety Class C according to UL790
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Power Tolerance	Guaranteed +0/+5W (STC condition)
Warranties	<ul style="list-style-type: none"> • 30-year limited product warranty • 15-year manufacturer warranty on 93,40% of the nominal performance • 30-year transferable linear power output warranty

Linear Performance Warranty

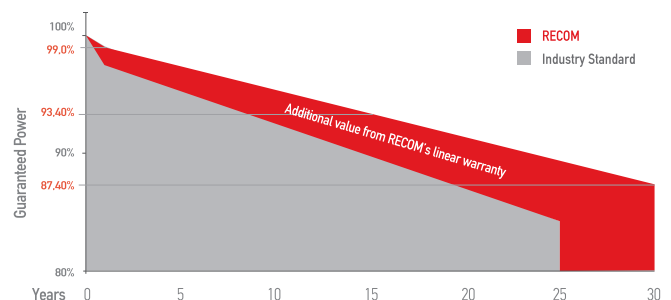

First Year Output	≥ 99.0%	2-30 Year Decline	≤ 0.40%	30 Year Output	≥ 87.40%
-------------------	---------	-------------------	---------	----------------	----------

Lynx

N-TYPE MONO CRYSTALLINE HALF CUT MODULE

RCM-xxx-8NM (xxx=680-715)

Electrical Characteristics


POWER CLASS ⁽¹⁾			680		685		690		695		700		705		710		715	
Testing Condition			STC ⁽²⁾		NMOT ⁽³⁾		STC		NMOT		STC		NMOT		STC		NMOT	
Maximum Power	Pmax	[Wp]	680	516.60	685	520.30	690	524.00	695	527.80	700	531.50	705	533.50	710	537.30	715	542.60
Maximum Power Voltage	Vmp	[V]	39,70	37,20	39,90	37,40	40,10	37,60	40,30	37,80	40,50	38,00	40,70	38,00	40,90	38,20	41,10	38,50
Maximum Power Current	Imp	[A]	17,13	13,88	17,17	13,91	17,21	13,94	17,25	13,97	17,29	14,00	17,33	14,04	17,37	14,07	17,40	14,10
Open Circuit Voltage	Voc	[V]	47,50	45,00	47,70	45,10	47,90	45,30	48,10	45,50	48,30	45,70	48,50	45,80	48,70	45,90	48,90	46,30
Short Circuit Current	Isc	[A]	18,11	14,61	18,15	14,64	18,19	14,67	18,23	14,70	18,27	14,74	18,31	14,78	18,35	14,81	18,39	14,83
Module Efficiency	Eff	[%]	21,89		22,05		22,21		22,37		22,53		22,70		22,86		23,02	
Maximum Series Fuse	Ir	[A]	30															
Maximum System Voltage	Vsys	[V]	1500V DC (IEC)															

(1) Measurement Tolerances: P_{max} (± 3%), I_{sc} & V_{oc} (± 3%) - Power Classification 0/+5W
(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5
(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

Mechanical Data

Dimensions	2384 mm x 1303 mm x 30 mm
Weight	33.9 Kg
Cell Type	N-Type - 210mm x 105mm (2 x 66 Pcs) - G12
Front Glass	3.2 mm Tempered and low iron glass + Anti Reflective Coating
Rear Side	Anti-aging film
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass diodes
Connector	MC4 compatible
Output cable	4mm ² - Length: 350 mm or customized


Dimensions

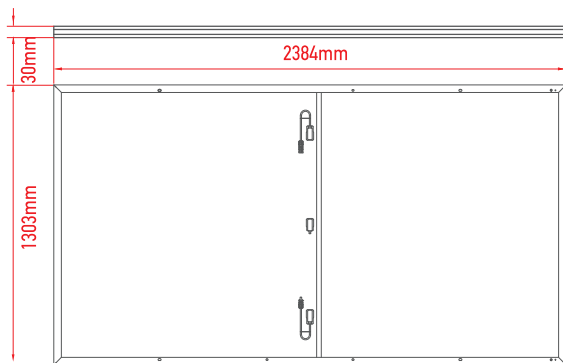

RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

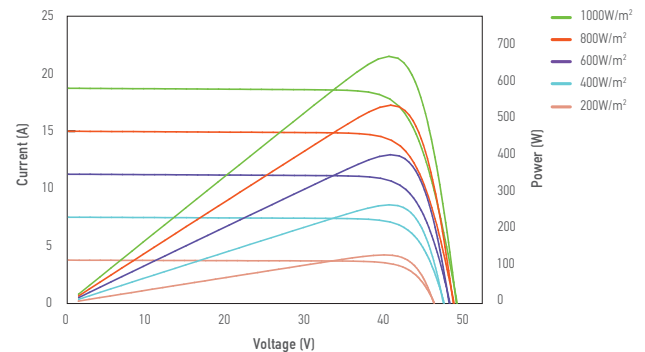

Temperature Characteristics

P _{max} Temperature Coefficient	-0.300% / °C
V _{oc} Temperature Coefficient	-0.250% / °C
I _{sc} Temperature Coefficient	+0.046% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Module Temperature (NMOT)	43 ± 2 °C

Packing Configuration

Container	40'HC
Pieces per Pallet	31
Pallets per Container	18
Pieces per Container	(31+31)x9=594 pcs