


# V SERIES

*solar way ,shining life*

## NB-195~205W-MRT topcon

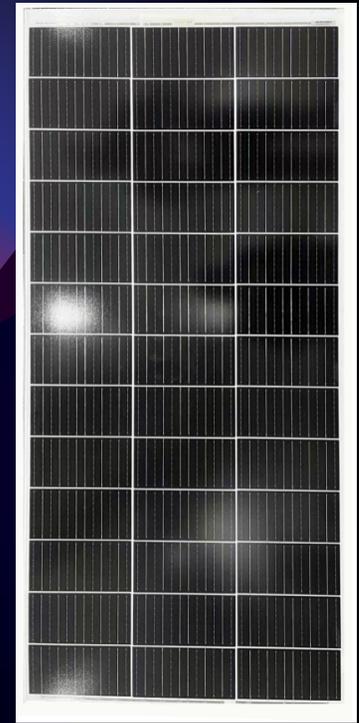

### ● V SERIES

NABAI redefined the high-efficiency module series by integrating 210mm\*210mm Topcon silicon wafers with multi-busbar and Half-cut cell technologies. NABAI panel combined creative technology effectively and extremely improved the module efficiency and power output.

### ● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
  - Sand, acid, salt and hail stones
  - 2400 Pa wind load and 5400 Pa snow load
  - Anti-PID

### ● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


### ● PRODUCT CERTIFICATION



### ● INSURANCE

**PICC**

### ● WARRANTY

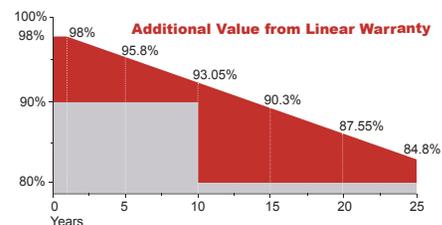

## Electrical Characteristics

Module Type	NB-195W-MRT	NB-200W-MRT	NB-205W-MRT
	STC	STC	STC
Maximum Power at STC (Pmp)	195	200	205
Maximum Power Voltage (Vmp)	21.9	22.0	22.1
Maximum Power Current (Imp)	8.90	9.09	9.28
Open Circuit Voltage (Voc)	25.30	25.5	25.70
Short Circuit Current (Isc)	9.35	9.54	9.73
Module Efficiency at STC( $\eta_m$ )	19.4	19.9	20.4
Power Tolerance	(± 3%)		
Maximum System Voltage	600V DC		
Maximum Series Fuse Rating	20A		

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25°C, AM=1.5  
Power measurement tolerance: +/-3%

## Temperature Characteristics



Pmax Temperature Coefficient	-0.34 %/°C
Voc Temperature Coefficient	-0.26 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature(NOCT)	45±2 °C

## Mechanical Specifications

External Dimensions	1480*680*35mm
Weight	10.0kg
Solar Cells	Half-cut G12 Topcon Mono (39pcs)
Front Glass	3.2mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm <sup>2</sup> , 250mm(+)/350mm(-) or Customized Length
Mechanical Load	Front side 5400Pa/ Rear side 2400Pa

## Packing Configuration

	1480*680*35mm
Container	40'HQ
Pieces per Carton	2
PCS/container	1680
or Customized	

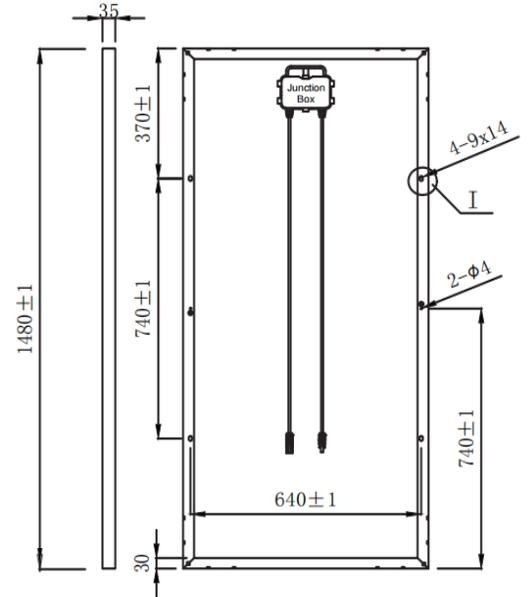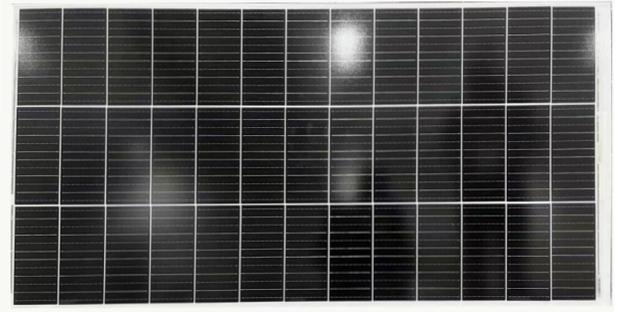

## I-V Curve

