

光伏2转1 YH型线束含MC4连接器


PV 2 to1 YH Type Cable Assembly With MC4 Orign Connector

产品规格
Product Specifications

绝缘材料 Insulation material	PPE/TPE/PA	安全等级 Safety degree	II
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
额定脉冲电压 Rated Impulse voltage	12KV	安装方式 Installation type	户外, 抗紫外线(F1) Outdoor,UV resistant(F1)
测试电压 Test voltage	8kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+85°C(IEC)
连接器接触电阻 contact resistance	≤ 0.25 mΩ	适配电线规格 Suitable cable cross sections	1.5~10mm ² /16~8AWG
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	连接方式 Connecting system	压接 Crimp connection
保护等级 Degree of protection	IP68(1m,1H)	温度上限 Upper limiting temperature	110°C(IEC)
过压等级 Overvoltage category/Pollution degree	CATIII/2	额定脉冲电压 Rated Impulse voltage	16kV
符合标准 Regulatory approval	TUV/CE(IEC62852:2014)		

图示:
Drawing:

YSSB44-002A

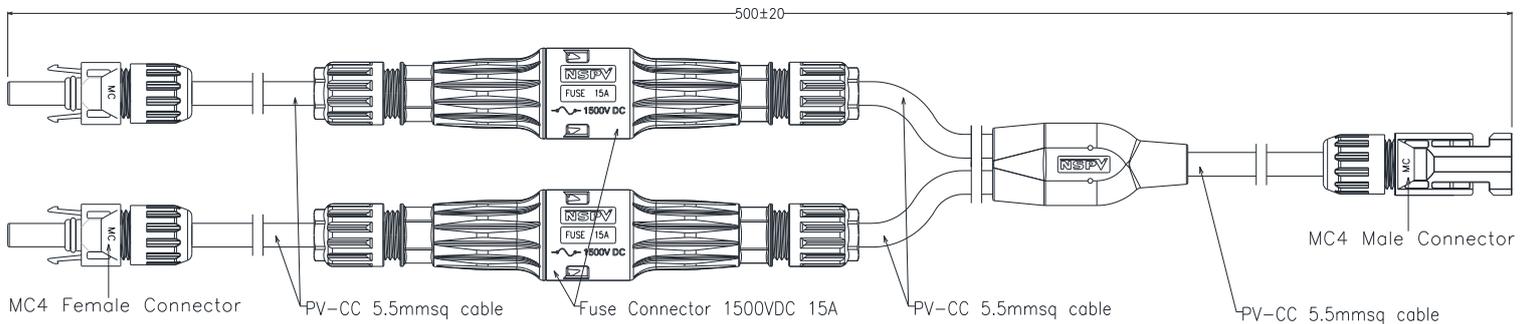

YSSB44-001A

