



MONOCRYSTALLINE SINGLE GLASS 530-555W REESUN144H-182M

High efficiency and low LID
PERC monocrystalline technology
HALF-CELL technology

-  Excellent Anti-PID performance
-  Guaranteed power tolerance (0 ~+5W)
-  Excellent wind and snow loads up to 5400Pa under specific installation methods
-  Lower current, higher power generation, lower risk of hot spots
-  Excellent low irradiation performance
-  Higher component conversion efficiency (up to 21.48%)
-  12-year product quality warranty, 25-year linear output power warranty



Comprehensive Product And System Certification

IEC 61215, IEC 61730

ISO 9001:2015: ISO Quality Management System Certification

ISO 14001:2015: ISO Environmental management system certification

ISO 45001:2018 Occupational Health and Safety Management System Certification

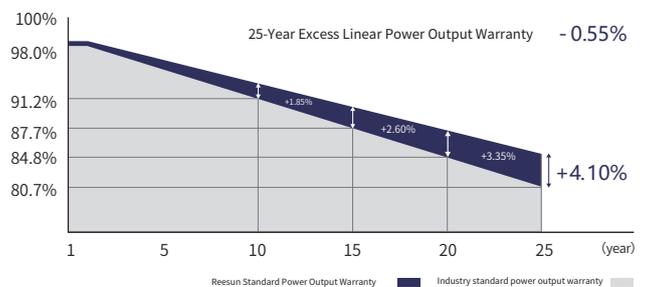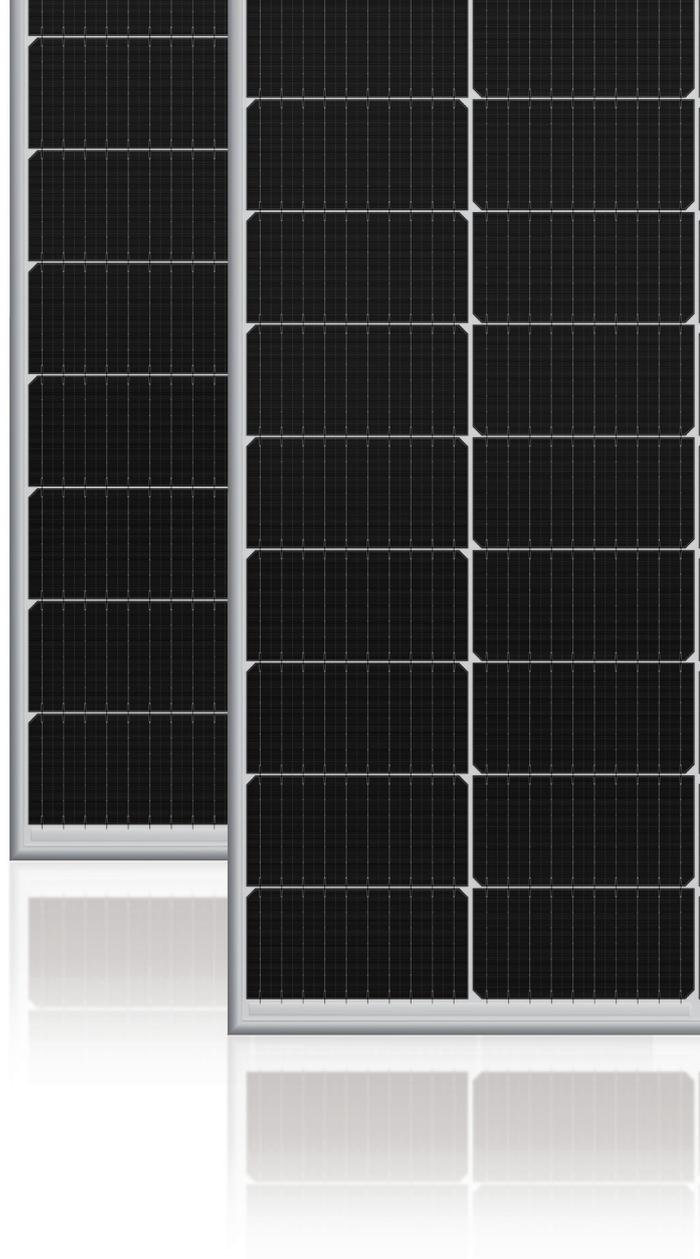

*Reesun Solar reserves the right to interpret technical changes and test specifications.

REESUN144H-182M530-555W

Electrical Performance Parameters


Maximum power test tolerance : $\pm 3\%$

Component model	530W		535W		540W		545W		550W		555W	
	STC	NOCT										
Testing environment	STC	NOCT										
Maximum power [Pmax/W]	530	401	535	405	540	408	545	412	550	416	555	420
Maximum power voltage [Vmp/V]	40.74	38.57	40.88	38.78	41.01	38.99	41.15	39.20	41.28	39.43	41.42	39.66
Maximum power current [Imp/A]	13.01	10.39	13.09	10.43	13.17	10.47	13.25	10.51	13.33	10.55	13.41	10.59
Open circuit voltage [Voc/V]	49.26	46.18	49.4	46.31	49.53	46.43	49.67	46.55	49.80	46.68	49.94	46.85
Short circuit current [Isc/A]	13.69	11.01	13.77	11.05	13.85	11.09	13.93	11.13	14.01	11.17	14.09	11.21
Component efficiency [%]	20.51		20.70		20.89		21.09		21.28		21.48	

Maximum power test Common Standard Test Environment (STC) irradiance 1000W/m², atmospheric quality AM1.5, module temperature 25 ° C
Nominal operating battery temperature (NOCT): irradiance 800W/m², ambient temperature 20 ° C, atmospheric quality AM1.5, wind speed 1m/s

Mechanical And Operating Parameters

Number of battery cells	144(6×24)
Junction box	IP68 Three diodes
Output cable	4mm ² , length 300mm, Customizable length
Glass	3.2mm Single layer coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	27kg \pm 3%
Size	2279×1134×35mm
Packing	31pcs per pallet 620pcs per 40'HC
Working temperature	-40°C ~ +85°C
Power tolerance	0~+5 W
Current and voltage tolerance	$\pm 4\%/\pm 3\%$
Maximum system voltage	DC1500V (IEC)
Maximum fuse current rating	25A
Nominal operating battery temperature	45 \pm 2°C
Safety level	Class II
Fire rating	Class C

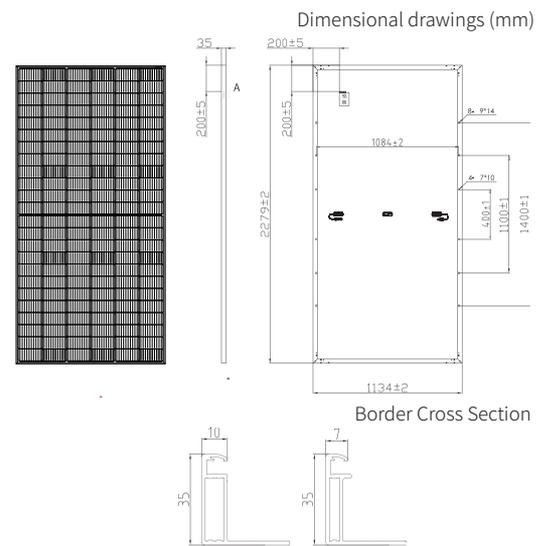

Temperature Coefficient(STC)

Short circuit current temperature coefficient of frame section	+0.048%/°C
Open circuit voltage temperature coefficient	-0.270%/°C
Maximum power temperature coefficient	-0.350%/°C

Mechanical Load

Front maximum static load	5400Pa
Maximum back static load	2400Pa
Hail test	25mm hail, impact at 23 m/s

I-V Curve (REESUN144H-182M-550W)

