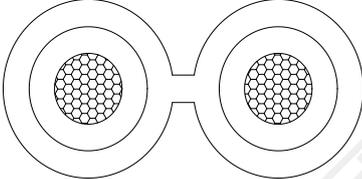


Standard 标准		Sheet NO/编号	S230228024
EN50618		Construction Figure/截面图:	
Construction 规格型号			
H1Z2Z2-K 2X6.0mm ²			
product usage 产品用途			
Irradiation cross-linked halogen-free low smoke polyolefin insulation and sheath photovoltaic power generation system			
cable construction 电缆结构			
Conductor 导体	Construction Item/规格 mm ²	6.0mm ²	
	Construction/构造 mm	78/0.29±0.008	
	Material/材质	Tinned Copper	
	O.D/绞合外径 mm	2.95	
Insulation 绝缘	Material/材质	XLPO	
	Avg.Thick/标准厚度 mm	0.80	
	Min.Thick最小厚度 mm	0.62	
	O.D/线径 mm	4.55±0.15	
	Color/颜色	Black、Red	
Jacket 护套	Material/材质	XLPO	
	Avg.Thick/标准厚度 mm	0.80	
	Min.Thick最小厚度 mm	0.58	
	O.D/线径 mm	6.15±0.3×12.9±0.5	
	Color/颜色	Black(Red as strip)	
Marking 印字	△ TÜV DC1500V H1Z2Z2-K 2×6.0mm ² Jiukai Special Cable (Shanghai) Co., Ltd		
Electric Characters 电气性能			
Voltage rating 额定电压 V	1500	Conductor resistance 导体电阻 ΩKM Max at20°C	3.39
Test voltage of finished cable 成品电缆测试电压 V	6500		
Physical Properties 物理性能			
Elongation of unaged values 老化前伸长率 %	≥125	Temperature rating 温度等级 °C	-40~90
Tensile strength of unaged values 老化前抗张强度 N/mm ²	≥6.5	bending radius 弯曲半径	≥6D
APPROVED 批准	CHECKED 审查	DESIGNED 编制	APPROVED BY THE CLIENT 客户认可
赵亮亮	/	王宗豪	