

Uhome-CIS 60kWh

Industrial & Commercial Storage Cabinet

Flexible Expansion

Maximum support for 8 machines in AC parallel, expandable to 0.48MWh;

IP54

Resistant to outdoor installation with strong environmental adaptability;

Smart BMS

Automatic balancing between packs.



PRODUCT FEATURES



Safe&Reliable

Equipped with multiple protection mechanisms such as fire protection, surge protection, circuit breakers, relays, etc;



Economical

Pre-made machine delivered as a whole for easy transportation& installation& maintenance, saving up to 15% in costs.



Minimalist

Front and rear double door design, compact structure, clear and simple layout, resulting in high space utilization.



Intelligent


Platform supports remote monitoring& maintenance& intelligent balancing strategy for battery life cycle consistency& revenue improvement.



Usability

Integrated distribution box, easier to use and convenient for later maintenance.

● Technical Specifications

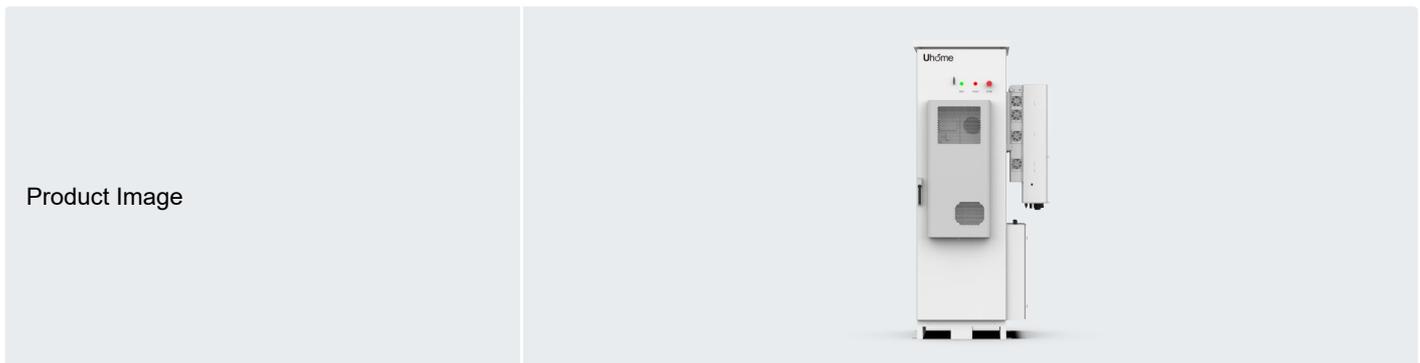

Model	60kWh/51.2V/100Ah(LFP 5000SM/M)	60kWh/614.4V/100Ah
Battery Type	LiFePO4 Prismatic	
Nominal Energy	5.12kWh	61.44kWh
Usable Energy*	4.7kWh	57.1kWh
Nominal Capacity	100Ah	
Nominal Voltage	51.2V	614.4V
Operating Voltage	48~56V	576~672V
Recommended Charge&Discharge Current	50A/50A	
Max Charge/Discharge Current	80A/80 A	
Peak Discharge Current	200A(3S)	
Peak Discharge Power	10kW(3S)	120kW(3S)
Recommended Depth of Discharge (DOD)	93%	
Charging Temp. Range	From 0~55 °C	
Discharging Temp. Range	From -10~55 °C	
Cycle Life	≥5000@25 °C	
Scalability	1 Parallel/12 Series	8 Parallel
WIFI Module	Uhome	
Communication	CAN	CAN/RS485
IP Rating	IP20	IP54
Recommended Humidity	5%~95%(No condensed water)	
Cooling Type	Forced air cooling	Air Condition cooling
Color	White(optional)	
Installation	Rack Installation	Ground Installation
Net Weight	56±2kg	950±2 kg
Dimension(L*W*H)	442*133*618mm	1000*850*2045mm
Protection	Over-current/Over-voltage/Short circuit/ Under-voltage/Over temperature	
Warranty	5/10 years(optional)*	
Certification	UN38.3/CE/IEC62619	

Testing conditions based on temperature 25°C at the beginning of life.

*Total Energy/Usable Energy measured under specific conditions by Uhome 0.2C CC-CV and based on recommended DOD(93%).

It is recommended to configure the inverter by yourself and choose Solis 50kW three phase inverter as an option.

● Technical Specifications



Models	30K	40K	50K
Input DC(PV side)			
Recommended Max.PV Array Size	60kW	80kW	100kW
Max. usable PV Input Power	60kW	80kW	96kW
Max. Input Voltage	1000V		
Rated Voltage	600V		
Start-up Voltage	180V		
MPPT Voltage Range	150~850V		
Max. Input Current	3*40A	4*40A	
Max. Short Circuit Current	3*60A	4*60A	
MPPT Number/Max. Input Strings Number	3/6	4/8	
Battery			
Battery Type	Li-ion		
Battery Voltage Range	120~800V		
Max. Charge/Discharge Power	33kW	44kW	55kW
Max. Charge/Discharge Current	70A*2		
No. of Cattery Inputs	2		
Max. charge/discharge power of each input□	33kW	40kW	40kW
Communication	CAN/RS485		
Output AC(Grid side)			
Rated Output Power	30kW	40kW	50kW
Max. Apparent Output Power	30kVA	40kVA	50kVA
Rated Grid Voltage	3/N/PE,220V/380V 3/N/PE,230V/400V		
Rated Grid Frequency	50Hz/60Hz		
Rated Grid Output Current	45.6A/43.3A	60.8A/57.7A	76A/72.2A
Max. Output Current	45.6A/43.3A	60.8A/57.7A	76A/72.2A
Power Factor	>0.99(0.8 leading ~0.8 lagging)		
THDi	<3%		
Input AC(Grid side)			
Max. AC Passthrough Current	91.2/86.6A	121.6A/115.4A	152A/144.4A
Rated Input Voltage	3/N/PE,220V/380V 3/N/PE,230V/400V		
Rated Input Frequency	50Hz/60Hz		
Output AC(Back-up)			
Rated Output Power	30kW	40kW	50kW
Max. Apparent Output Power	1.6 times of rated power, 2s		
Back-up Switch Time	<10ms		
Rated Output Voltage	3/N/PE,220V/380V 3/N/PE,230V/400V		
Rated Frequency	50Hz/60Hz		
Rated Output Current	45.6A/43.3A	60.8A/57.7A	76A/72.2A
THDv(@linear load)	<2%		

● Technical Specifications



Models	30K	40K	50K
Efficiency			
Max. efficiency		97.8%	
EU efficiency		97.4%	
BAT Charged by PV Max. efficiency		98.5%	
BAT Charged/Discharged to AC Max. efficiency		97.5%	
Protection			
Anti-islanding Protection		Yes	
Output Over Current Protection		Yes	
Short Circuit Protection		Yes	
Integrated DC Switch		Optional	
DC Reverse-polarity Protection		Yes	
Surge Protection		DC Type II / AC Type II	
Integrated AFCI (DC arc-fault circuit protection)		Yes	
General Data			
Dimensions(W*H*D)		530*880*290 mm	
Weight		73kg	
Topology		Transformerless	
Self-consumption(night)		<25W	
Operating Ambient Temperature Range		-25~+60 C	
Relative Humidity		0~95%	
Ingress Protection		IP66	
Noise		<65dB(A)	
Cooling Concept		Interlligent Redundant Fan-cooling	
Max. Operation Altitude		4000m	
Grid Connection Standard	EN 50549-1, VDE4105 CEI 0-21, CEI 0-16, NC-RFG TypeB, NRS 097-2-1 ED 2.1		
Safety/EMC Standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1, IEC 61000-2		

JOIN US

Tel

+86-510-88998080

E-mail

marketing@uhomeenergy.com

Web

www.uhomeenergy.com

Address

No.1 Qianluo Rd,Huishan District,Wuxi City