

# Everest G12R Series 495-520W


**108-cell** Bifacial HJT Half-cell  
Double-glass Solar Module

- 
**HJT 3.0** HJT-0BB Technology  
Shorter current transport path, better low-light performance, and higher power generation.
- 
**Sealing with PIB**  
Stronger moisture resistance, greater air impermeability to extent module lifespan.
- 
**Ideal Choice for Rooftop Photovoltaic Systems**  
Black module, bifacial power generation, suitable for residential, industrial and commercial rooftop projects.



#### Complete System and Product Certifications:

IEC61215, IEC61730  
 ISO9001: 2015 Quality Management System  
 ISO14001: 2015 Environment Management System  
 ISO45001: 2018 Occupational Health and Safety  
 IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing  
 IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

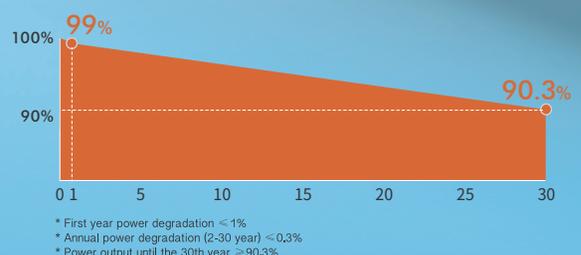


# HSN-210R-B108 495-520W

108-Half-Cell Bifacial HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re

## Engineering Drawings

Unit: mm

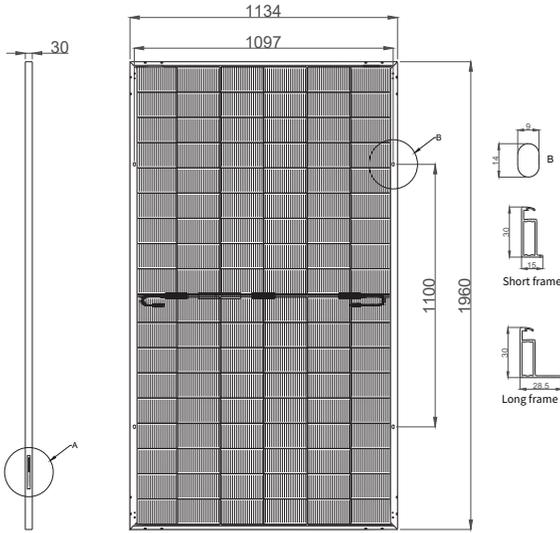

## Mechanical Characteristics

Cell Type	HJT
No. of Cells	108 (6x18)
Dimensions	1960x1134x30mm
Weight	27.1 kg
Junction Box	IP68
Cable	4mm <sup>2</sup> ; ±1250mm or customized; UV resistant
Connector	PV-H1 / MC4-Evo 2 / Others
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

## Electrical Characteristics

### STC

HSN-210R-B108	DSB495	DSB500	DSB505	DSB510	DSB515	DSB520
Maximum Power (Pmax/W)	495	500	505	510	515	520
Module Efficiency (%)	22.3	22.5	22.7	22.9	23.2	23.4
Voltage at Pmax (Vmp/V)	34.05	34.16	34.27	34.38	34.49	34.60
Current at Pmax (Imp/A)	14.54	14.64	14.74	14.84	14.94	15.04
Open Circuit Voltage (Voc/V)	40.65	40.76	40.87	40.98	41.09	41.20
Short Circuit Current (Isc/A)	15.37	15.48	15.59	15.70	15.81	15.92

STC: AM1.5, 1000W/m<sup>2</sup>, 25°C.



### BNPI

	555	560	566	571	577	583
Maximum Power (Pmax/W)	555	560	566	571	577	583
Voltage at Pmax (Vmp/V)	34.17	34.28	34.39	34.50	34.61	34.72
Current at Pmax (Imp/A)	16.25	16.36	16.47	16.58	16.69	16.80
Open Circuit Voltage (Voc/V)	40.79	40.90	41.01	41.12	41.23	41.34
Short Circuit Current (Isc/A)	17.24	17.36	17.48	17.61	17.73	17.85

BNPI: AM1.5, 1000W/m<sup>2</sup>, 135W/m<sup>2</sup>, 25°C.

## I-V Curve

(HSN-210R-B108DSB520)

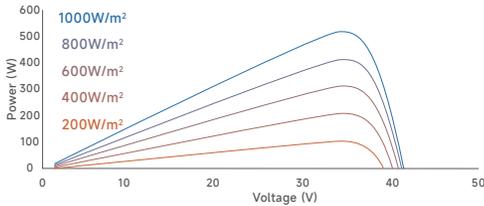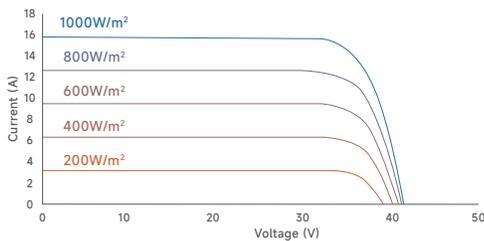

## Temperature Coefficients

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

## Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

## NOCT

	377	381	385	389	393	397
Maximum Power (Pmax/W)	377	381	385	389	393	397
Voltage at Pmax (Vmp/V)	32.53	32.63	32.73	32.83	32.93	33.03
Current at Pmax (Imp/A)	11.62	11.70	11.78	11.86	11.94	12.02
Open Circuit Voltage (Voc/V)	38.80	38.90	39.01	39.11	39.22	39.32
Short Circuit Current (Isc/A)	12.28	12.37	12.46	12.55	12.64	12.72

NOCT: AM1.5, 800W/m<sup>2</sup>, 20°C, 1m/s.

## Packaging

	40'HQ
Modules Per Pallet	36
Pallets Per Container	24
Modules Per Container	864



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2025

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China  
 Tel: 0086-563-3318095 www.huasunsolar.com  
 sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.

1.0\_20250814\_D