

# COLOR Module Series

## 410W<sup>+</sup>

Color More, Power More!



**HJT-0BB Technology**  
Shorter current transport path, better low-light performance, and higher power generation.



Diverse architectural applications for a colorful fresh look  
High-power modules suitable for rooftops, curtain walls, balcony railings, and all living scenarios.

\*More options:



ForestGreen



RoyalBlue



SlateGrey




SaddleBrown



Complete System and Product Certifications:

- IEC61215, IEC61730
- ISO9001: 2015 Quality Management System
- ISO14001: 2015 Environment Management System
- ISO45001: 2018 Occupational Health and Safety
- IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing
- IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

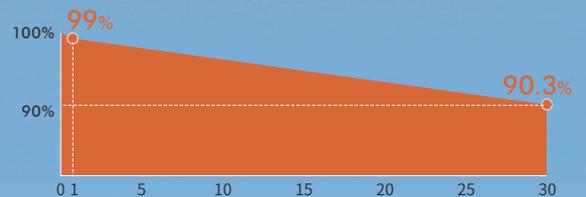

\* First year power degradation  $\leq 1\%$   
\* Annual power degradation (2-30 year)  $\leq 0.3\%$   
\* Power output until the 30th year  $\geq 90.3\%$


# HSN-210R-S96 410W

96-Half-Cell HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re



## Engineering Drawings

Unit: mm

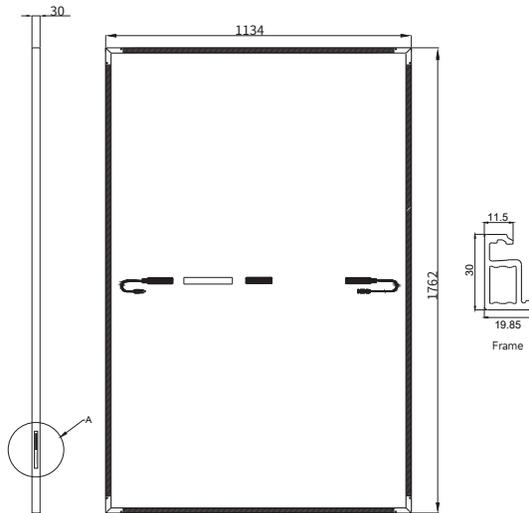

## I-V Curve

(HSN-210R-S96DSC410)

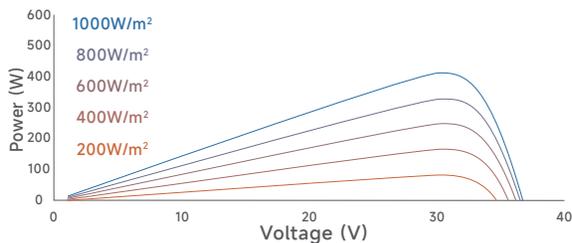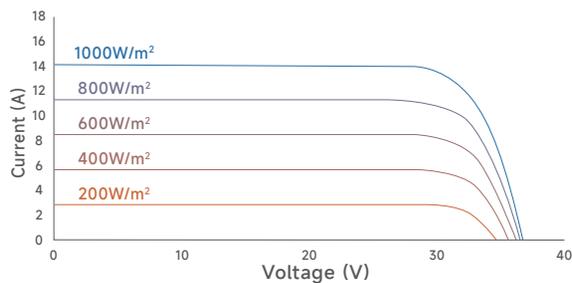

## Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Safety Class	Class II

## Mechanical Characteristics

Cell Type	HJT
No. of Cells	96 (6x16)
Dimensions	1762 x 1134 x 30mm
Weight	23.5 kg
Junction Box	IP68
Cable	4mm²; ±1250mm or customized; UV resistant
Connector	PV-H1 / MC4-Evo 2 / Others
Frame	Composite material frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

## Electrical Characteristics

### STC

HSN-210R-S96	DSC410
Maximum Power (Pmax/W)	410
Module Efficiency (%)	20.5
Voltage at Pmax (Vmp/V)	31.05
Current at Pmax (Imp/A)	13.26
Open Circuit Voltage (Voc/V)	36.80
Short Circuit Current (Isc/A)	14.13

STC: AM1.5, 1000W/m², 25°C.

### NOCT

Maximum Power (Pmax/W)	313
Voltage at Pmax (Vmp/V)	29.54
Current at Pmax (Imp/A)	10.60
Open Circuit Voltage (Voc/V)	35.12
Short Circuit Current (Isc/A)	11.29

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

## Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

## Packaging

	40'HQ
Modules Per Pallet	36
Pallets Per Container	26
Modules Per Container	936



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2025

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China  
 Tel: 0086-563-3318095 www.huasunsolar.com  
 sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.

2.0\_20250814