

# Everest G12R Series 435-460W

**96-cell** Bifacial HJT Half-cell  
Double-glass Solar Module



**HJT**  
3.0 HJT-0BB Technology  
Shorter current transport path, better low-light performance, and higher power generation.



**Sealing with PIB**  
Stronger moisture resistance, greater air impermeability to extent module lifespan.




**Ideal Choice for Rooftop Photovoltaic Systems**  
Black module, bifacial power generation, suitable for residential, industrial and commercial rooftop projects.



**Complete System and Product Certifications:**

- IEC61215, IEC61730
- ISO9001: 2015 Quality Management System
- ISO14001: 2015 Environment Management System
- ISO45001: 2018 Occupational Health and Safety
- IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing
- IEC/TSG2994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

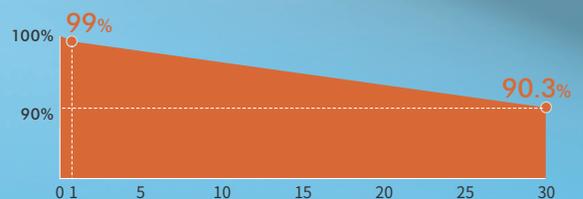


\* First year power degradation  $\leq 1\%$   
 \* Annual power degradation (2-30 year)  $\leq 0.3\%$   
 \* Power output until the 30th year  $\geq 90.3\%$

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re


## Engineering Drawings

Unit: mm

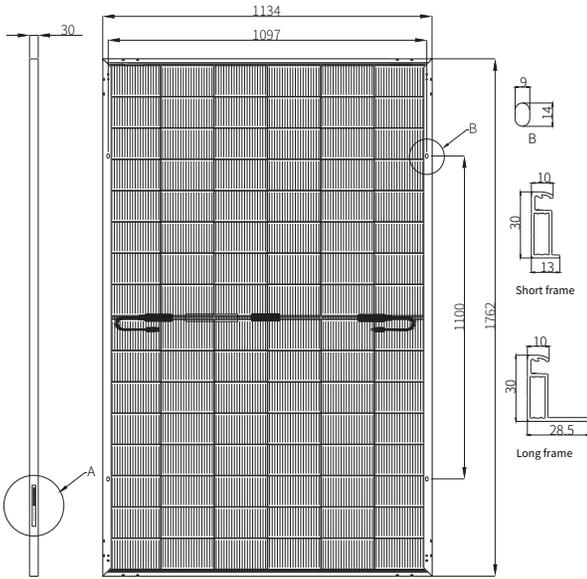

## I-V Curve

(HSN-210R-B96DSB460)

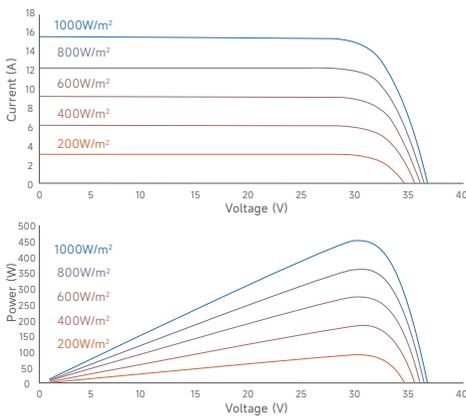

## Temperature Coefficients

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

## Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

## Mechanical Characteristics

Cell Type	HJT
No. of Cells	96 (6x16)
Dimensions	1762x1134x30mm
Weight	21.6 kg
Junction Box	IP68
Cable	4mm <sup>2</sup> ; ±1250mm or customized; UV resistant
Connector	PV-H1 / MC4-Evo 2 / Others
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 1.6mm

## Electrical Characteristics

### STC

HSN-210R-B96	DSB435	DSB440	DSB445	DSB450	DSB455	DSB460
Maximum Power (Pmax/W)	435	440	445	450	455	460
Module Efficiency (%)	21.8	22.0	22.3	22.5	22.8	23.0
Voltage at Pmax (Vmp/V)	30.50	30.61	30.72	30.83	30.94	31.05
Current at Pmax (Imp/A)	14.27	14.38	14.49	14.60	14.71	14.82
Open Circuit Voltage (Voc/V)	36.42	36.52	36.62	36.72	36.82	36.92
Short Circuit Current (Isc/A)	15.20	15.31	15.42	15.53	15.64	15.75

STC: AM1.5, 1000W/m<sup>2</sup>, 25°C.

### BNPI

Maximum Power (Pmax/W)	487	493	499	504	510	515
Voltage at Pmax (Vmp/V)	30.61	30.72	30.83	30.94	31.05	31.16
Current at Pmax (Imp/A)	15.94	16.07	16.19	16.31	16.44	16.56
Open Circuit Voltage (Voc/V)	36.55	36.65	36.75	36.85	36.95	37.05
Short Circuit Current (Isc/A)	17.05	17.17	17.29	17.42	17.54	17.66

BNPI: AM1.5, 1000W/m<sup>2</sup>, 135W/m<sup>2</sup>, 25°C.

### NOCT

Maximum Power (Pmax/W)	332	335	339	343	347	351
Voltage at Pmax (Vmp/V)	29.12	29.23	29.34	29.45	29.55	29.65
Current at Pmax (Imp/A)	11.40	11.49	11.58	11.67	11.76	11.84
Open Circuit Voltage (Voc/V)	34.76	34.86	34.95	35.05	35.14	35.24
Short Circuit Current (Isc/A)	12.15	12.24	12.32	12.41	12.50	12.59

NOCT: AM1.5, 800W/m<sup>2</sup>, 20°C, 1m/s.

## Packaging

	40'HQ
Modules Per Pallet	36
Pallets Per Container	26
Modules Per Container	936

