


## 双玻组件边连接器EC1A Glass To Glass Edge Connector EC1A

### 产品规格 Product Specifications


绝缘材料 Insulation material	PA/CU	安全等级 Safety degree	II
额定电压 Rated voltage	1000V&1500VDC	阻燃等级 Flame class	UL94-V0
额定脉冲电压 Rated Impulse voltage	16KV	安装方式 Installation type	户外, 抗紫外线(F1) Outdoor, UV resistant(F1)
测试电压 Test voltage	8kV(50Hz, 1min)	环境温度范围 Ambient temperature range	-40°C...+85°C(IEC)
连接器接触电阻 contact resistance	≤ 0.25 mΩ	连接方式 Connecting system	Soldering for Ribbon Plug-in for connector
金属导体材料 Contact material	铜, 镀锡 Copper, Tin plated	温度上限 Upper limiting temperature	110°C(IEC)
保护等级 Degree of protection	IP65/IP67	参考标准 Reference standard	TUV/CE(IEC62852:2014)
过压等级 Overvoltage category/Pollution degree	CATIII/2		

### 图示: Drawing:


Edge side connector:EC1AM

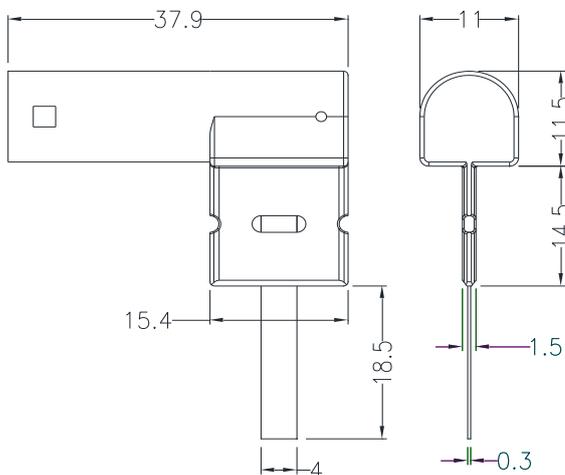

Edge side connector:EC1AF

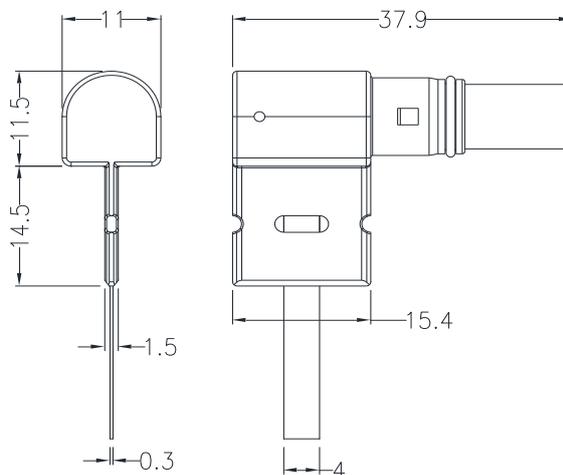


应用：  
**Application:**

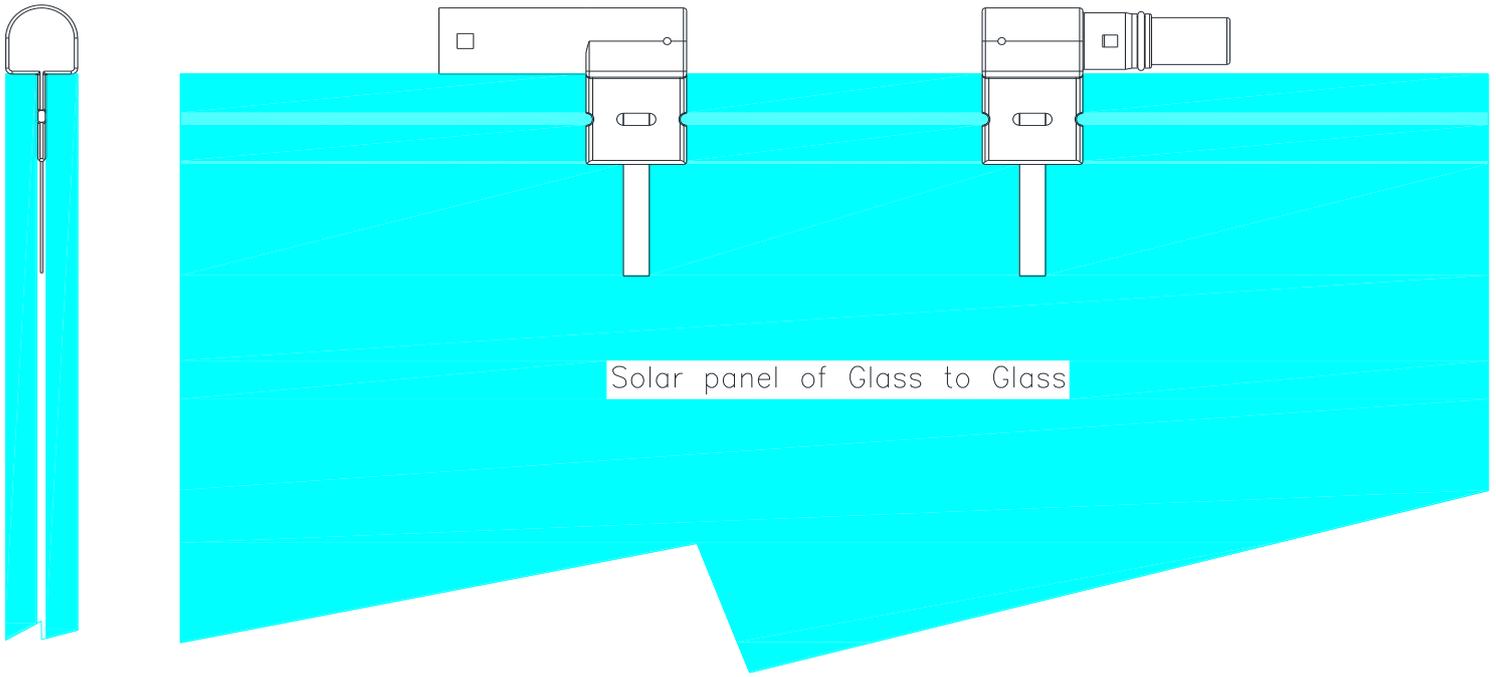

连接器的搭配  
**Connector Selection**

Customized the length with mini connector.

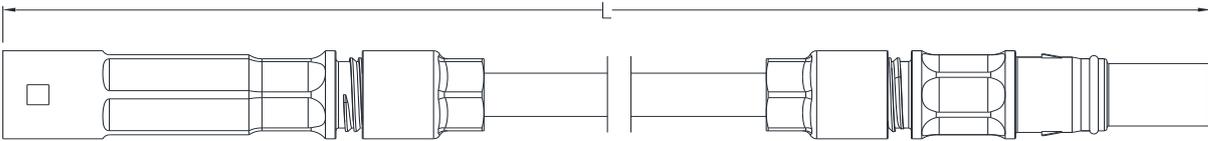

Optional dust cap male and female

