


PREMIUM

BISOL® Laminate

Monocrystalline PV Laminates / BDO 440-460 Wp

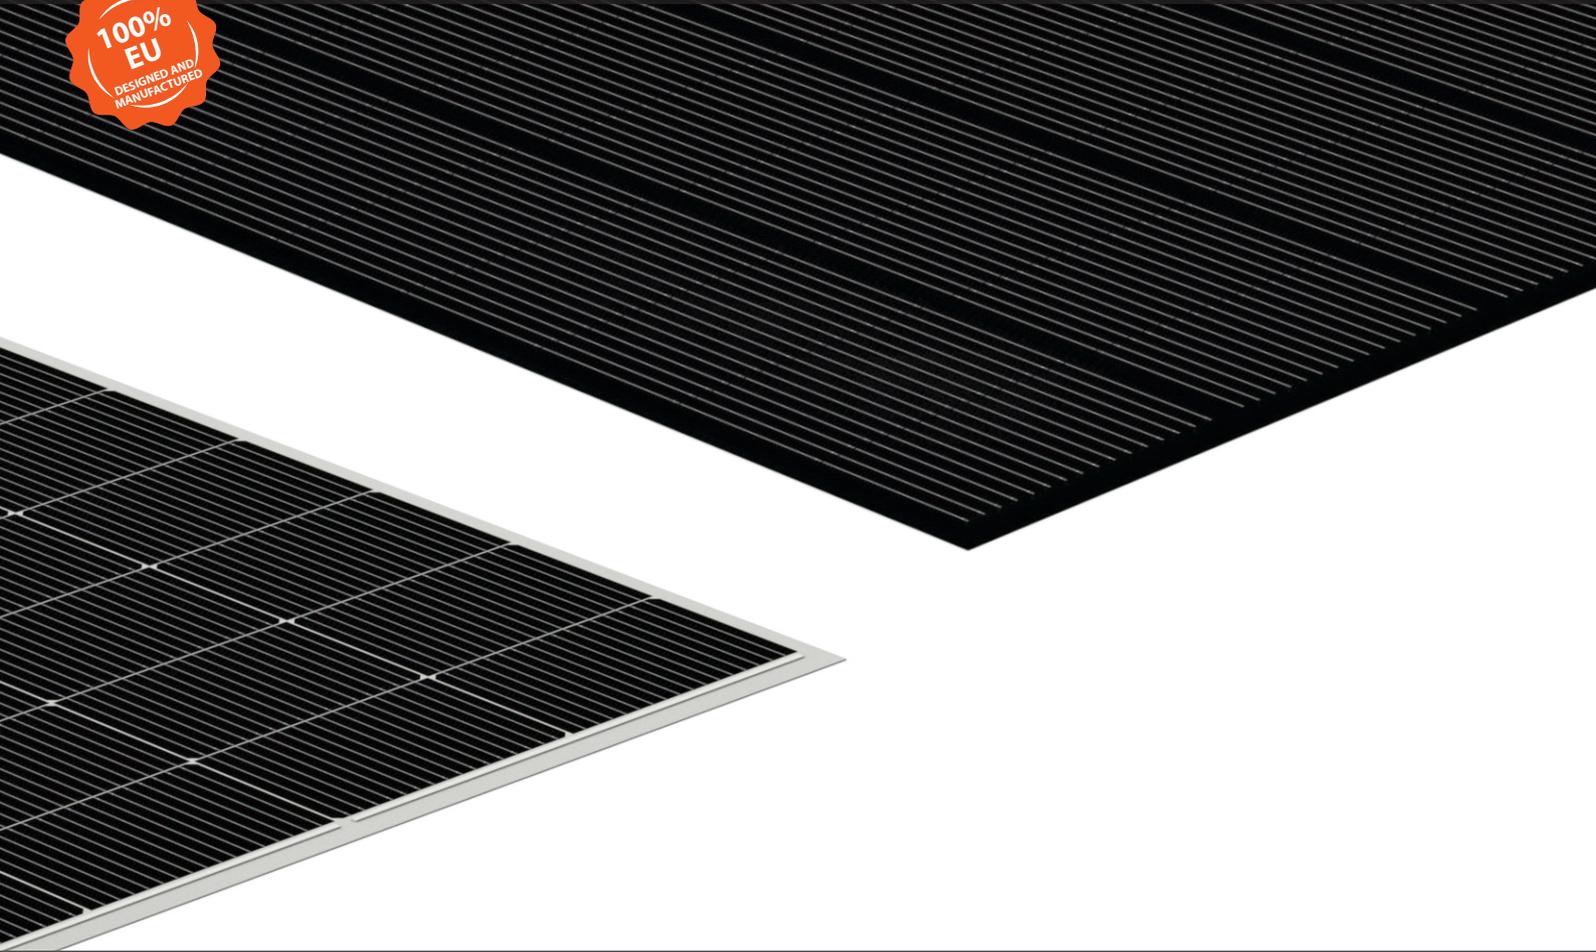

Made in Europe



15 years of EU Guarantee



Hail and Fire resistant



Uncompromisingly certified



Ideal for integration



PID and LETID free



Highest Efficiency




Module sorting technology



Low maintenance costs


Guarantee:

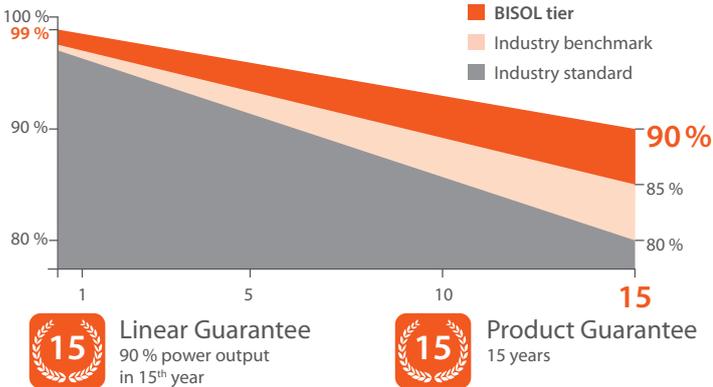


In compliance with:




I-V Curve at Various Irradiation Levels

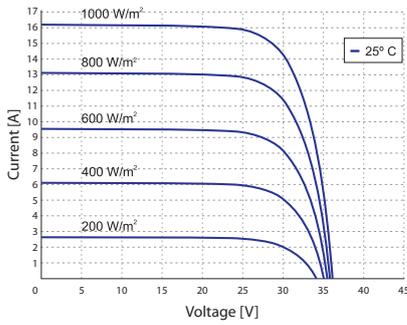

I-V Curve at Various Cell Temperatures

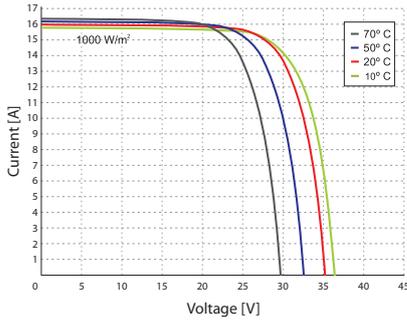

Dimensions

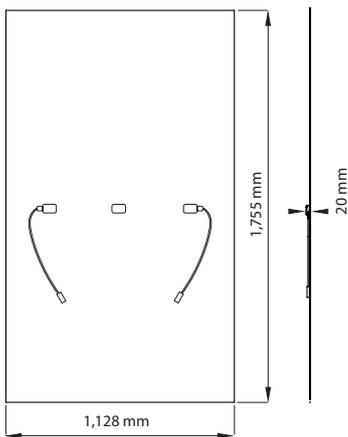

Electrical Specifications @ STC (1,000 W/m², AM 1.5, 25 °C):

Module Type	BDO	440	450	460
Nominal Power	P_{MPP} [W]	440	450	460
Short Circuit Current	I_{SC} [A]	16.0	16.1	16.2
Open Circuit Voltage	V_{OC} [V]	34.9	35.3	35.9
MPP Current	I_{MPP} [A]	15.0	15.2	15.4
MPP Voltage	V_{MPP} [V]	29.3	29.6	29.9
Module Efficiency	η_M [%]	22.0	22.5	23.0
Cell Efficiency	η_C [%]	24.0	24.5	25.1
Power Output Tolerance			0/+5 W	
Maximum System Voltage			1,500 V	
Maximum Reverse Current			30 A	
Protection Class			Class II	

Additional power classes available upon request. | Efficiency at irradiation 200 W/m²: 99.3 % of STC efficiency or higher. | Tolerances for V_{OC} and I_{SC} and other electrical parameters are ± 3 %.

Electrical Specifications @ NOCT (800 W/m², AM 1.5, 42 °C, Wind 1 m/s):

Module Type	BDO	440	450	460
Nominal Power	P_{MPP} [W]	338	346	353
Short Circuit Current	I_{SC} [A]	12.9	13.0	13.1
Open Circuit Voltage	V_{OC} [V]	33.4	33.8	34.4
MPP Current	I_{MPP} [A]	12.1	12.3	12.4
MPP Voltage	V_{MPP} [V]	27.9	28.2	28.4

Thermal Specifications:

Current Temperature Coefficient	α	+ 0.05 %/°C
Voltage Temperature Coefficient	β	- 0.25 %/°C
Power Temperature Coefficient	γ	- 0.29 %/°C
NOCT		42 °C (± 3 °C)
Temperature Range		- 40 °C to + 85 °C

Mechanical Specifications:

Length x Width x Thickness	1,755 x 1,128 x 20 mm
Weight	19 kg
Solar Cells	96 Half-Cut c-Si / 182.25 x 105 mm
Junction Box / Connectors	3 bypass diodes / MC4 compatible; On demand: MC4 EVO2 / IP 68
Cable Length	Default: 1,200 mm On demand (for portrait orientation): 300 mm
Glass	3.2 mm AR coating tempered glass / high-transparency / low-iron content
Certified Test Load (Snow / Wind)	Depending on Laminate fixation system*

*Certification process can be provided by BISOL upon special request. Additional charges may apply. Tolerances of values are ± 5 %. Unspecified product properties remain under full discretion of BISOL Production.

Packaging Information:

Modules per Pallet	Packing Dimension: Length/Width/Height	Stackable	Packing Weight	Tot. Nr. of Pallets/Load
30	195 x 116 x 136 cm	2 pallets	600 kg	26*

*Loading of laminates requires the use of truck with loading opening higher than 272 cm.